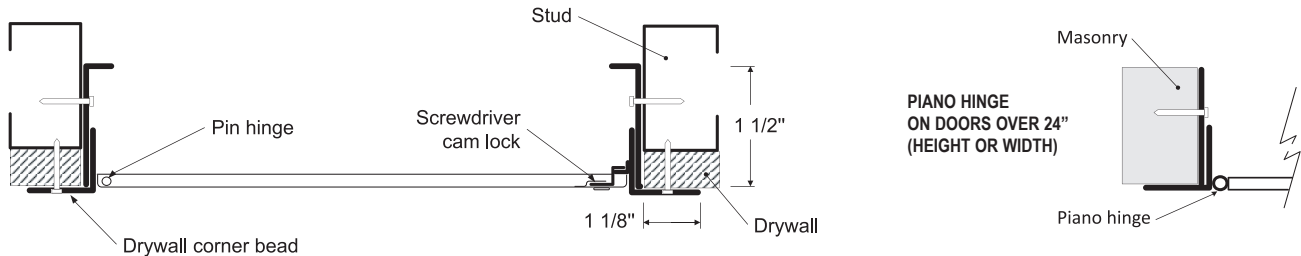


**GENERAL PURPOSE ACCESS DOOR  
WITH DRYWALL FLANGE**
**AHD-GYP**
**INSTALLATION**

**DIMENSIONS AND APPEARANCE**


LEED ready: This product contributes to LEED® credits.

 Your odd sizes:  
Made in 5 days

DOOR SIZE W x H inches (MM)	NUMBER OF LOCKS	WEIGHT LBS KG	
8 x 8 (203 x 203)	1	3	1.4
10 x 10 (254 x 254)	1	4	1.8
12 x 12 (304 x 304)	1	5	2.3
14 x 14 (356 x 356)	1	7	3.2
16 x 16 (406 x 406)	1	8	3.6
18 x 18 (457 x 457)	1	10	4.5
* 24 x 24 (609 x 609)	1	15	6.8
* 24 x 36 (609 x 914)	2	22	10

Rough wall opening is door size + 1/4" or + 6mm  
 \*Piano hinge on doors over 24 inches (height or width)  
 The IHD-GYP model is recommended for over 1296 sq. inches

Click here to Online Product Page and Pricing

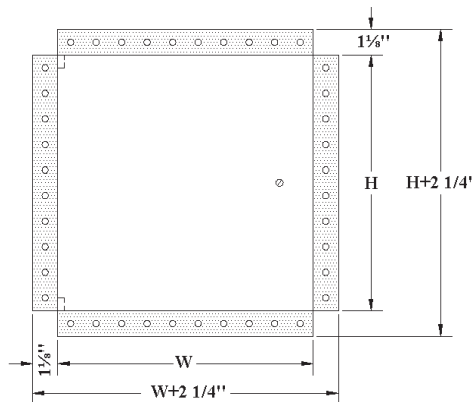
**DESCRIPTION AND MATERIAL SPECIFICATION**

**Material:** 16 gauge cold rolled steel  
**Hinge:** hidden pin hinge  
 continuous piano type on doors  
 over 24" (height or width)  
**Lock / latch:** screwdriver operated cam latch  
**Finish:** high quality white powder coat primer  
**Packaging:** individually wrapped, 1 per box  
**GYP:** drywall corner beads flange

**POPULAR OPTIONS** For complete list of options go to:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

**Lock / latch:** key operated cylinder cam latch,  
 hex head cam latch, pinned hex  
 head cam latch, handle operated cam latch,  
 mortise preparation for cylinder.

**Material:** stainless steel 304 #4 (brushed finish)  
**Gasketing:** neoprene gasket


**PROJECT DATA**

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

**Email:** [info@accessdoorsandpanels.com](mailto:info@accessdoorsandpanels.com)  
**Website:** [www.accessdoorsandpanels.com](http://www.accessdoorsandpanels.com)

**Phone:** 1-800-609-2917  
**Fax:** 1-888-626-2907

**Address:**  
 P.O. Box 66738 #76520 Saint Louis