



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors and roofs



DUCT DOORS for Fibreglass ducts HD-5070-F

Application

- Economical access to fibreglass ducts

Product Features

- These doors are for use in low to medium pressure fibreglass ducts
- Hinged door panel

Options:

- ALUMINUM • STAINLESS STEEL

HD-5070-F "Hinged" Fibreglass Duct Doors Specifications:

Door: 24 gauge galvanized steel

Frame: 24 gauge galvanized steel

Hinge: Continuous aluminum piano hinge

Insulation: Insulation 1" Micro-AIRC M/F TYPE-475 R value 7.7

Gasketing: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame and also between frame and duct


Latch: Self tightening, hand operated cam latch



STANDARD SIZES *(Special sizes available upon request)*

NOMINAL DOOR SIZE W X H			WEIGHT PER DOOR		
inches	mm	No. latches	lbs.	kg.	
6 X 6	150 X 150	1	1.0	0.5	
8 X 8	200 X 200	1	1.25	0.6	
10 X 10	250 X 250	1	2.0	0.9	
12 X 12	300 X 300	1	2.5	1.1	
14 X 14	350 X 350	2	3.25	1.5	
16 X 16	400 X 400	2	4.0	1.8	
18 X 18	450 X 450	2	5.5	2.5	
24 x 24	609 X 609	2	12.0	5.4	

Duct opening is the same size as the NOMINAL SIZE.
For detailed specifications see submittal sheet.

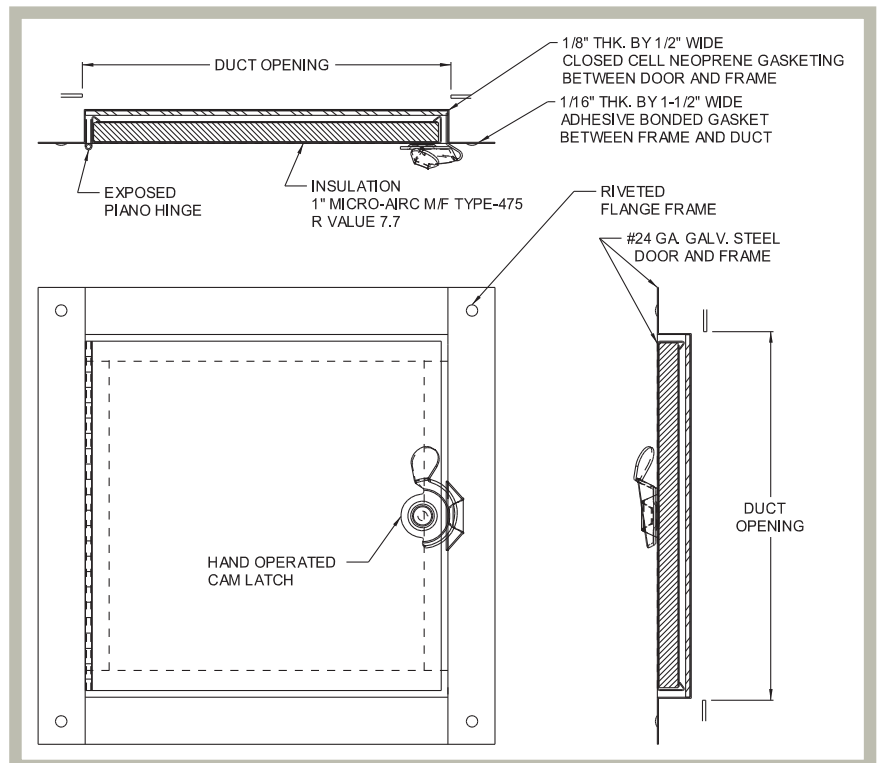

[Click here to Online Product Page and Pricing](#)

For more information, contact AccessDoorsAndPanels www.AccessDoorsAndPanels.com

Phone: 1-800-609-2917

Fax: 1-888-626-2907

Email: info@accessdoorsandpanels.com