DETAIL & SUBMITTAL SHEET



SPECIFICATIONS:

Material: Steel 16 ga. door and

mounting frame

Door: Flush to frame with reinforced edges

Hinge: Continuous exposed stainless steel piano hinge

Gasketing: continuous Bulb Trim Seal

Latch: Stainless Steel philips head screws standard.

Finish: Steel: 5 stage iron phosphate with prime coat of

white baked enamel

OPTIONS (at additional cost)


☐ Type 304 stainless steel with a #4 satin polish


☐ Stainless Steel allen head screws


☐ Stainless Steel philips head screws

~	Item No.	Door Size W x H	Wall Opening W x H	Ship Wt. Lbs.
	ADWT	12 x 12	12 3/8 x 12 3/8	8
	ADWT	18 x 18	18 3/8 x 18 3/8	15
	ADWT	24 x 24	24 3/8 x 24 3/8	22
	ADWT	30 x 30	30 3/8 x 30 3/8	32
	ADWT	30 x 48	30 3/8 x 48 3/8	44

Click here to Online Product Page and Pricing

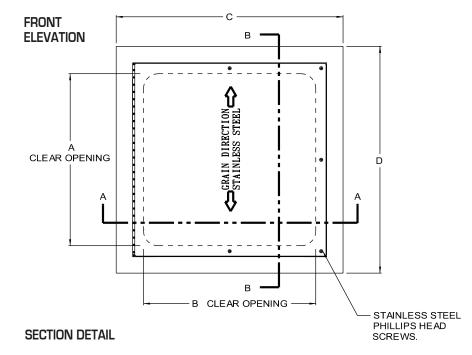





The WB ADWT is a flush access door that has been tested for air infiltration and water penetration. The Door and frame are fully welded and gasketed. This access door is ideal for use in laboratories, clean rooms, operating rooms, etc. where an airtight/watertight seal is required.

AccessDoorsAndPanels

Phone: 1-800-609-2917 Fax: 1-888-626-2907

Email: info@accessdoorsandpanels.com Website: www.AccessDoorsAndPanels.com PO Box 66738 #76520, Saint Louis, MO 63166 6738

