

SUBMITTAL/TECHNICAL DATA SHEET



DESCRIPTION

The Howe Green 2500 Series Floor Access Covers are suitable for all types of timber floors – up to 22mm solid hardwood floors, timber strip and heavy-duty laminate flooring to enable permanent, safe access to services concealed underneath.

The 2500 Series is a Stainless Steel Single Access Cover Trim available for use in wood flooring areas. Manufactured in the UK, all covers are made to your exact specification.



SKU: **2500**

STAINLESS STEEL FLOOR ACCESS COVERS

FOR PEDESTRIAN TRAFFIC ON WOODEN SURFACES



FEATURES

- Can be fitted quickly and unobtrusively, ensuring minimum disruption.
- Lifting blocks are anchored to the inner frame. Stainless steel securing bolts are stiletto heel proof.
- Fits within a standard timber floor, removing the need to cut rebates underneath the timber flooring.
- Provides easy access to underfloor services using lifting keys.
- Screwed sideways into the floor to allow movement with a floating timber floor

SPECIFICATION

COVER TYPE: Single

FLOOR FINISHES: Heavy duty timber floors - Junckers solid hardwood floors, timber strip flooring or heavy duty laminate flooring.

PERFORMANCE: Pedestrian traffic (including wheeled trolleys, sack trucks etc.) only.

SUITABILITY: Wooden floors


LOADING: Pedestrian traffic, including trolleys / sack trucks

WEIGHT: 16 kg/m²

For a complete list of options visit www.AccessDoorsAndPanels.com

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<



TYPICAL FLOOR FINISHES:

All types of timber floors – up to 22mm solid hardwood floors, timber strip flooring, heavy-duty laminate flooring.

PERFORMANCE:

Light-duty, suitable for pedestrian traffic, including wheeled trolleys and sack trucks.

SUITABILITY:

Commercial buildings, educational institutions, civic and public buildings subject to pedestrian footfall traffic where permanent access to underfloor facilities and services is required.

LOADING:

Light - Pedestrian

DEPTH:


Overall Frame Depth 25mm, Max. Flooring Thickness 22mm

CLEAR INTERNAL OPENING:

Minimum Dimensions 100mm, for Maximum Dimensions Contact us.

OVERALL FRAME SIZE:

Minimum Dimensions 220mm, for Maximum Dimensions Contact us.

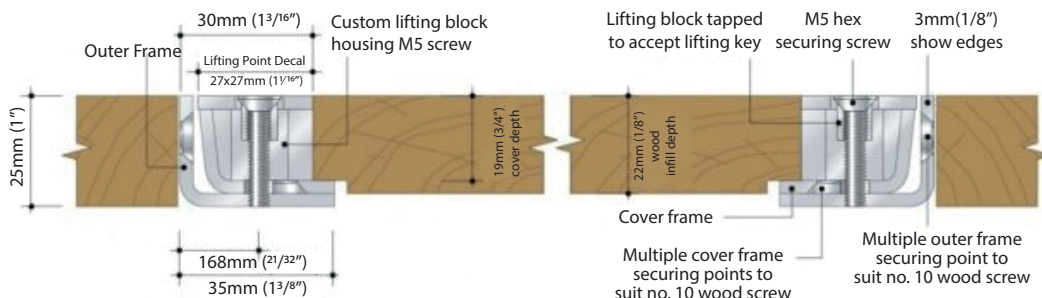

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@accessdoorsandpanels.com