

## APPLICATION

The DWF fire-rated, knee wall door enables access to non-habitable space located behind a vertical wall. White finished door sash is 2.6 inches thick and is filled with fire-proof insulation material. The door structure reduces heat transfer in the winter or summer months and additionally prevents from quick spread of fire. The door can be installed in a right and left opening version.

## FEATURES

- Ready for quick installation
- Fire classification as per EN 13501:2 - EI145
- 3 years warranty

## SPECIFICATIONS

**DOOR:**  
Insulated with fire-proof material, 2½"  
Thermal insulation thickness: 2¾"  
Finished on both sides with white HDF board.

**FRAME:**  
Made of pinewood.  
Depth (Jamb): 3½"  
Equipped with a seal.

**EQUIPMENT:**  
Handle with a lock to ensure tight closing.  
1¾ wide wooden finishing slats in natural colour.



SKU: **DWF FIRERATED**  
**KNEE WALL ACCESS DOOR**  
FIRE-RATED

## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

### SIZES:

No.	Size
1	21 x 31
2	27 x 35

### TECHNICAL PARAMETERS:


No.	Description	Value	Standard
1	Door heat transfer coefficient	U = 0.11 BTU/hft²F	PN-EN 10211:2008
2	Tightness	4th class*	EN 12207
3	Fire resistance (on both sides)	EI,45	EN 13501-2

\* Manufacturer's internal calculations

### ASSEMBLY INFORMATION

DWF knee wall door comes pre assembled and must be installed in framed rough opening in accordance with the included fitting instructions. One must ensure that the gap between door frame and rough opening framing is properly insulated.

For more detailed information check the second page

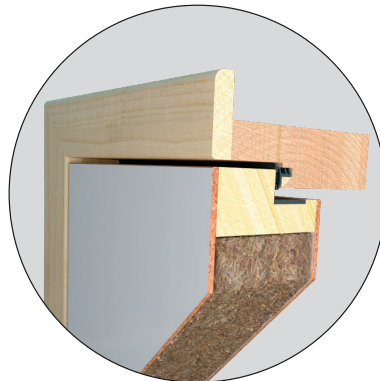

For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)

**DWF  
FIRERATED**

**FIRE-RATED  
KNEE WALL ACCESS DOOR**

Dimension W x H		21 x 31	27 x 35
Rough opening [in.]	A x B	21½ x 31¼	27½ x 35¼
Frame external dimensions [in.]	W x L	21 x 31	27 x 35
Frame internal dimensions [in.]	M x N	19 x 28¾	24¾ x 32¾
Frame depth [in.]	S	3½	
Frame thickness[in.]	Z	1	

