

## APPLICATION

The DWT highly insulated knee wall access door is a product designed primarily for installation in knee walls. It enables access to non-habitable room located behind a knee wall, and at the same time provides excellent insulation barrier and ensures high tightness.

## FEATURES

- Ready for quick installation
- 3 years warranty

## SPECIFICATIONS

**DOOR:**  
 Insulated, total thickness: 2½"  
 Thermal insulation thickness: 2¾"  
 Finished on both sides with white HDF board.

**FRAME:**  
 Made of pinewood.  
 Depth (Jamb): 3½"  
 Equipped with a seal.

**EQUIPMENT:**  
 Handle  
 1¾ wide wooden finishing slats in natural colour.



SKU: **DWT THERMO**  
**KNEE WALL ACCESS DOOR**

## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING](#) <<

### SIZES:

No.	Size
1	21 x 31
2	27 x 35

### TECHNICAL PARAMETERS:


No.	Description	Value	Standard
1	Door heat transfer coefficient	U = 0.11 BTU/hft²F	PN-EN 10211:2008
2	Tightness	4th class*	EN 12207

\* Manufacturer's internal calculations

### ASSEMBLY INFORMATION

DWT knee wall door comes pre assembled and must be installed in framed rough opening in accordance with the included fitting instructions. One must ensure that the gap between door frame and rough opening framing is properly insulated.

For more detailed information check the second page

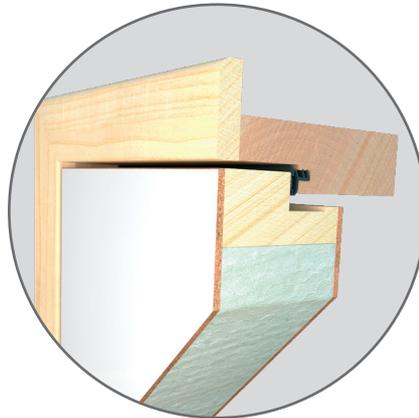

For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

## PROJECT DATA

**Custom Sizes Available - Fast!**

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
1-888-457-1275

FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
 SAINT LOUIS, MO  
 63166-6738  
 USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)



# DWT THERMO

# KNEE WALL ACCESS DOOR

Dimension W x H		21 x 31	27 x 35
Rough opening [in.]	A x B	21½ x 31¼	27½ x 35¼
Frame external dimensions [in.]	W x L	21 x 31	27 x 35
Frame internal dimensions [in.]	M x N	19 x 28¾	24¾ x 32¾
Frame depth [in.]	S	3½	
Frame thickness [in.]	Z	1	

