

SUBMITTAL/TECHNICAL DATA SHEET



DESCRIPTIONS

The Access panel consists of a welded aluminum frame and is reinforced with aluminum square tubing. The oversized XL door is available with either 1/2" (12.7 mm) or 5/8" (15.9 mm) drywall insert.

Concealed mechanical touch-latches open the door when pressure is applied to the front of the door. Equipped with special heavy-duty hinges, the panel can easily be operated like a door, either hinged right or left- as requested and needed for the application.

The reveal of 1/16 of an inch (1.59 mm) is visible between the outer frame and door hatch.

ADVANTAGES

- Superior engineering & innovative design
- Easy ordering process
- Fast turn around times
- Quick, easy installation and flush mount into drywalls
- Solid, heavy-duty version
- To operate like a door/ opens from the side
- Available in moisture / mildew resistant green board



SKU: **F1-XL**

ALUM. FRAME ACCESS PANEL

WITH DRYWALL INLAY

DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

OPTIONS:

SD	- Screwdriver operated cam latch
FS	- Screwdriver operated four-square cam latch
Z	- Round Cylinder Lock with Key
M	- Mortise Cylinder Lock Preparation
H	- Hex Head Cam Latch
P	- Pinned Hex Head Cam Latch

This door will be produced as per customer request.

This door can be produced up to 70" (1778 mm) x 30" (762 mm)!

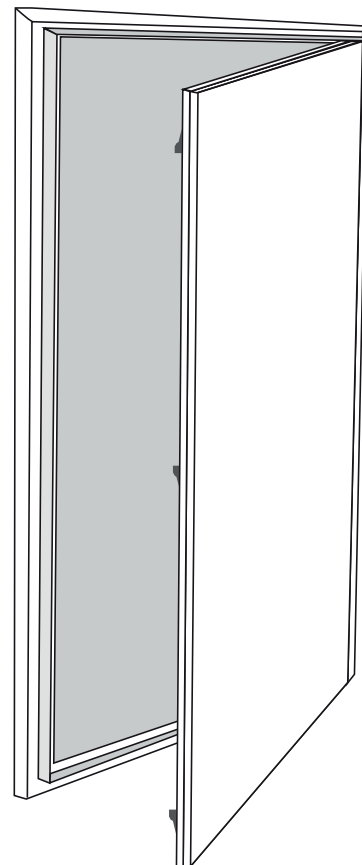

For a complete list of options visit www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@accessdoorsandpanels.com