

DESCRIPTIONS

The access panel consists of a welded aluminum frame and is available with 1/2" (12.7 mm) or 5/8" (15.9 mm) inlayed drywall and two latches.

Both an outer and an inner frame assembly consists of high grade aluminum which is bonded with a special welding process.

mm) and up the access panels are equipped with a safety-system to prevent accidental opening. This safety system must be reattached if the hatch is removed.

mm) is visible between the outer frame and door hatch. The concealed snap locks open the access panel when pressure is applied to spring loaded latch side.

The panel is designed for acoustic ceilings.

ADVANTAGES

- Fast delivery

- · Flush installation in ceilings and walls

For a complete list of options visit



For sizes 12" x 12" (305 mm x 305

The reveal of 1/16 of an inch (1.59

- Superior engineering & innovative
- Quick and easy installation
- Solid aluminum frame

www.AccessDoorsAndPanels.com





To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: F2-AT


DRYWALL ACCESS PANEL

WITH ACOUSTIC TILF



■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

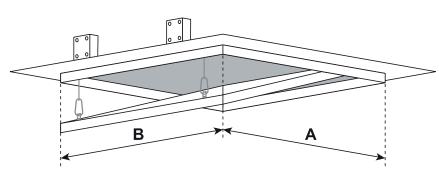

All standard sizes are available in 1/2" (12.7 mm) or 5/8" (15.9 mm) drywall.

Customized sizes can be produced in every dimension upon request.

OPTIONS:

SD - Screwdriver operated cam latch						
FS - Screwdriver operated four-square cam latch						
Z - Round Cylinder Lock with Key M - Mortise Cylinder Lock Preparation H - Hex Head Cam Latch						
						P - Pinned Hex Head Cam Latch

■ PROJECT DATA

Custom Sizes Available - Fast!

	PROJECT NAME :	QTY	w	Н	OPTIONS
	ARCHITECT:				
2	DEALER:				
	CONTRACTOR:				
	LOCATION:	SPECIAL INSTRUCTIONS:			
	DATE:				
	TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE: 1-888-457-1275 1-888-626-2907



PO BOX 66738 #76520, SAINT LOUIS, MO 63166-6738 USA



WFBSITE:

www.AccessDoorsAndPanels.com