



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

Glass fiber reinforced cement, ceiling access doors are designed to blend seamlessly into exterior soffits or ceilings

FEATURES

- Portland Cement, Fiber, Post Consumer Recycled Glass
- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant

SPECIFICATIONS

- Shell Thickness = .125" - .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **GFRC ROUND**

GLASS FIBER REINFORCED CEMENT ROUND PANEL




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE W x H INCHES (MM)	CEILING OPENING INCHES (MM)	WEIGHT	
		LBS	KG
Ø9 (229)	15 x 15 (381 x 381)	6.00	2.73
Ø12 (305)	18 x 18 (457 x 457)	9.00	4.09
Ø16 (406)	22 x 22 (559 x 559)	10.0	4.53
Ø18 (457)	24 x 24 (610 x 610)	11.0	5.00
Ø24 (610)	30 x 30 (762 x 762)	16.0	7.27

For detailed specifications see submittal sheet

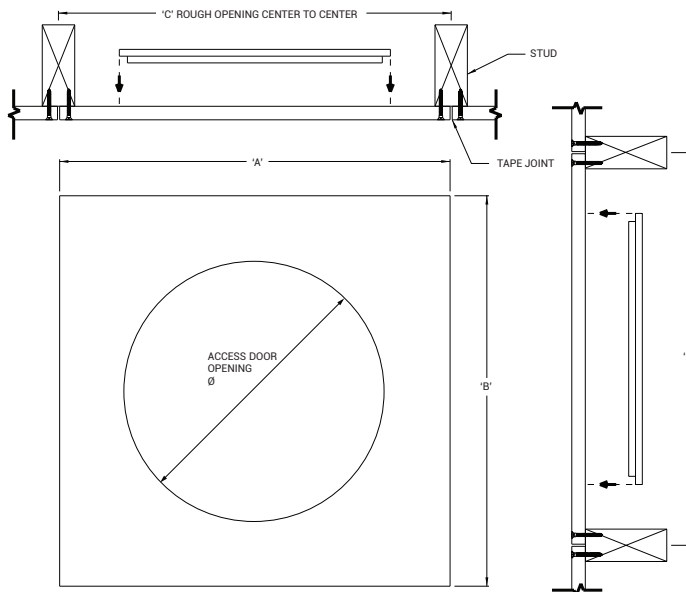

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@accessdoorsandpanels.com



SUBMITTAL



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@accessdoorsandpanels.com

GFRC ROUND

ROUND POP-OUT ACCESS PANEL

NOMINAL DOOR SIZE	A	B	C	D
9" Diameter (406)	15" (381)	15" (381)	15" (381)	15" (381)
12" Diameter (457)	18" (457)	18" (457)	18" (457)	18" (457)
16" Diameter (610)	22" (559)	22" (559)	22" (559)	22" (559)
18" Diameter (559)	24" (609)	24" (609)	24" (609)	24" (609)
24" Diameter (762)	30" (762)	30" (762)	30" (762)	30" (762)

