

SUBMITTAL/TECHNICAL DATA SHEET



DESCRIPTIONS

Recessed floor access cover from aluminum or stainless steel for hard flooring. With assisted lift spring.

Available in clear opening sizes from 450 mm / 17.7 inch (Alu) / 550 mm / 21.7 inch (SS) to 1000 mm / 39.4 inch.

SPECIFICATIONS

TYPICAL FLOOR FINISHES:

Ceramic tiles, marble, terrazzo, concrete, resin, wood and all hard floors.

Flooring thickness: max 18 mm/0.7 inch for Alu, 28 mm/1.1 inch for stainless steel.

VERSIONS:

Single cover or duct cover. Double seal optional.

APPLICATION:

Indoor & outdoor. (e.g. for frequently used access).

PERFORMANCE:

Up to 5 ton load (cars and light delivery vehicles).

SKU: **HSE-75**


RECESSED FLOOR ACCESS COVER

ALUMINUM OR STAINLESS STEEL



DIMENSIONS AND APPEARANCE


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

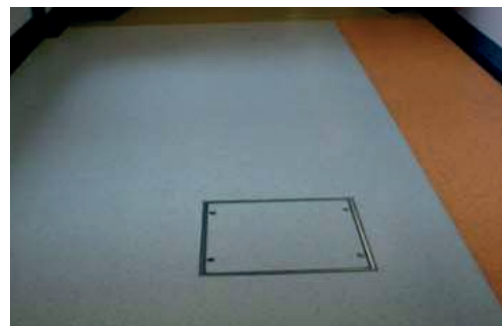

For a complete list of options visit www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@accessdoorsandpanels.com