

SUBMITTAL/TECHNICAL DATA SHEET

INVISAGRILLE

DESCRIPTION

The premium flush mounted vent and grille cover is an innovative flush access door for walls and ceilings. It is designed for installation in drywall, plaster, masonry, tile or any flush surface.

The door panel features a magnetic removable grille door which provides an architecturally pleasing appearance and provides easy access. It can be easily installed, and comes in prime coated white.

Not only that this panel is fire rated thus making it non-flammable, but it is also impact, moisture, water, and mold resistant!

This product is not only eco-friendly manufactured, but it also non-hazardous with triple fiber reinforced cement board.

APPLICATION

- Designed for 1/2" & 3/8" thick drywall installations.
- Low and high wall installations.

FEATURES

- Magnetic Removable Triple Fibre Reinforced Concrete Board Grille.
- 24 gauge galvanized satin coat steel frame
- 4 Rare Earth Magnets - .250" Diameter x .060" Thick
- Easy Installation, primed and ready for paint.
- 20 degree angled vent slots for directional venting.
- Fire Rated, Non-Flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS


- Over 9.8 square inches (63.5 Square CM) of open area.
- Slot Size - .26" X 2.9" (6.6mm X 74mm)
- 13 Angled Slots
- Overall dimensions 1/2" x 13 1/2" X 7 1/2" x 1/2" (343mm x 190.5mm x 13mm)

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **IG MAG**


PREMIUM FLUSH MOUNTED VENT & GRILLE COVERS

REMOVABLE WALL & CEILING VENT

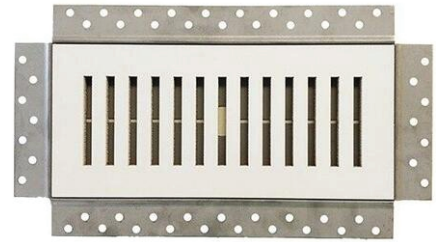


DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

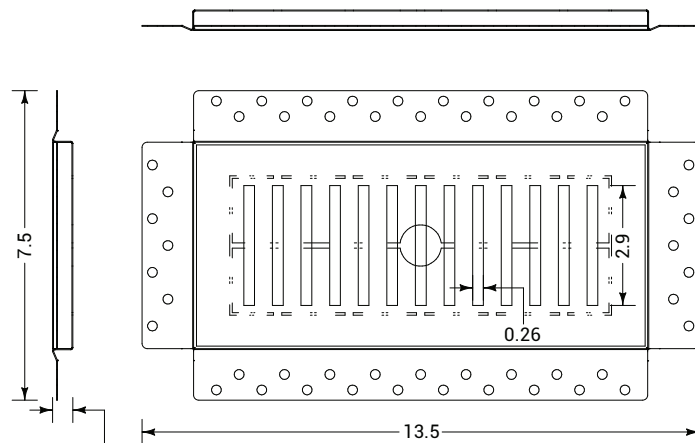



Material Information:

Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
Density - 0.95 g/cm
Water Content - 12%
Chloride Ion Content - 0%
Formaldehyde Release - 0%
Asbestos Content - 0%
Fire resistance - Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
Water Absorption - 27%
Resistant Bending Strength - 8 MPa
Impact Resistance - 1.5 J/m
Nail-Withdrawal strength - 16 N/mm
Water Permeability - No water vapour after 24 hour's test
Refractoriness (Pyrometric cone Test) - 4H
pH Value - 6.7(8.0)
Thermal conductivity - 0.2 W/(mK)
Moisture Movement - 0.25 %
Heat Shrinkage Rate - 0.05
Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com