



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

The KAFA is available in a variety of panels recessed 1/8" for resilient tile, smooth, abrasive coated and embossed diamond pattern. Frames are easy to install and are sealed with a rubber cork strip.

SPECIFICATION

CONSTRUCTION:

- Panels shall be 1/4" 6061-T651 aluminum with the following options: recessed 1/8", flush smooth plate, flush-diamond plate.

- Frame shall be 6063-TS extruded aluminum with die cast corner connectors and shall be installed with rubber cork strip seal.

- Panel shall be secured with 10-24 x 3/4 stainless steel FHMS screws.

SKU: **KAFA R18**

RECESSED 1/8" SMOOTH ALUM. FLOOR ACCESS PANEL





DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE W x H (IN.)	B PANEL SIZE (IN.)	C FRAME SIZE H X W (IN.)	SHIP WT. LBS
12 x 12	13 1/2 x 13 1/2	14 x 14	11.0
18 x 18	16 1/2 x 19 1/2	20 x 20	19.0
24 x 24	25 1/2 x 25 1/2	26 x 26	29.0
30 x 30	31 1/2 x 31 1/2	32 x 32	53.0
36 x 36	37 1/2 x 37 1/2	38 x 38	75.0

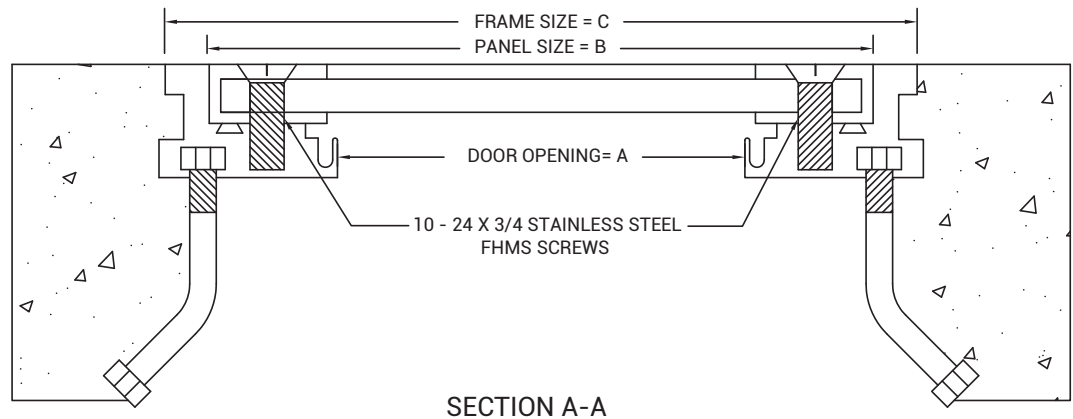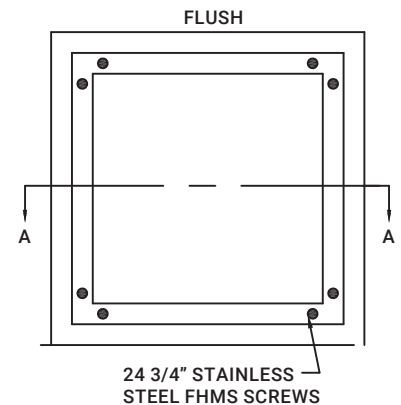

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
 Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
 1-888-457-1275
 FAX:
 1-888-626-2907



PO BOX 66738 #76520,
 SAINT LOUIS, MO
 63166-6738
 USA



WEBSITE:
www.AccessDoorsAndPanels.com
 E-MAIL:
info@AccessDoorsAndPanels.com