



NON-INSULATED FIRE RATED ACCESS DOOR WITH DRYWALL BEAD

Model KRP-450FR

For Walls Only



AccessDoorsAnd Panels
 Phone: 1-800-609-2917
 Fax: 1-888-626-2907
 Address: PO Box 66738 #76520,
 Saint Louis, IVD 63166-6738
 Website: www.AccessDoorsAndPanels.com

DATE

SPECIFICATIONS

GENERAL SCOPE:

Classified access frame and fire door assembly 1 1/2 hour "B" Label Underwriters Laboratories File # A-10806.

Warnock Hersey File # U51466.

CONSTRUCTION:



1. Frame shall be 16 gauge steel, 1" wide, surrounded by galvanized drywall bead.
2. Door shall be 16 gauge steel, and shall open to 175°, be self-latching with automatic closer and interior latch release.
3. Hinge shall be continuous piano hinge.
4. Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.
5. Finish shall have a prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel doors shall have #4 satin finish.

STANDARD SIZES

DOOR SIZE H X W (IN.)	WALL OPENING (IN.)	NUMBER OF LATCHES	SHIP WT. (LBS.)
8 x 8	8 3/8 x 8 3/8	1	4.3
12 x 12	12 3/8 x 12 3/8	1	7.2
14 x 14	14 3/8 x 14 3/8	1	8.3
16 x 16	16 3/8 x 16 3/8	1	9.9
18 x 18	18 3/8 x 18 3/8	1	11.7
24 x 24	24 3/8 x 24 3/8	1	17.4
30 x 22	30 3/8 x 22 3/8	1	19.1
30 x 30	30 3/8 x 30 3/8	1	23.9
36 x 24	36 3/8 x 24 3/8	2	24.1
36 x 36	36 3/8 x 36 3/8	2	33.5

PROJECT DATA					
Project Name:					
Architect:					
Contractor:					
Agent/Customer Name:					
Tagging Instructions:					
Special Instructions:					

PROJECT SCHEDULE					
Qty.	H	W	No. of Latches	Finish	Remarks

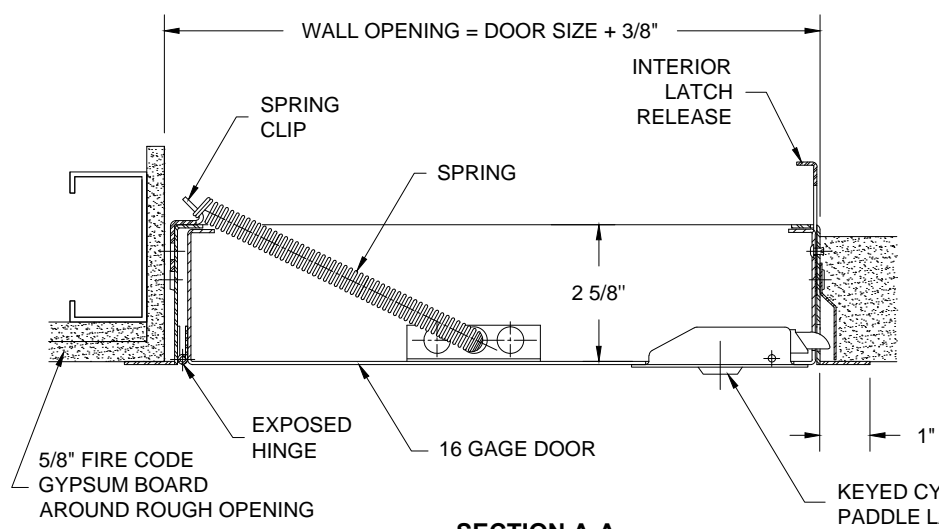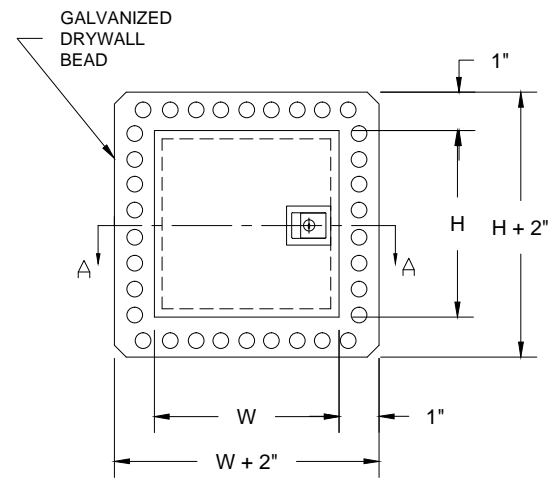

Made with Union Labor