



SUBMITTAL/TECHNICAL DATA SHEET

www.AccessDoorsAndPanels.com

APPLICATION

Aluminum wall mounted ladders are ideal to be used with any roof hatch. Ladder conforms to OSHA Standards 29CFR-1910.27. For additional support this ladder can also be mounted to the floor using the optional floor bracket.

FEATURES

- 15/16" square extruded aluminum climbing rungs spaced on 12" centers
- Loading: 300 LBS at midspan
- 3/8" x 2 1/2" Aluminum Side Members
- 7" Stand-off brackets
- Mill Finish

SPECIFICATIONS

- Aluminum Wall Mounted Ladder
- 15/16" square extruded aluminum climbing rungs spaced on 12" centers
- Loading: 300 LBS at midspan
- 3/8" x 2 1/2" Aluminum Side Members
- 7" Stand-off brackets
- Mill Finish

SKU: **LAD-AL**

ALUMINUM WALL MOUNTED LADDER




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

AVAILABLE SIZE CHART

FEET	INCHES
6ft	96"
8ft	114"
10ft	132"
12ft	150"
14ft	168"

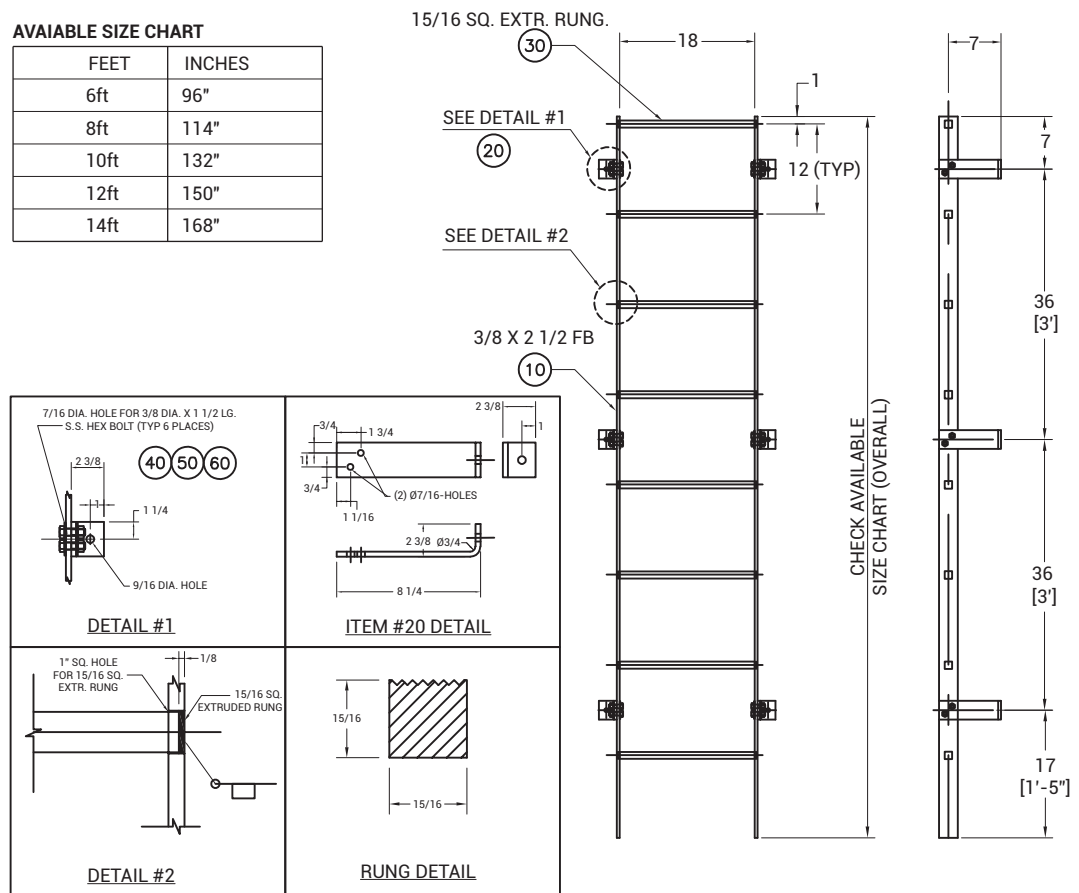

Proprietary property of Acudor Products, Inc., sold and distributed with proper authorization

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com