

APPLICATION

The LWP model is an insulated attic ladder made of pine wood. It allows access to otherwise unusable attic spaces without the hassle and clutter of an extension ladder. Each unit is equipped with a handrail which assists in climbing up and down the ladder.

SPECIFICATIONS


HATCH:
 Insulated, Sandwich type, Beige
 Thickness: 1 3/8"
 Thermal insulation thickness: 1 1/8"
 Hatch equipped with a lock

FRAME:
 Pinewood
 Height: 5 1/2"
 Gasket: 1 pcs

LADDER:
 Pinewood
 Ladder width: 15"
 Stringer height: 31 1/8" distance
 Between steps: 9 3/8"

STEPS:
 Made of pinewood, equipped with anti-slip profile
 Step width: 3 1/8"
 Thickness: 7/8"
 Length: 13 1/4"

STANDARD ACCESSORIES:
 Handrail in red colour
 Control rod for opening the hatch.

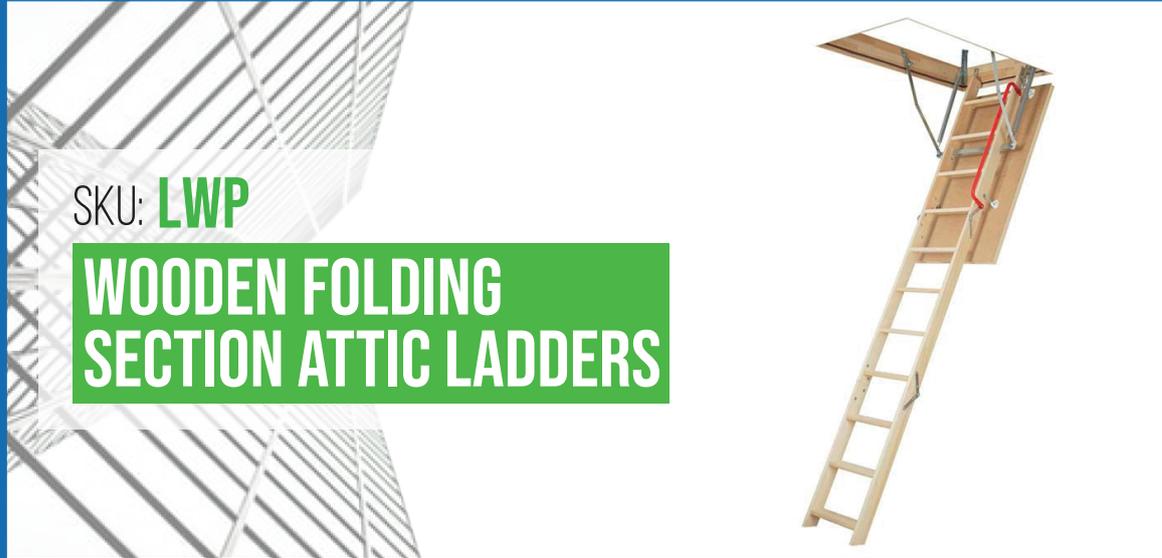

SKU: **LWP**

WOODEN FOLDING SECTION ATTIC LADDERS

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

DIMENSIONS:

Rough Opening	Room Height
22.5" x 47"	7'5" - 8'11"
25" x 47"	
22.5" x 54"	7'11 1/2" - 10'1"
25" x 54"	
30" x 54"	
22.5" x 54"	8'8 1/2" - 10'8"
25" x 54"	
30" x 54"	

TECHNICAL PARAMETERS:

Maximum loading	350 lbs
Heat transfer coefficient	R-value: 8.9

COMPATIBLE ACCESSORIES:

Plastic ends LXS	Available for all sizes
Metal handrail LXH	While ordering handrail please provide attic ladder type. Handrail can be mounted on the left or right side of ladder.
Ladder Balustrade LXB-U	The balustrade is available in one standard size 30"x54" for all attic ladders.
Wooden trim LXL-W	The trims are available in one size 30"x54" for smaller sizes have to be cut.
PCV trim LXL-PVC	The trims are available in one size 30"x54" for smaller sizes have to be cut.
Box extension LXN	The standard box height is 4". While ordering the LXN please provide ladder type and size.
Upper hatch LXW	The height of the upper hatch box is 7 3/4".
Installation brackets L XK	Maximum ceiling 13 3/4"

For more details see the second page

ASSEMBLY INFORMATION

The LWP Attic Ladder is delivered to the customer fully assembled and does not require any pre-installation work. New design of the loft ladder (hatch fastened by means of special the so-called "clicks") allows for easy and quick installation without the need for entering the attic. The length of the last segment should be cut on-site to suit to existing ceiling height. Installation of the product must be carried out in accordance with the included fitting instructions.

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
 1-888-457-1275
 FAX:
 1-888-626-2907



PO BOX 66738 #76520,
 SAINT LOUIS, MO
 63166-6738
 USA



WEBSITE:
www.AccessDoorsAndPanels.com
 E-MAIL:
info@AccessDoorsAndPanels.com

LWP

WOODEN FOLDING ATTIC LADDER

SIZE:									
LWP		22½ x 47	25 x 47	22½ x 54	25 x 54	30 x 54	22½ x 54	25 x 54	30 x 54
Manufacturer's part number		66801	66802	66803	66804	66809	66853	66854	66855
Ceiling height	H	7'5" - 8'11"			7'10" - 10'1"				
Rough opening	AxB	22½" x 47"	25" x 47"	22½" x 54"	25" x 54"	30" x 54"	22½" x 54"	25" x 54"	30" x 54"
Outside frame dimensions		22" x 46⅝"	24½" x 46⅝"	22" x 53½"	24½" x 53½"	29½" x 53½"	22" x 53½"	24½" x 53½"	29½" x 53½"
Internal frame dimensions		20½" x 44⅞"	23" x 44⅞"	20½" x 51¾"	23" x 51¾"	28" x 51¾"	20½" x 51¾"	23" x 51¾"	28" x 51¾"
Projection	R	64½"						75½"	
Landing space	C	57½"						65½"	
Folder ladder height	K				10¾"				
Board movement after opening	P				1¼"				
Frame height					5½"				

