

RAH Series



Roof Access Hatch

Roof Access Hatches are designed to provide convenient, cost saving access to the roofs of buildings, allowing for ladders and stair access to the roof from the interior of the building. Elmdor Roof Access Hatches are designed and engineered for durability and safety, with ease of installation. The Roof Access Hatches install easily over the roof opening and are secured from the base flange to the roof.

Curb construction shall be 14 gage galvanized steel with durable recoatable gray primer finish. It shall be 12" in height with a 3-3/8" wide mounting flange with mounting holes for roof attachment.

Cover is 14 gage galvanized steel with radius corners for safety and shall be fully welded at the corners for watertight construction.

Latching shall include interior handle, exterior handle and provisions for a padlock, both inside and out.

Hardware shall include an automatic, hold-open arm with vinyl grip and compression springs encased in telescopic tubes for smooth door operation.

Guide Specification

Provide Elmdor RAH series, Roof Access Hatch (specify model number and options). Roof hatch shall be fabricated from 14 gage galvanized steel on both curb and cover. Compression springs encased in zinc-plated telescopic tubes shall be provided for smooth operation of the cover. An automatic hold-open arm with vinyl grip will be furnished. Latching shall include both interior and exterior handles with provisions for a padlock both inside and out.



MODEL NUMBER AND OPTIONS SELECTION

Suffix Options

BASE MODEL NUMBER

- F FESCO


RAH Roof Access Hatch

STANDARD AVAILABLE SIZES

Special sizes available upon request.

| NOMINAL DOOR SIZE (W X H) | FRAME INNER DIMENSION (W X H) | FRAME OUTER DIMENSION (W X H) | ROOF OPENING DIMENSION (W X H) | WEIGHT |
|---------------------------|-------------------------------|-------------------------------|--------------------------------|----------|
| E-24" x 24" -RAH-W | 24" x 24" | 31" x 31" | 24" x 24" | 84 lbs. |
| E-24" x 30" -RAH-W | 24" x 30" | 31" x 37" | 24" x 30" | 103 lbs. |
| E-24" x 36" -RAH-W | 24" x 36" | 31" x 43" | 24" x 36" | 124 lbs. |
| E-30" x 30" -RAH-W | 30" x 30" | 37" x 37" | 30" x 30" | 129 lbs. |
| E-30" x 36" -RAH-W | 30" x 36" | 37" x 43" | 30" x 36" | 155 lbs. |
| * E-30" x 54" -RAH-W | 30" x 54" | 37" x 61" | 30" x 54" | 233 lbs. |
| * E-30" x 96" -RAH-W | 30" x 96" | 37" x 103" | 30" x 96" | 413 lbs. |
| E-36" x 36" -RAH-W | 36" x 36" | 43" x 43" | 36" x 36" | 185 lbs. |
| E-36" x 48" -RAH-W | 36" x 48" | 43" x 55" | 36" x 48" | 248 lbs. |
| E-48" x 48" -RAH-W | 48" x 48" | 55" x 55" | 48" x 48" | 330 lbs. |

* "W" or "H" greater than 48": The hinge will be positioned onto the larger side.

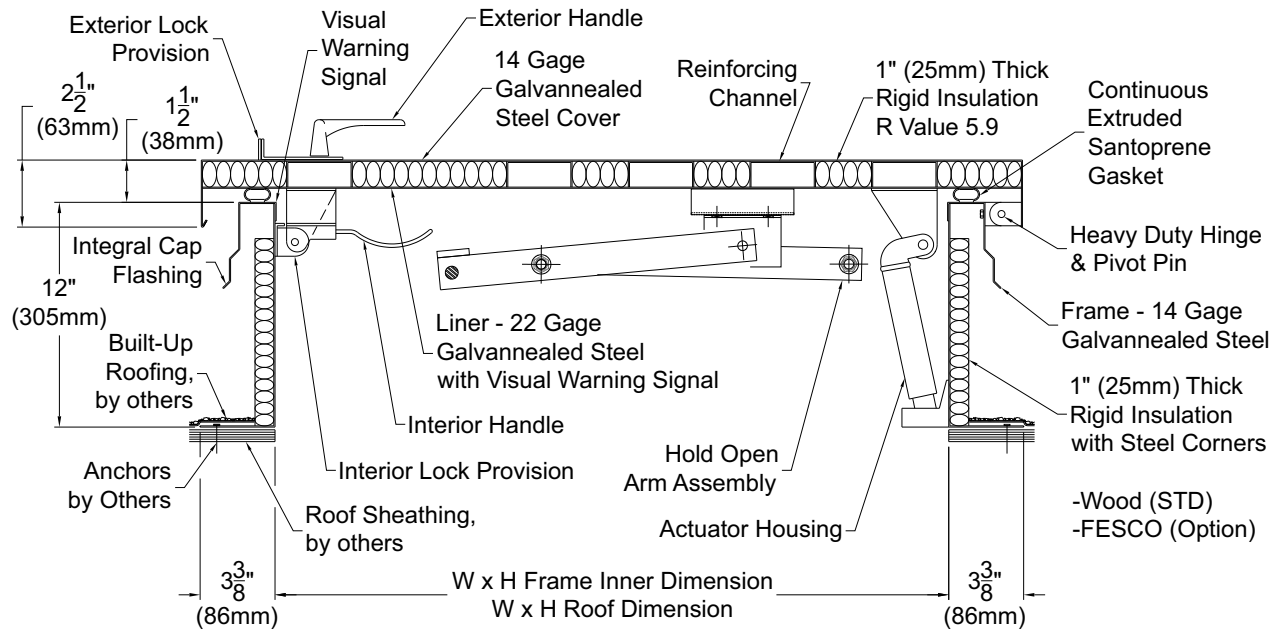

(REF. VIEW)

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

| | |
|--|----------------|
| Model Number & Options _____ | Quantity _____ |
| Company _____ | Date _____ |
| Contact _____ | Title _____ |
| Approval for Manufacturing/Signature _____ | |