

# SUBMITTAL: SM™ SURFACE-MOUNT ACCESS PANEL

**Model SM for Masonry, Tile and Wallboard** This all purpose frameless 16 gauge steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. The SM is primarily used for new installations or remodeling on masonry, tile, wood or other wall surfaces. Screws may be used to fasten the SM model securely in place through mounting holes in each corner.

## SPECIFICATIONS SM STEEL

**Frame:** 16 gauge steel with 1" wall flange. 1-5/8" depth.

**Door:** 16 gauge steel mounted with 90° continuous, concealed hinge.

**Finish:** White powder coat paint.

**Lock:** Flush screwdriver-operated steel cam "C".

**Sizes:** Minimum 8" x 8", maximum wall 36" x 36", maximum ceiling 24" x 24".

## SPECIFICATIONS SMS STAINLESS STEEL


**Frame:** 16 gauge stainless steel with 1" wall flange. 1-5/8" depth.

**Door:** 16 gauge stainless steel mounted with 90° continuous, concealed hinge.

**Finish:** 304 stainless steel.

**Lock:** Flush screwdriver-operated steel cam "C".

**Sizes:** Minimum 8" x 8", maximum wall 36" x 36", maximum ceiling 24" x 24".

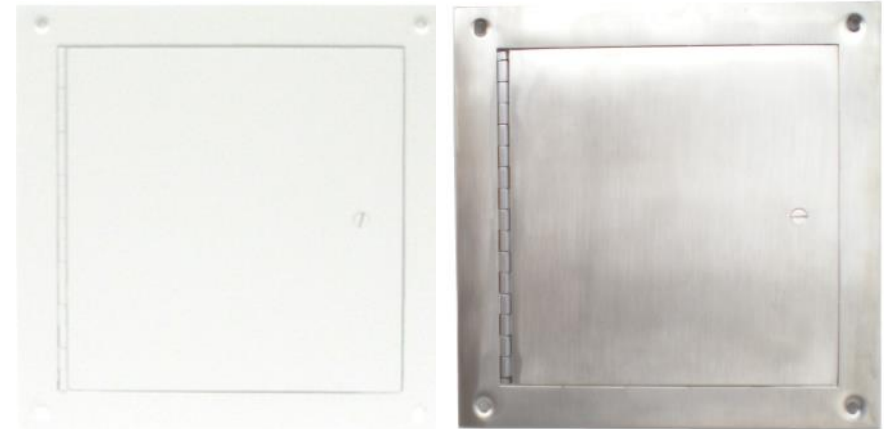

SM 0808

SMS 0808

### STEP 1: SELECT MODEL FROM CHART OR ENTER SIZE:

\_\_\_\_ For sizes not shown on chart. \_\_\_\_" W x \_\_\_\_" H (See size ranges above)

### STEP 2: SELECT MATERIAL:

\_\_\_\_ Standard 16 gauge steel - **SM**

\_\_\_\_ Stainless Steel - **SMS** (additional cost)

\_\_\_\_ Galvannealed Steel - **SMG** (additional cost)

### STEP 3: SELECT OPTIONS AT ADDITIONAL COST :

Optional Color Code: \_\_\_\_ - see page 2

(L) Cylinder lock installed

(C2) Torx head cam

(C3) Spanner head cam

(C4) Hex head cam

(C5) Knob cam






**Order Format Example: SM-1212C5W**


SM - Width Height Lock (C Std or Optional Lock/Latch Code) Color - Options

Standard Cam Latch



### LATCH AND LOCK OPTIONS

Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)
				

	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:

## SUBMITTAL: SM™ SURFACE-MOUNT ACCESS PANEL



Model SM—Surface Mount Access Panel							
QTY	Model Size Width x Height	Outside Frame Di- mensions		Wall Opening Dimensions		Shipping Weight	Latch(s)
		Width	Height	Width	Height		
	8 x 8	10"	10"	8"	8"	3 lbs	1
	12 x 12	14"	14"	12"	12"	7 lbs	1
	16 x 16	18"	18"	16"	16"	12 lbs	1
	24 x 24	26"	26"	24"	24"	27 lbs	4

**Optional Colors at Additional Cost - Samples Available**

B-Bronze	R-Red	BK-Black/FB Flat	S-Sand	AB-AMS Beige	SB-Flat Beige	G-Gray	SI - Silver
----------	-------	---------------------	--------	-----------------	---------------	--------	-------------