

# Exterior

## ACCESS DOOR

The Babcock-Davis Exterior Access Door provides efficient access from the exterior of your building without compromising security or weather resistance.

### FEATURES

**COMPATIBLE WITH BUILDING KEY** With the mortise lock prep option, you can match the mortise cylinder to that of your building's other access points.

**TEMPERATURE CONTROL** With 1.6 inch polyurethane insulation, the Babcock-Davis Exterior Door is constructed to protect your building from the harshest climates.

**AIR + WATER PENETRATION TEST** Independent lab testing for air leakage per ASTM E 283 and water leakage per ASTM E 331-00 assures the best protection against the elements.



### DETAILS

**DOOR** 24 gauge Steel

**FRAME** 0.080 inch 6063-T5 Extruded Aluminum

#### SIZE

- Min: 12 inches by 12 inches
- Max: 48 inches by 60 inches

**INSTALLATION** Ceiling or Wall

**FLANGE** Exposed or Plaster/Stucco Bead

**HINGE** Stainless Steel Continuous Piano

#### FINISH

- Door: Paint Grip Finish
- Frame: Mill


**INSULATION** 1.6 inch Polyurethane; R-11

**GASKETING** EPDM Self-Adhesive, Continuous

### FLANGES



1 inch Flange



Plaster/Stucco Bead

### LATCHES



Non-Locking Handle



Screwdriver Cam Latch



Locking Handle







Mortise Lock Prep

### ORDER GUIDE

BASE	FLANGE	LATCH	WIDTH	X	LENGTH	OPTIONS
<b>BX</b>				<b>X</b>		
	<b>T</b> 1 inch Flange <b>P</b> Plaster/Stucco bead	<b>A</b> Non-Locking Handle <b>C</b> Screwdriver Cam Latch <b>L</b> Locking Handle <b>M</b> Mortise Lock (1-1/8") Prep	<b>Standard Sizes (W x L)</b> 12" x 12"    20" x 30"    24" x 36" 16" x 16"    24" x 24"    36" x 36" 18" x 18"    24" x 30"			<b>A</b> Aluminum Door <b>C</b> Drip Cap <b>P</b> Padlock Hasp <b>S</b> Type 304 Stainless Steel

Rough opening is door size. Additional sizes available, call for more information.

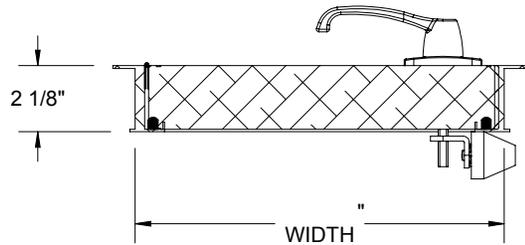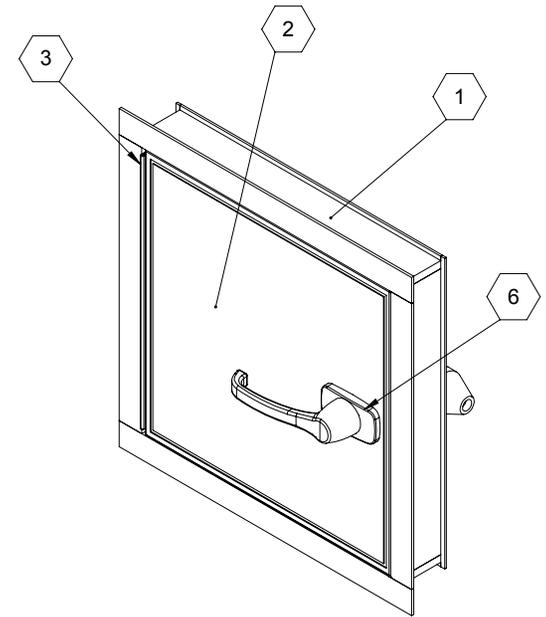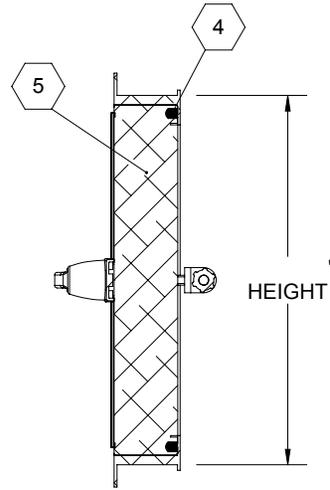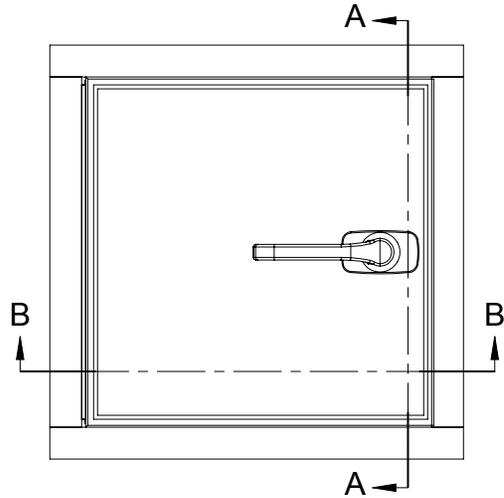

SECTION A-A

SECTION B-B







ROUGH OPENING: " X "  
 CLEAR OPENING: " X "  
 DEGREE OF OPENING: ° X °  
 # LATCHING POINTS:

NOTES:

- ① **FRAME:** 6063-T5 Ext Aluminum, Mill Finish
- ② **DOOR:**
- ③ **HINGE:**
- ④ **GASKET:** EPDM Self-adhesive, Continuous Four Sides
- ⑤ **INSULATION:** Foam Insulation, 2-1/4lb Density, 12 R-Value
- ⑥ **LATCH:** Non-Locking Handle

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

PROJECT:		
ARCHITECT:		
CONTRACTOR:		
QTY:		
PART#:		
<b>babcockdavis</b>	TITLE:	
9300 73rd Avenue North Brooklyn Park, MN 55428		
NAME DATE	SIZE DWG. NO.	REV
DRAWN	A	A
RELEASED	WEIGHT: VARIES	SHEET 1 OF 2

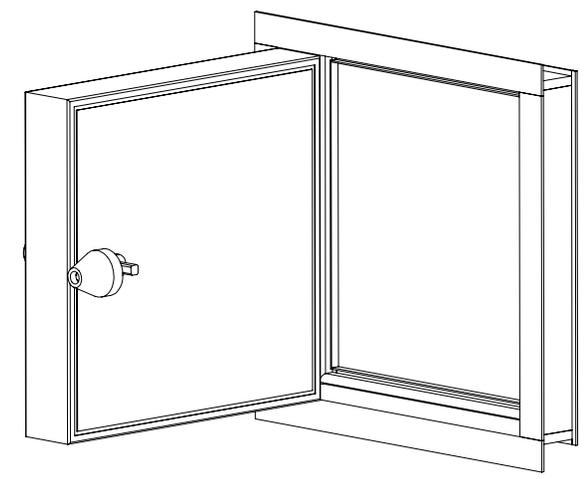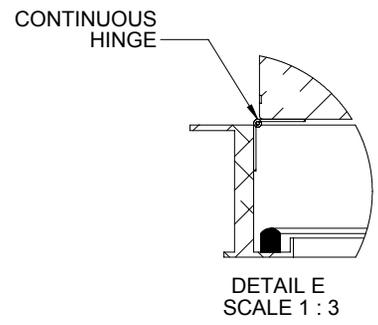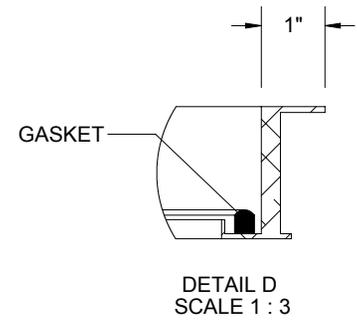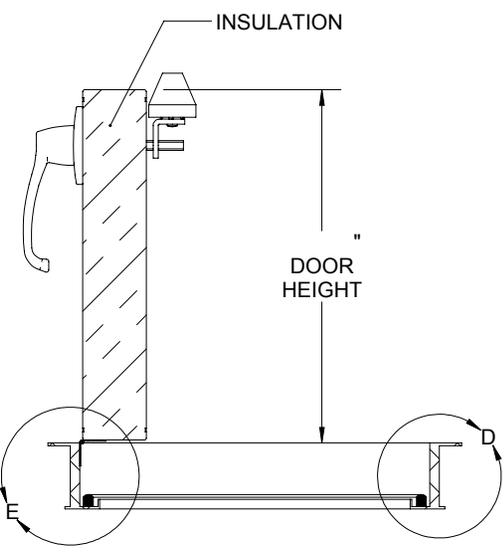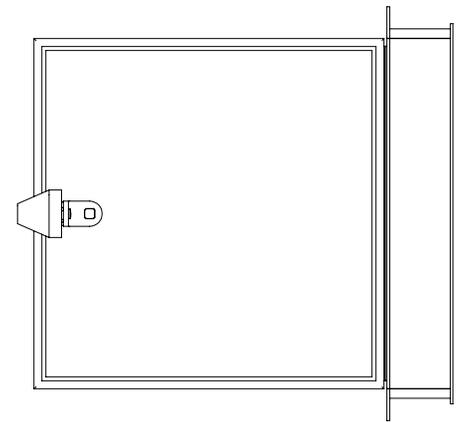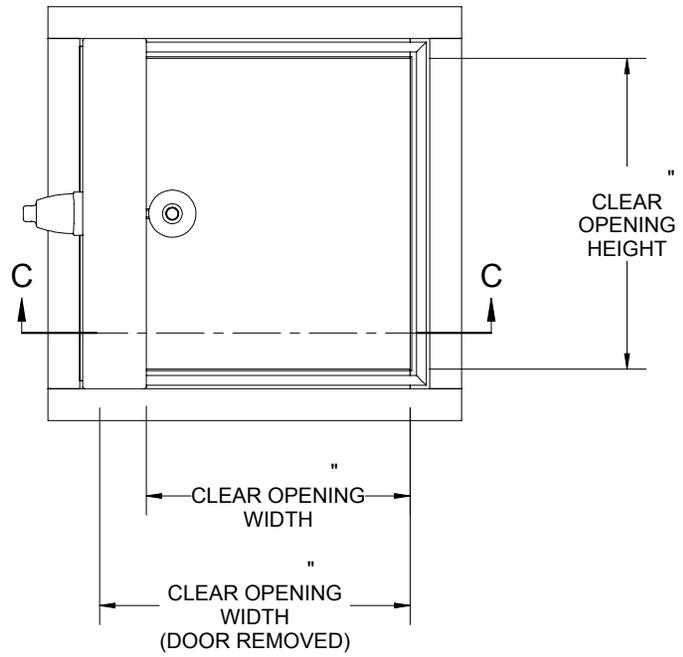

PART#:		TITLE:			
<b>babcockdavis</b>					
9300 73rd Avenue North Brooklyn Park, MN 55428					
NAME	DATE	SIZE	DWG. NO.	REV	
DRAWN		A		A	
RELEASED		WEIGHT: VARIES		SHEET 2 OF 2	

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.