

Lightweight

ACCESS DOOR

Babcock-Davis' non-rated insulated Lightweight Access Door offers a solution to larger openings in ceiling applications. The door is available in pre-finished, embossed, galvanized steel and aluminum door skins.

DETAILS

DOOR 26 gauge Steel, Embossed

FRAME .045 inch 6063-T5 Extruded Aluminum

SIZE

- Min: 12 inches by 12 inches
- Max: 18 inches by 72 inches, 24 inches by 60 inches or 48 inches by 48 inches

INSTALLATION Ceiling or Wall

FLANGE Rolled 1-5/16 inches Wide

HINGE Aluminum Continuous Piano

FINISH

- Door Skin: Steel, White Embossed
- Frame: Aluminum, Clear Anodized

INSULATION 3/4 inch Polystyrene, R-3.8



ORDER GUIDE

BASE	LATCH	WIDTH	X	LENGTH	OPTIONS
BLW			X		
	L Key Operated Cam Lock	Standard Sizes (W x L)			A Aluminum Panel Insert
	T Screwdriver Cam Latch	12" x 12"	24" x 24"	30" x 36"	G Gasketing
		18" x 18"	24" x 36"	48" x 48"	
		22" x 30"	24" x 48"	60" x 48"	
		22" x 36"	30" x 30"	72" x 48"	

Rough opening is door size + 1/4 inch minimum. Additional sizes available, call for more information.
*Double door construction.

Plastic

ACCESS DOOR

The Plastic Access Door provides an economical alternative to traditional materials and is ideal for light-duty applications. The removable panel is easily installed - no fasteners required.

DETAILS

DOOR 1/8 inch High Impact Styrene, Removable

FRAME Reversible 3/4 inch Flange

SIZE


- Min: 4 inches by 6 inches
- Max: 22 inches by 22 inches

INSTALLATION Ceiling or Wall

FLANGE Exposed


LATCH Snap Latch

FINISH White, Texturized

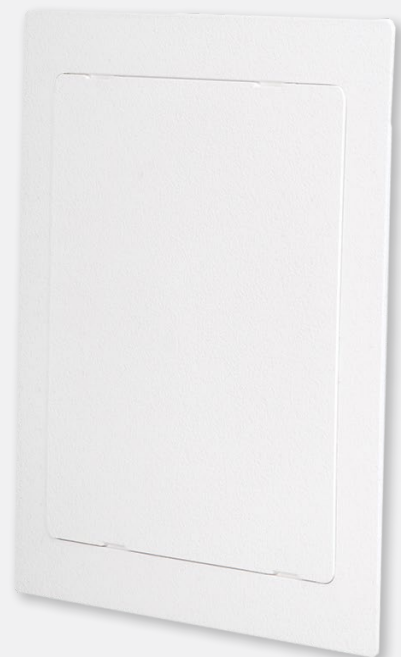

ORDER GUIDE

BASE	WIDTH	X	LENGTH
BPL		X	
	Standard Sizes (W x L)		
	4" x 6"	14" x 14"	
	6" x 9"	14 x 29	
	8" x 8"	22" x 22"	
	12" x 12"		

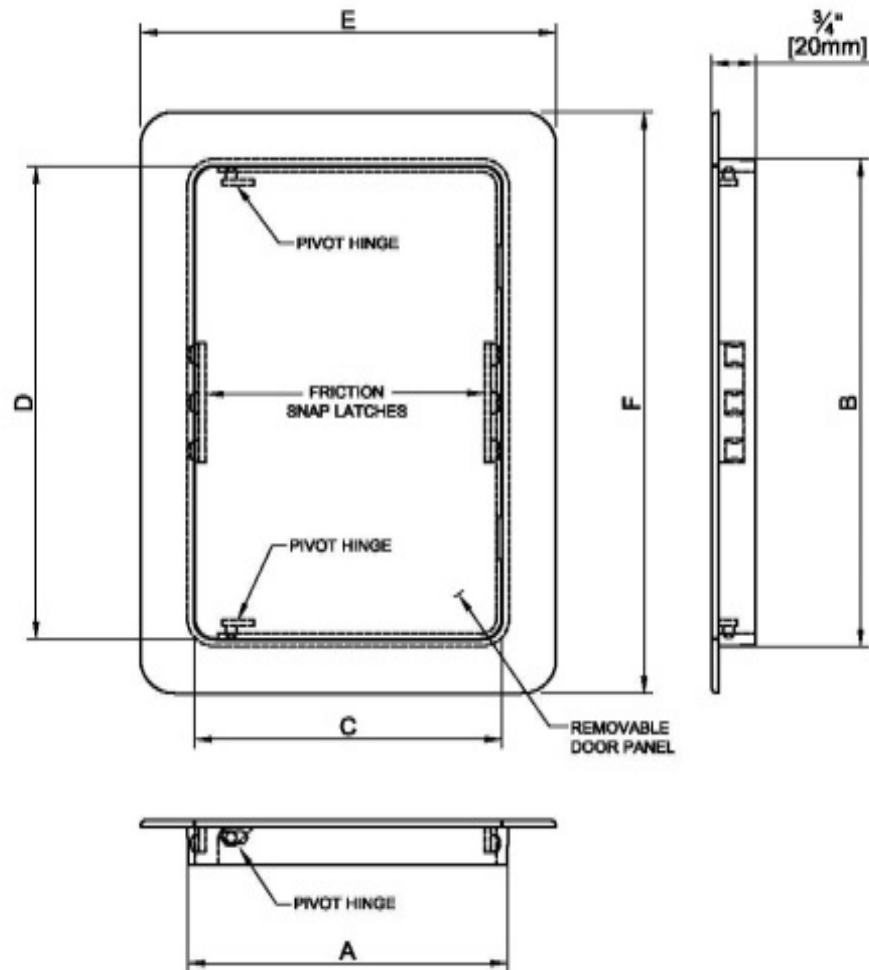

SPECIFICATIONS:

DOOR / DOOR FRAME:

- 3/8" [3mm] HIGH IMPACT STYRENE WITH U.V. STABILIZERS.
- DOOR PANEL IS BOTH HINGED AND REMOVABLE FOR UNOBSTRUCTED ACCESS.
- DOOR PANEL IS HELD CLOSED BY FRICTION SNAP LATCHES.
- FINISH IS WHITE WITH TEXTURED EXPOSED SURFACE READY FOR PAINTING OR WALLPAPERING.
- DOOR HAS A TAPERED FRAME AND IS EASILY INSTALLED BY PRESS FIT INTO AN OPENING CUT TO SIZE OR BY APPLYING CAULKING ADHESIVE TO THE BACK OF THE FRAME AND PRESSING INTO PLACE.

* Specifications subject to change without notice.

QTY	MODEL	STANDARD SIZE W x H		Rough Opening Size		Door Size		Overall Size	
		Inches	Metric (mm)	A	B	C	D	E	F
	PAD0406	4 x 6	102 x 152	4" (102)	6" (152)	3 3/4" (95)	5 3/4" (145)	5 1/8" (129)	7 1/8" (181)
	PAD0609	6 x 9	152 x 229	6" (152)	9" (229)	5 3/4" (145)	8 3/4" (222)	7 1/16" (195)	10 3/4" (273)
	PAD0808	8 x 8	203 x 203	8" (203)	8" (203)	7 3/4" (196)	7 3/4" (196)	9 3/4" (247)	9 3/4" (247)
	PAD1212	12 x 12	305 x 305	11 3/16" (300)	11 3/16" (300)	11 1/2" (292)	11 1/2" (292)	14 1/8" (357)	14 1/8" (357)
	PAD1414	14 x 14	356 x 356	14" (355)	14" (355)	13 1/16" (348)	13 1/16" (348)	16 3/4" (412)	16 3/4" (412)

Hinge Side

PROJECT:			
ARCHITECT:			
CONTRACTOR:			
QTY:			
PART#:			
 9300 73rd Avenue North Brooklyn Park, MN 55428		TITLE:	
NAME	DATE	SIZE	DWG. NO.
RELEASED		A	
			REV -
			SHEET 1