


GDT Series





Grease Duct Door

Grease Duct Doors are ideally suited for new installations or for remodeling interior of commercial and institutional kitchen ducts.

Door is fabricated of 16 gage galvanized steel. Door includes an integral fire rated gasket with two integral door handles for removing and installing.

Mounting Frame is constructed of 16 gage mild steel and includes $1/4-20 \times 1''$ long studs and wing nuts for door mounting. Extended studs are optionally available.

High Temperature Gasket is fire rated to 2300 F° and is bonded permanently to access door.

Guide Specification

Provide Elmdor $^{\rm s}$ GDT Series, Grease Duct Doors (Specify model number). Door shall be fabricated from 16 gage galvanized steel. Door includes an integral fire rated gasket with two integral door handles for removing and installing. Mounting frame is constructed of 16 gage mild steel and includes $1/4-20 \times 1''$ long studs and wing nuts for door mounting.









MODEL NUMBER AND OPTIONS SELECTION


BASE MODEL NUMBER


☐ GDT Grease Duct Door

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL SIZE	OVERALI	LSIZE	FRAME	OPENING	WING NUTS
in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	QTY#
7" (178) x 7" (178)	10" (254)	10" (254)	7" (178)	7" (178)	4
7" (178) x 12" (305)	10" (254)	15" (381)	7" (178)	12" (305)	6
7" (178) x 20" (508)	10" (254)	23" (584)	7" (178)	20" (508)	10
12" (305) x 12" (305)	15" (381)	15" (381)	12" (305)	12" (305)	8
12" (305) x 20" (508)	15" (381)	23" (584)	12" (305)	20" (508)	12
16" (406) x 20" (508)	19" (483)	23" (584)	16" (406)	20" (508)	12
20" (508) x 20" (508)	23" (584)	23" (584)	20" (508)	20" (508)	16

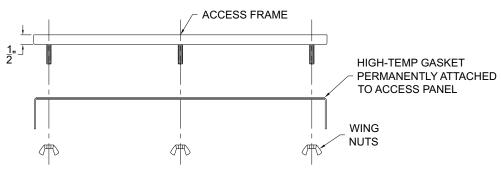

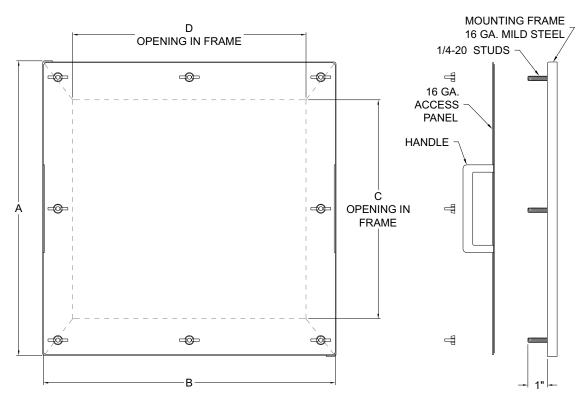

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING					
Model Number & Options	Quantity				
Company	Date				
Contact	Title				
Approval for Manufacturing/Signature					