

DESCRIPTIONS

Nystrom's Oversized Attic Access Door allows access into ceilings when over-sized or double door applications are required. The double leaf design allows objects to clear which may interfere with door openings.

FEATURES

- Fire-Rated
- Large Opening
- Custom Sizing

SPECIFICATIONS

DOOR: 18 gauge Steel

FRAME: 16 gauge Steel

SIZE:

Min: 36 inches by 60 inches
Max: 48 inches by 60 inches

FLANGE: 1 inch Exposed or Drywall Bead

HINGE: Flush Continuous Piano

INSTALLATION: Wall

FINISH: White Powder Coat

WARRANTY: 1 year

OPTIONS: Flanges, Latches, Materials, Gaskets, Anchors



SKU: **N FRD**

OVERSIZED ATTIC FIRE RATED ACCESS DOOR



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

Single leaf construction for walls and ceilings				
Rough Opening Size W x H		No. of Latches/Locks	Weight in kgs.	Weight in lbs.
Metric (mm)	Inches			
610 x 1219	24 x 48	2	24.94	55.00
762 x 762	30 x 30	1	19.50	43.00
762 x 914	30 x 36	2	23.13	51.00
762 x 1219	30 x 48	2	29.93	66.00
813 x 813	32 x 32	2	22.22	49.00
914 x 914	36 x 36	2	27.21	60.00
Single leaf construction for walls only				
914 x 1219	36 x 48	2	34.92	77.00
914 x 1524	36 x 60	2	43.99	97.00
1016 x 1016	40 x 40	2	32.65	72.00
1016 x 1219	40 x 48	2	38.10	84.00
1016 x 1524	40 x 60	2	47.62	105.00
1219 x 1219	48 x 48	2	44.45	98.00
1219 x 1524	48 x 60	2	55.33	122.00

Left side value is Hinge side

Net Opening
Width minus 77mm [3"]
Height minus 39mm [1 1/2"]

For detailed specifications see submittal sheet

OPTIONS:

- - Optional material - 304 stainless steel with a no. 4 polished finish on the exterior surface c/w continuous piano hinge. *
- - Continuous piano hinge. *
- - Masonry anchors attached. *
- - Allen key
- - Raised knurled knob.
- - Non-locking handle. *
- - 1 1/8" Mortise prep only. *
- - 1 1/8" mortise prep complete with mortise cylinder. *

* - Denotes Additional Cost.



CERTIFICATION
Warnock-Hersey listed for 2 hours

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA




WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



N FRD


OVERSIZED ATTIC FIRE-RATED ACCESS DOOR

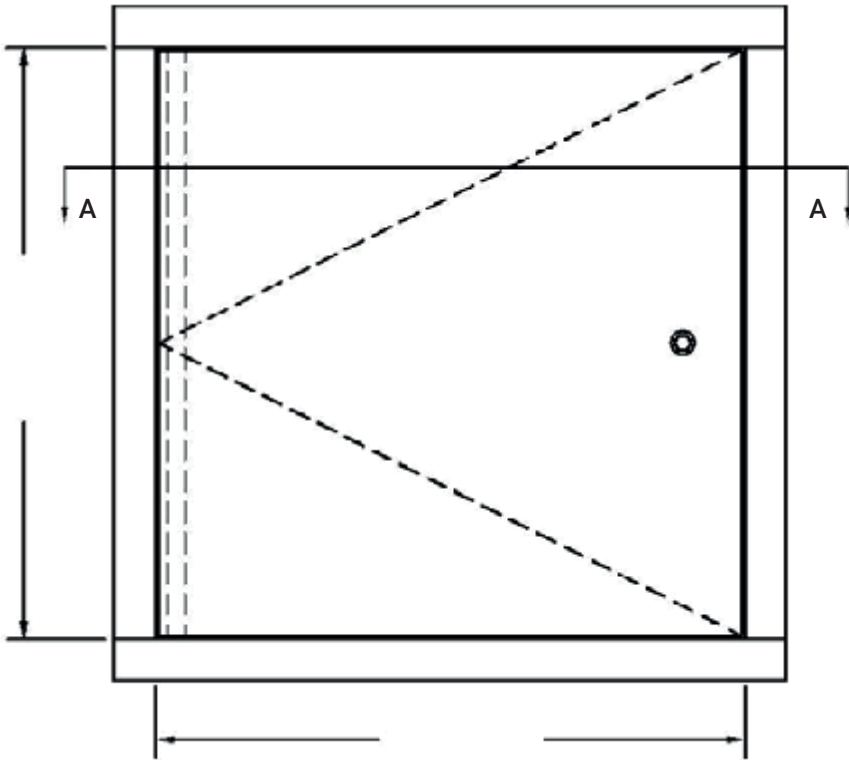

FRONT ELEVATION

STANDARD CONSTRUCTION:

- MATERIAL:** Satin finish galvanized (galvannealed) steel
- PANEL:** 1.31mm [18 ga].
- LINER:** 0.85mm [22ga].
- FRAME:** 1.61mm [16ga] Up to 262mm x 1219mm [30" x 48"]. Larger sizes: 1.99mm [14ga].
- FLANGE:** 22mm [7/8"] Exterior flange up to and including 914mm x 914mm [36" x 36"]. Larger sizes: 32mm [1 1/4"].
- HINGE:** Continuous rod hinge. Piano hinge standard on panels exceeding 1219mm [48"] in a wall position.
- LATCH:** 1/4 Allen key, with interior release.
- INSULATION:** 38mm [1 1/2"] High temperature.
- FINISH:** Rust inhibitive prime coat (Off-White).

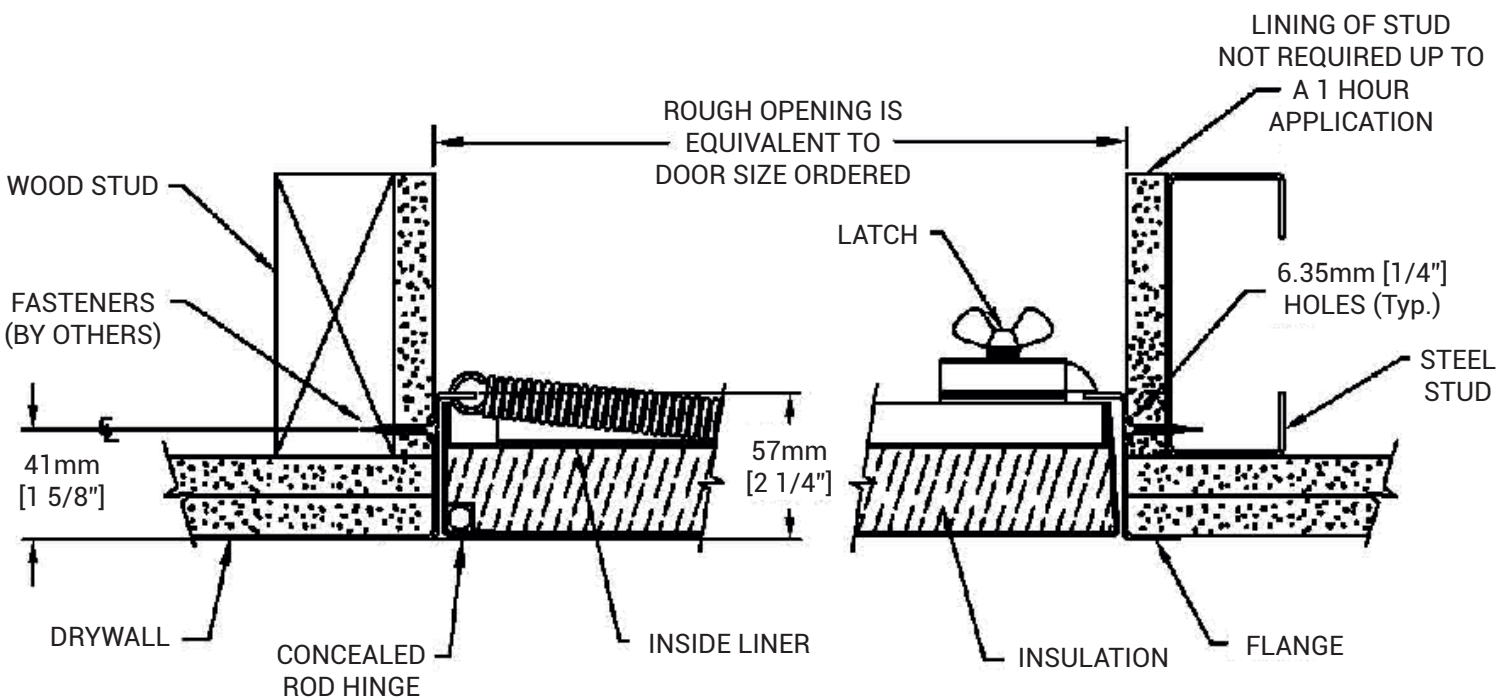

SECTION A-A