

SUBMITTAL/TECHNICAL DATA SHEET



ADVANTAGES

- MATERIAL:**
- U-LP : 14 gauge galvanized steel cover and 14 gauge galvanized steel curb with a 12 gauge galvanized steel curb cap
 - U-LPA : .10 Aluminum cover and .10 Aluminum curb with .125 Aluminum curb cap
 - U-LPAG : .10 Aluminum cover and 14 gauge galvanized steel curb with 12 gauge galvanized steel curb cap

- FINISH:**
- Galvanized Steel: Mill Finish
 - Aluminum: Mill Finish

COVER: High-strength composite construction with exterior cover and liner bonded to a 2" core of rigid foam-type insulation

CURB: 1 1/2" in height with 3 1/2" pre-drilled mounting flanges and counterflashing with 1" thick exterior fiberboard insulation

GASKET: Polyurethane Foam Gasket adhered to the entire perimeter of curb

HINGES: Steel Pintle Hinge

SPRINGS: Dampened Gas Springs to open against 10 psf snow or wind load at a safe controlled speed

LATCHES: Latch designed to open automatically with parting of single 165 degree fusible link or manually with interior and exterior pull release handles without disturbing the fusible link. Designed to withstand 90 psf wind uplift for class 90 roof decks.

HARDWARE: All hardware is zinc plated (stainless steel hardware optional)

LOAD CAPACITY: 50psf

OPERATION: Covers automatically spring open to approximately 90 degrees in the event of fire, being actuated by the parting of a single UL-listed 165 degree F fusible link, automatically locking in the fully opened position

- CERTIFICATIONS:**
- UL 793 Listed
 - UL 790 Certified

Heat & Smoke Vents Protect in the Event of Smoke & Fire: Opens instantly when UL listed fusible link is exposed to a temperature of 165 degrees to release noxious smoke and deadly gases out of the building.

SKU: **U LPAG**

ALUM. & GALV. HEAT AND SMOKE VENTS




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES AND PRODUCT NUMBERS:

DOOR SIZE	MATERIALS	MODEL	SHIPPING WEIGHT LBS.
4'0" x 4'0"	Alum. Cover & Galv. Curb	U-LPAG-4848	235
4'0" x 5'0"	Alum. Cover & Galv. Curb	U-LPAG-4860	295
4'0" x 6'0"	Alum. Cover & Galv. Curb	U-LPAG-4872	320
4'6" x 4'0"	Alum. Cover & Galv. Curb	U-LPAG-4884	370
4'6" x 5'0"	Alum. Cover & Galv. Curb	U-LPAG-4890	390
4'6" x 6'0"	Alum. Cover & Galv. Curb	U-LPAG-4896	415
5'0" x 5'0"	Alum. Cover & Galv. Curb	U-LPAG-6060	346
5'0" x 6'0"	Alum. Cover & Galv. Curb	U-LPAG-6072	375
5'0" x 7'0"	Alum. Cover & Galv. Curb	U-LPAG-6084	445
5'0" x 8'0"	Alum. Cover & Galv. Curb	U-LPAG-6096	495
5'0" x 9'0"	Alum. Cover & Galv. Curb	U-LPAG-60108	560
5'6" x 6'0"	Alum. Cover & Galv. Curb	U-LPAG-6672	420
5'6" x 7'0"	Alum. Cover & Galv. Curb	U-LPAG-6684	495
5'6" x 8'0"	Alum. Cover & Galv. Curb	U-LPAG-6696	550
5'6" x 9'0"	Alum. Cover & Galv. Curb	U-LPAG-66108	620
6'0" x 6'0"	Alum. Cover & Galv. Curb	U-LPAG-7272	460
6'0" x 7'0"	Alum. Cover & Galv. Curb	U-LPAG-7284	545
6'0" x 8'0"	Alum. Cover & Galv. Curb	U-LPAG-7296	605
6'0" x 9'0"	Alum. Cover & Galv. Curb	U-LPAG-72108	680

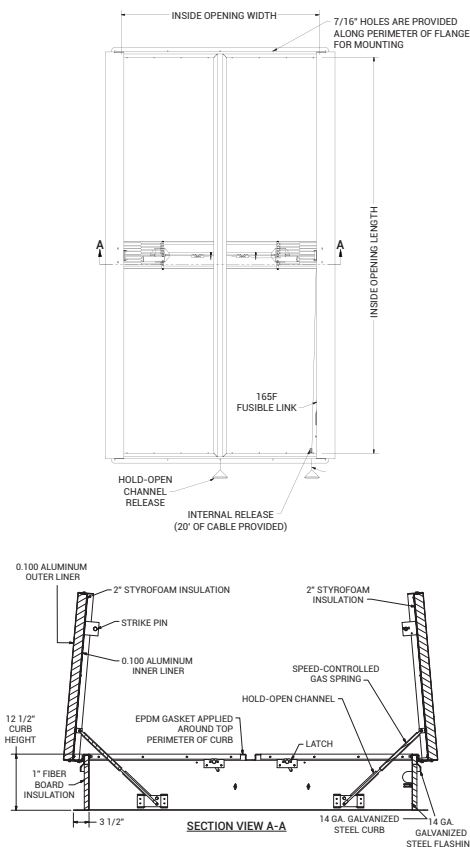

Check the Second Page for more Detailed Information

For a complete list of options visit www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@accessdoorsandpanels.com




ULPAG

BIG SMOKY UL VENTS

STANDARD MODEL TABLE:

MODEL	WIDTH, IN	LENGTH, IN	MODEL	WIDTH, IN	LENGTH, IN
ULPAG-4848	48	48	ULPAG-6672	66	72
ULPAG-4860	48	60	ULPAG-6684	66	84
ULPAG-4872	48	72	ULPAG-6696	66	96
ULPAG-4884	48	84	ULPAG-66108	66	108
ULPAG-4890	48	90	ULPAG-66120	66	120
ULPAG-4896	48	96	ULPAG-66132	66	132
ULPAG-6060	60	60	ULPAG-66144	66	144
ULPAG-6072	60	72	ULPAG-7272	72	72
ULPAG-6084	60	84	ULPAG-7284	72	84
ULPAG-6096	60	96	ULPAG-7296	72	96
ULPAG-60108	60	108	ULPAG-72108	72	108
ULPAG-60120	60	120	ULPAG-72120	72	120
ULPAG-60132	60	132	ULPAG-72132	72	132
ULPAG-60144	60	144	ULPAG-72144	72	144

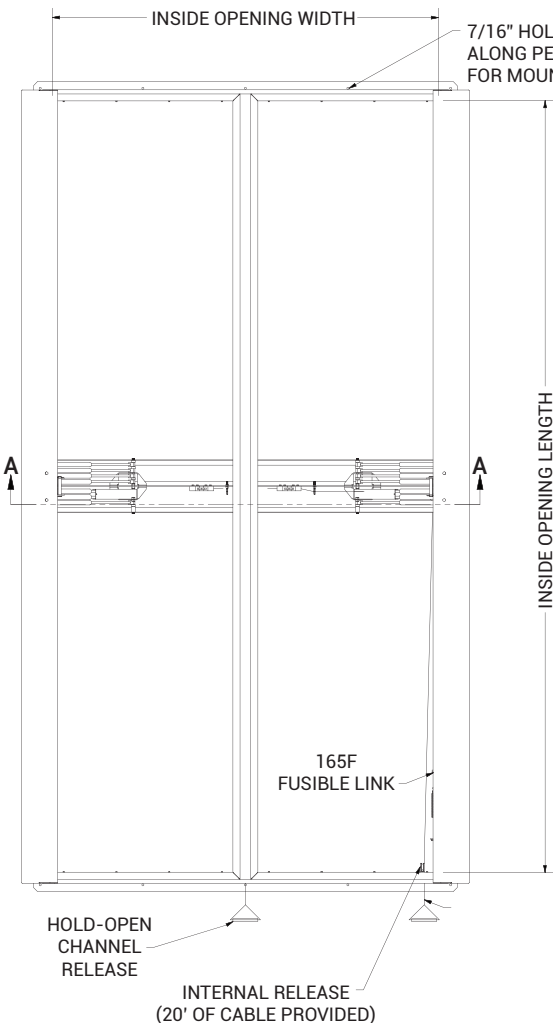

- NOTES:
1. UL 793 LISTED
 2. UL 790 CERTIFIED
 3. RATED FOR 10 PSF SNOW LOAD AND WIND LOAD 240 PSF UPLIST
 4. CURB WIDTHS X LENGTH BETWEEN THE STANDARD LISTED ARE CUSTOM
 5. NUMBER OF GAS SPRINGS VARIES ACROSS SIZES

