

SUBMITTAL/TECHNICAL DATA SHEET



DESCRIPTIONS

The Waldor access panel is designed to five access to concealed services within tiled walls. The access panel is manufactured from 1/32" (1mm) thick corrosion resistant stainless steel with patented concealed hinge.

OPTIONS

The doors can be fitted with either "push pull" concealed or security locks. Also available is an optional stainless steel show edge for both the door and frame.

SPECIFICATIONS

DOOR:
14 gauge cold rolled steel

FRAME:
16 gauge cold rolled steel

HINGE:
Concealed pin


FINISH:
Gray powder paint

CERTIFICATION:
UL listed B label for 1-1/2 hrs

ADVANTAGES

- Keyed Alike option
- Fast delivery
- Economical solution
- Quick and easy installation
- Superior engineering and innovative design

For a complete list of options visit www.AccessDoorsAndPanels.com

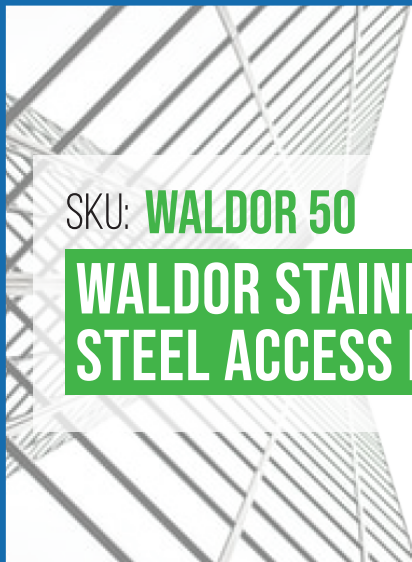


SKU: **WALDOR 50**

WALDOR STAINLESS STEEL ACCESS DOOR



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

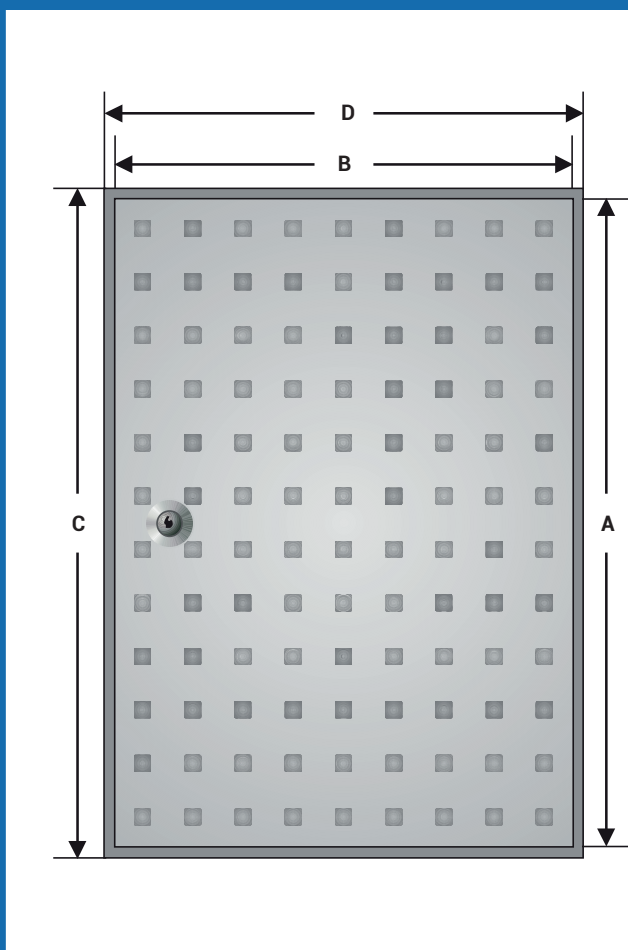

DIMENSIONS:

All panels are manufactured to order in 1/32" (1mm) increments between the minimum and maximum sizes listed.

Minimum door size 11 13/16" H x 11 13/16" W (300mm H x 300mm W)

Maximum door size 35 7/16" H x 23 5/8" W (900mm H x 600mm W).

Cut out size = door size + 9/32" (7mm)

Clear opening = door size - 15/16" (24mm) H and - 4" (100mm) W.

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@accessdoorsandpanels.com