

# SUBMITTAL/TECHNICAL DATA SHEET



## DESCRIPTIONS

Milcor Heat & Smoke Vents Protect in the Event of Smoke & Fire: Opens instantly when UL listed fusible link is exposed to a temperature of 165 degrees to release noxious smoke and deadly gases out of the building.

## SPECIFICATIONS

### MATERIAL:

- F: 1/4" Aluminum Tread Plate and extruded aluminum frame
- T & Z: 1/8" Aluminum Plate and extruded aluminum frame

FINISHES: Mill Finish

### COVER:

- F: Diamond patterned safety tread plate designed to support minimum of 200 psf live load.
- T: 1/8" Recessed for floor tile to support minimum of 200 psf live load
- Z: 11/16" Recessed for terrazzo to support minimum of 200 psf live load

### FRAME:

- F & T: 1/8" Extruded aluminum frame w/ integral masonry anchors
- Z: 1/8" fully welded and mitered aluminum frame w/ welded masonry anchors

GASKET: 1/16" Neoprene gasket adhered to frame ledge


LATCH: None

HANDLE: Lift Ring for easy access

LIFT ASSISTANCE: None

HARDWARE: Stainless steel


For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

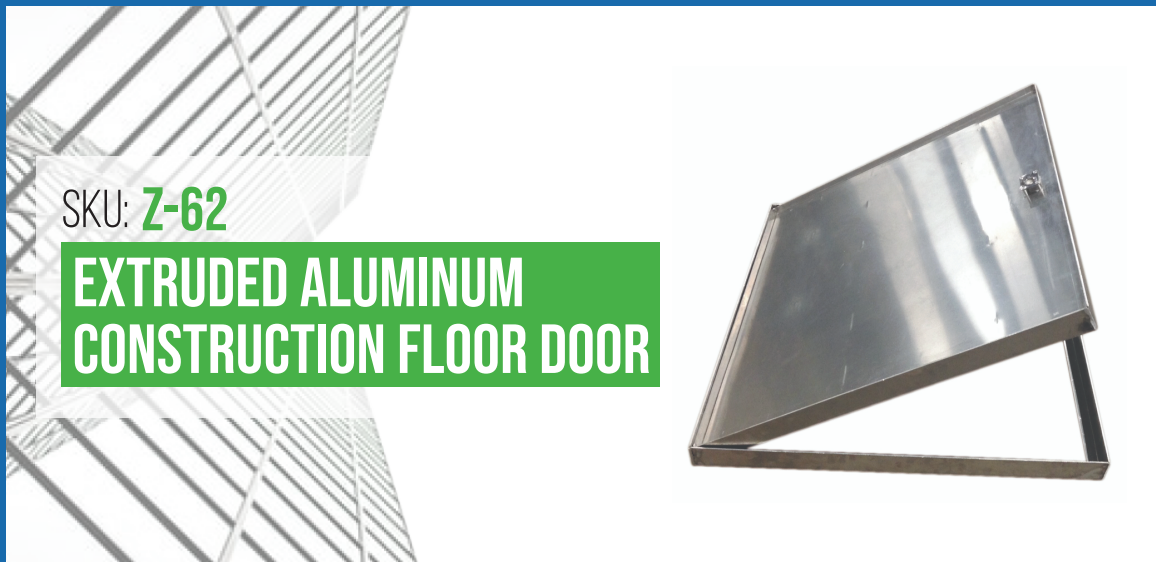

SKU: **Z-62**

## EXTRUDED ALUMINUM CONSTRUCTION FLOOR DOOR

### ■ DIMENSIONS AND APPEARANCE >> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

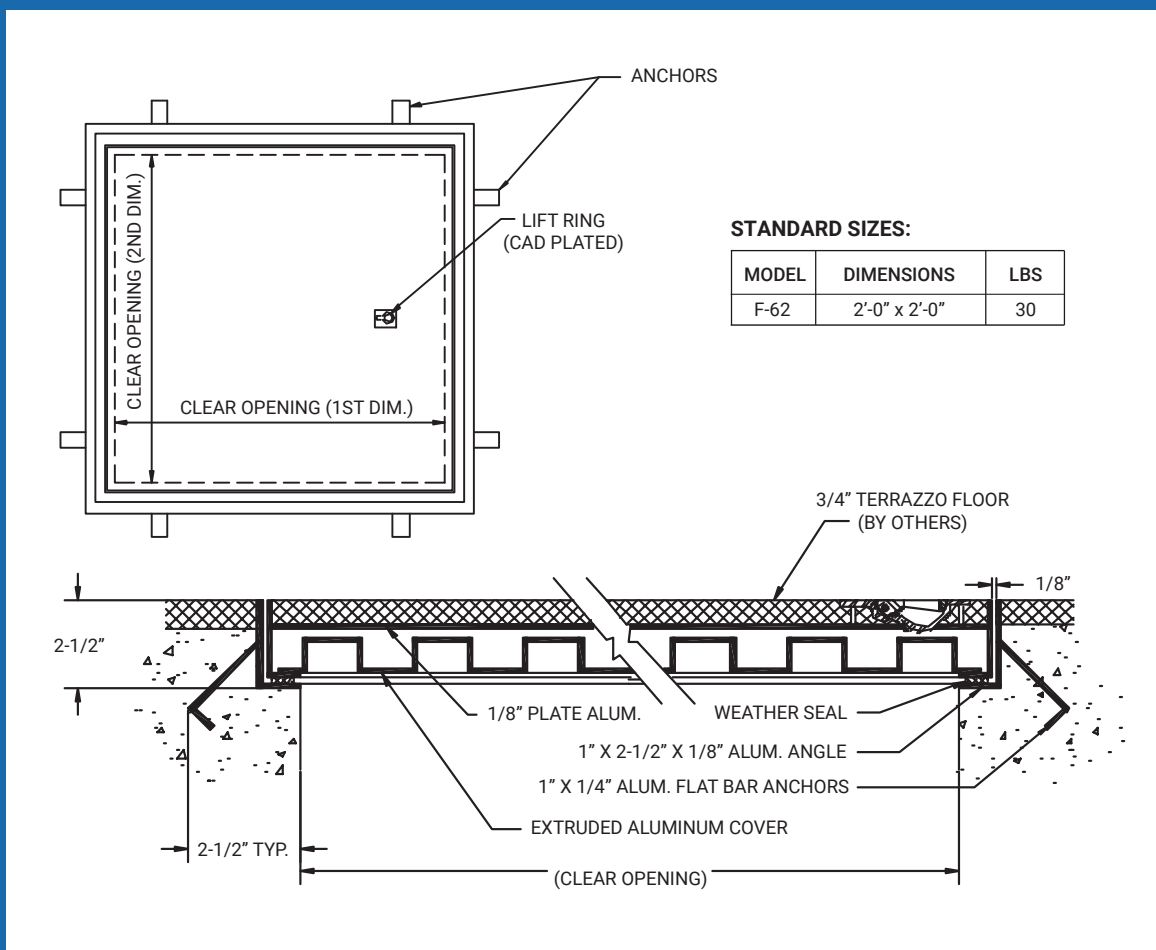

#### STANDARD SIZES:

MODEL	DIMENSIONS	LBS
F-62	2'-0" x 2'-0"	30

### ■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@accessdoorsandpanels.com](mailto:info@accessdoorsandpanels.com)