

DESCRIPTION

Stealth Residential Glass Fiber
Reinforced Gypsum (GFRG) panels
(30in x 30in Access Opening) include
a rubber gasket around it's perimeter
to ensure the door meets residential
code and remains moisture resistant.
Panels will not shrink, rust, or crack,
and will accept any finish to ensure it
blends seamlessly with the home's
aesthetic style. Install during new
construction, or easily retrofit into a
drywall ceiling.

For a complete list of options visit www.AccessDoorsAndPanels.com

SUBMITTAL/TECHNICAL DATA SHEET





■ DIMENSIONS AND APPEARANCE

STANDARD SIZES:


PART CODE	CORNER TYPE	ACCESS OPENING	ROUGH OPENING *	APPROX. WEIGHT
AP-DR2230G	RADIUS	21.5in x 30in (NEW DIMENSIONS)	24IN X 36IN (NEW DIMENSIONS)	16lbs
AP-DR3030G	RADIUS	30in x 30in	36in x 36in	20lbs

*Rough Opening is from Outside of Frame to Outside of Frame

For detailed specifications see submittal sheet







■ PROJECT DATA

Custom Sizes Available - Fast!


PROJECT NAME :	QTY	W	Н	OPTIONS	
ARCHITECT:					
DEALER:					
CONTRACTOR:					
LOCATION:	SPECIAL INSTRUCTIONS:				
DATE:					
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL : (signature or stamp)				






AP-DR2230G

STEALTH RESIDENTIAL PANEL WITH GASKET, 22IN X 30IN

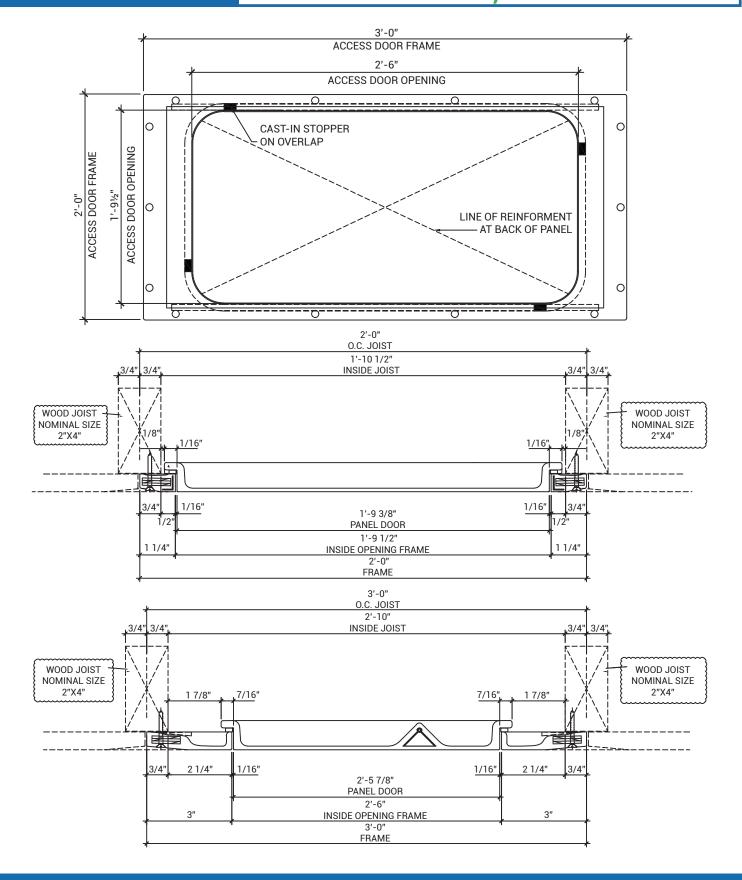

AP-DR3030G

STEALTH RESIDENTIAL PANEL WITH GASKET, 30IN X 30IN

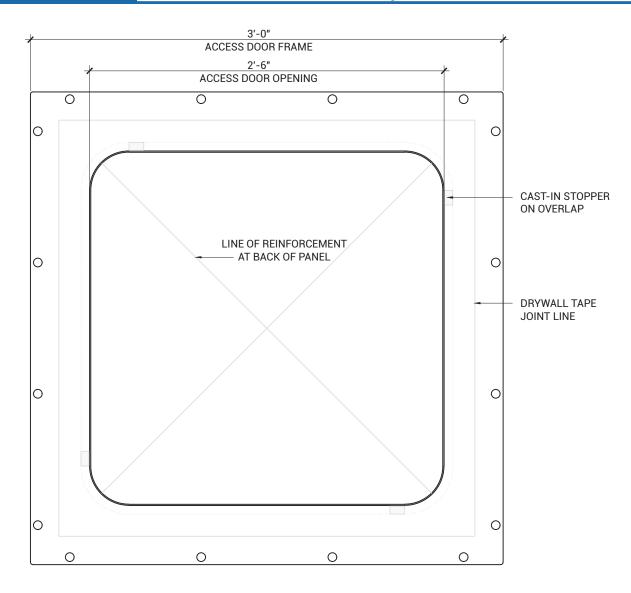

FOR MORE INFORMATION REFER TO STEALTH SHOP DRAWING AP-DR3030G

