



DETAIL & SUBMITTAL SHEET



FRONT ELEVATION

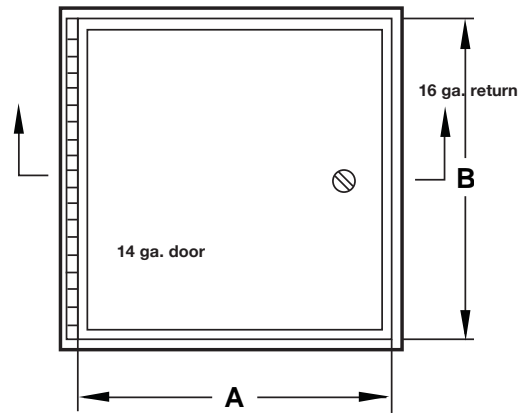

SECTION DETAIL

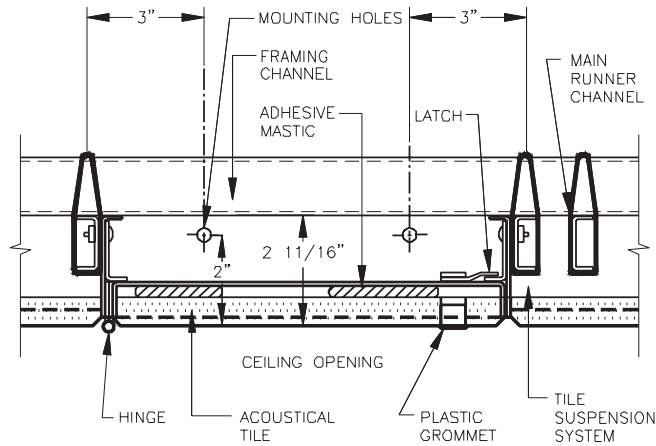

SPECIFICATIONS:

Door: 16. ga. steel. Door is recessed to accommodate up to 5/8" thick acoustical tile

Frame: 16 ga. steel

Hinge: Continuous piano hinge opens 180°

Latches: Flush, stainless steel cam latch

Finish: White baked enamel coat

OPTIONS (at additional cost)

- Key operated medium barrel cylinder lock
- Gasketing on all 4 sides [Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized]
- Special sizes available
- _____

✓	Item No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
	AT 600	12 x 12	12 1/4 x 12 1/4	1	8
	AT 600	12 x 24	12 1/4 x 24 1/4	1	15
	AT 600	18 x 18	18 1/4 x 18 1/4	3	15
	AT 600	24 x 24	24 1/4 x 24 1/4	3	28
	AT 600	24 x 36 *	24 1/4 x 24 1/4	3	32

A precision door that provides a virtually concealed installation, 5/8" gypsum board, keeping acoustical surfaces intact while contributing to sound control with STC rating and better appearance.

[Click here to Online Product Page and Pricing](#)

AccessDoorsAndPanels

Phone: 1-800-609-2917 **Email:** info@accessdoorsandpanels.com
Fax: 1-888-626-2907 **Website:** www.AccessDoorsAndPanels.com
 PO Box 66738 #76520, Saint Louis, MO 63166 6738



www.AccessDoorsAndPanels.com