



TECHNICAL DATA SHEET

www.AccessDoorsAndPanels.com

DESCRIPTIONS

Inverted "Y" Blades Recommended for Schools, Class "A" and Institutional Buildings.

SPECIFICATIONS

MATERIAL: 18 gauge CRS frame and 20 gauge blades. Min size 6" W x 4" H, Max 48" W x 80" H. Multiple sections can be combined for larger sizes.

CONSTRUCTION: Louvers: Inverted "Y" blades with 1" blade spacing are attached by interlocking construction to the 1" deep, welded frame. Non-vision.

800A1 Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.

DOOR: ____ 1-3/4" Any Style.
____ 1 3/8"-1 3/4" - 800C, 800A, 800 (Core).

Door cutout = order size.

FASTENERS: Phillips head screws #8 x 3/4" to match finish.

FREE FLOW AREA: 50% free area.


SKU: **BA-DLSY-AB**

INVERTED Y-BLADE LOUVER



DIMENSIONS AND APPEARANCE

[>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

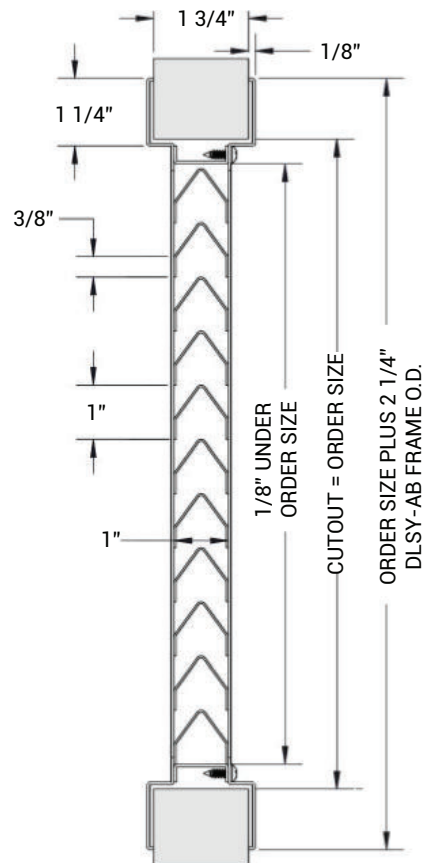

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes & Options Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com