

APPLICATION

Designed for interior and exterior applications that require an access

opening that will blend in with the surrounding floor material

FEATURES

- Recessed 1" to accommodate ceramic tile/concrete
- To keep the floor material from cracking or chipping within the door panel, the security screws are located in the flange of the mounting frame

SPECIFICATIONS

MATERIAL: Aluminum

DOOR: 1/4" smooth aluminum plate reinforced for live loads of 150 pounds/sq.ft. / recessed 1" for ceramic tile/concrete

FRAME: 1-1/2" x 1-1/4" aluminum angle with mounting holes in top flange

STANDARD LATCH: Door panel is secured to frame with 1/4" x 1" flat head screws

FINISH: Mill finish

For a complete list of options visit www.AccessDoorsAndPanels.com

Scan or (m) Click

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-RRFD-T1 FLOOR DOOR NON HINGED PANEL RECESSED 1**"

FOR CERAMIC TILE/CONCRETE



www.AccessDoorsAndPanels.com

■ DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


STANDARD SIZES:

DOOR SIZE W x H INCHES (MM)	WEIGHT LBS KG				
8 x 8 (203 x 203)	6 2.7				
12 x 12 (305 x 305)	9 4.1				
18 x 18 (457 x 457)	18 8.2				
24 x 24 (610 x 610)	36 16.3				


For detailed specifications see submittal sheet


MANUFACTURED BY ACUDOR

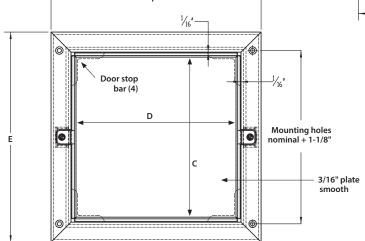

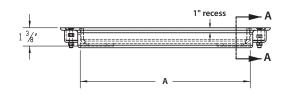

SECTION A-A





NOTES:

- MATERIAL: ALUMINUM
- LOADING: 150 LBS. PER SQ. FT.
- 316 STAINLESS STEEL NUTS & BOLTS

■ PROJECT DATA

Custom Sizes Available - Fast!

	PROJECT NAME :	QTY	w	Н	OPTIONS
	ARCHITECT:				
2	DEALER:				
	CONTRACTOR:				
	LOCATION:	SPECIAL	INSTRUCT	IONS :	
	DATE:				
	TAGGING INSTRUCTIONS:		AL APPRO e or stamp		



To view Pricing and Additional Product Info.



TELEPHONE: 1-888-457-1275 FAX: 1-888-626-2907



PO BOX 66738 #76520, SAINT LOUIS, MO 63166-6738 USA




WEBSITE:


www.AccessDoorsAndPanels.com

BA-RRFD-T1

NON-HINGED PANEL RECESSED 1" FOR CERAMIC TILE/CONCRETE

NOMINAL DOOR SIZE	FRAME	OPENING	RECEIVIN	IG AREA	OVERALL	WEIGHT	
in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	LBS. (KG)
8 x 8	8.750 (222)	7.750 (222)	8.125 (206)	8.125 (206)	11.750 (298)	11.750 (298)	5 (2.2)
12 x 12	12.750 (324)	11.750 (324)	12.125 (308)	12.125 (308)	15.750 (476)	15.750 (476)	7 (3.2)
18 x 18	18.750 (476)	17.750 (476)	18.125 (460)	18.125 (460)	21.750 (552)	21.750 (552)	15 (6.8)
24 x 24	24.750 (629)	23.750 (629)	24.125 (613)	24.125 (613)	27.750 (705)	27.750 (705)	36 (16.3)

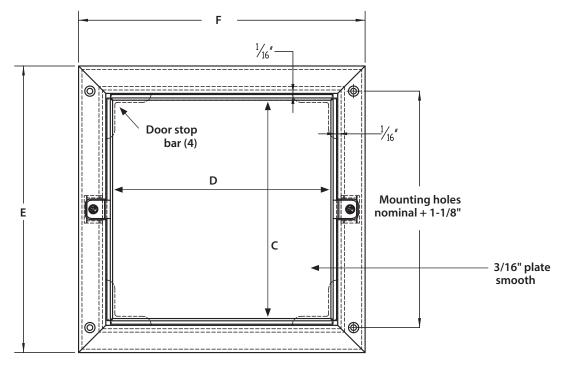



NOTES:

- MATERIAL: ALUMINUM
- · LOADING: 150 LBS. PER SQ. FT.
- 316 STAINLESS STEEL NUTS & BOLTS

