

## APPLICATION

- For installation in drywall walls requiring concealing of the door panel consistent to surroundings
- For use in walls, fire-rated for up to 90-minutes with a temperature rise of max 250°C (450°F) over 30 minutes

## FEATURES

- Recessed reinforced door fitted with 5/8" Fire-rated drywall.
- Concealed hinge & self-centering device ensures seamless appearance in walls
- Self-closing & self-latching door mechanism
- Perforated Frame ensures trouble-free application of skim coat to edge of the door
- Zinc coated steel provides superior corrosion resistance
- Testing standards UL 10(b) and ULC S104

## SPECIFICATIONS

**DOOR:** Steel-22 Gauge recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site.

**DOOR FRAME:** Steel-22 Gauge press bent for strength and rigidity with pre-punched flanges for convenient mounting and accepting skim coat finish on site

**HINGE:** Concealed

**FIRE RATING (WALLS):** Meets 1 1/2 hour fire rating requirement in accordance with UL 10(b) and CAN/ULC S104-10 for max size upto 24" x 36"

**LATCH:** Self-latching bolt, operated by flush key


**FINISH:** Satin coat steel

For a complete list of options visit  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

SKU: **BA-SMCW**

**FIRE RATED ACCESS DOOR**


RECESSED FOR DRYWALL WALLS

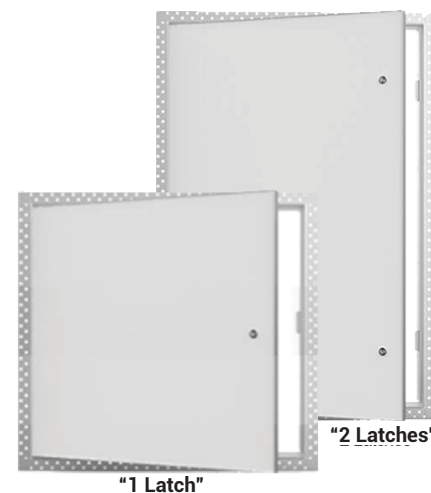


## DIMENSIONS AND APPEARANCE

| DOOR SIZE W x H<br>INCHES (MM) | LATCHES | WEIGHT<br>LBS | KG   |
|--------------------------------|---------|---------------|------|
| 12 x 12 (305 x 305)            | 1       | 10.0          | 4.50 |
| 16 x 16 (406 x 406)            | 1       | 14.0          | 6.40 |
| 18 x 18 (457 x 457)            | 1       | 18.0          | 8.20 |
| 24 x 24 (610 x 610)            | 2       | 29.0          | 13.1 |
| 26 x 36 (610 x 914)            | 2       | 42.0          | 19.0 |

Wall opening is W + 3/8" (9 mm)  
For detailed specifications see submittal sheet

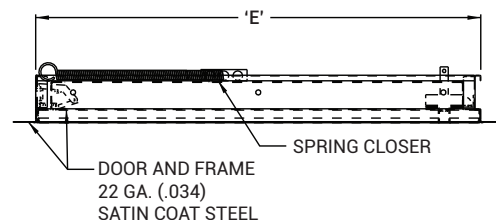


MANUFACTURED BY ACUDOR

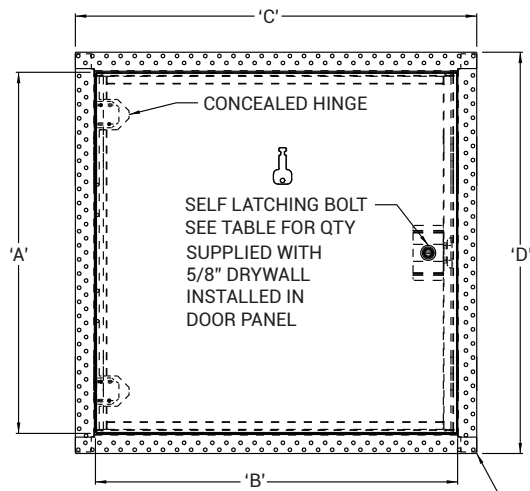

### VERTICAL WALLS

FOR USE IN VERTICAL WALLS FIRE RATED FOR UP TO 90 MINUTES WITH TEMPERATURE RISE RATING OF MAXIMUM 250° C (450° F) OVER 30 MINUTES.  
CONFORMS TO: UL10(B)  
CERTIFIED TO: CAN/ULC S104 THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL (MAX. SIZE 24" X 36")

PATENT PENDING

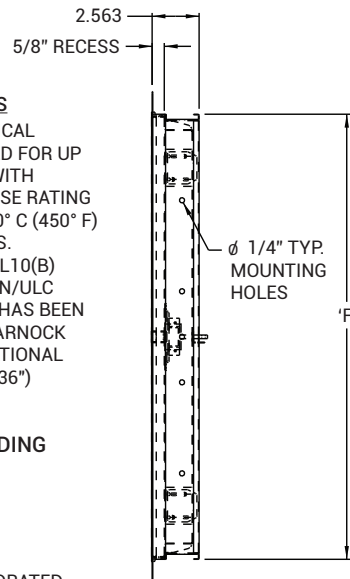

## PROJECT DATA

Custom Sizes Available - Fast!

|                        |                                              |   |   |         |
|------------------------|----------------------------------------------|---|---|---------|
| PROJECT NAME :         | QTY                                          | W | H | OPTIONS |
| ARCHITECT :            |                                              |   |   |         |
| DEALER :               |                                              |   |   |         |
| CONTRACTOR :           |                                              |   |   |         |
| LOCATION :             | SPECIAL INSTRUCTIONS :                       |   |   |         |
| DATE :                 |                                              |   |   |         |
| TAGGING INSTRUCTIONS : | SUBMITTAL APPROVAL :<br>(signature or stamp) |   |   |         |



TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA




WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)



# BA-SMCW

## RECESSED FOR DRYWALL

| NOMINAL DOOR SIZE   | A           | B           | C           | D           | E           | F           | LOCK |
|---------------------|-------------|-------------|-------------|-------------|-------------|-------------|------|
| Inches (mm)         |             |             |             |             |             |             |      |
| 12 x 12 (305 x 305) | 11.83 (300) | 11.89 (302) | 14.48 (368) | 14.48 (368) | 12.04 (306) | 12.04 (306) | 1    |
| 14 x 14 (356 x 356) | 13.83 (351) | 13.89 (353) | 16.48 (419) | 16.48 (419) | 14.04 (357) | 14.04 (357) | 1    |
| 16 x 16 (406 x 406) | 15.83 (402) | 15.89 (404) | 18.48 (469) | 18.48 (469) | 16.04 (407) | 16.04 (407) | 1    |
| 18 x 18 (457 x 457) | 17.83 (453) | 17.89 (454) | 20.48 (520) | 20.48 (520) | 18.04 (458) | 18.04 (458) | 1    |
| 24 x 24 (610 x 610) | 23.83 (605) | 23.89 (607) | 26.48 (673) | 26.48 (673) | 24.04 (611) | 24.04 (611) | 2    |
| 24 x 36 (610 x 914) | 35.83 (910) | 23.89 (607) | 26.48 (673) | 38.48 (977) | 24.04 (611) | 36.04 (915) | 2    |

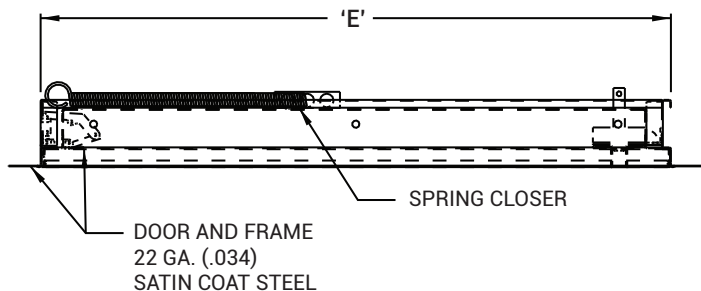

### VERTICAL WALLS

FOR USE IN VERTICAL WALLS FIRE RATED FOR UP TO 90 MINUTES WITH TEMPERATURE RISE RATING OF MAXIMUM 250° C (450° F) OVER 30 MINUTES.  
CONFORMS TO: UL10(B) CERTIFIED TO: CAN/ULC S104  
THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL (MAX. SIZE 24" x 36")

