



Quality Access Doors - FAST!

# TECHNICAL DATA SHEET

[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

## APPLICATION

For standard 1-3/4" door thickness and glazing thickness 3/16"-1 11/16". VLLPB-G's are also used for custom 1"-3" door thickness.

## SPECIFICATIONS

**APPLICATION:** For door thickness 1"-3" and glazing thickness 3/16" - 1-11/16". Must specify both:

Door Thickness: \_\_\_\_\_

Glazing Thickness: \_\_\_\_\_

For 1-3/4" door with glazing thickness of 3/16"-5/16" see VLLP

**FRAME MATERIAL:** 20 gauge cold rolled steel

**STANDARD FINISH:** Mineral bronze powder coat

**FASTENERS:** #8A Flathead Phillips SMS to match finish

### SIZE:

Minimum: 4" x 4"

Maximum: 48" x 90"

Door Cutout = Order Size (W x H)

Glazing Size = Order Size minus 1"

(W - 1" x H - 1")

Exposed Glazing = Order Size minus 2"

(W - 2" x H - 2")

**PROTRUSION:** For glazing thickness that is within 3/4" of the door thickness or thicker, frame will not be flush, Protrusion ranges from .11 - .84 .

## FIRE RATINGS


UL listed and labeled/stamped to ANSI/UL 10B, ANSI/UL 10C and CAN/ULC S104 when properly installed in rated and approved door. Ratings up to 180 minutes can be achieved depending on exposed glazing size and area

For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

SKU: **BA-VLLPB-G**

**LOW PROFILE VISION LITES**

SLIMLINE SERIES

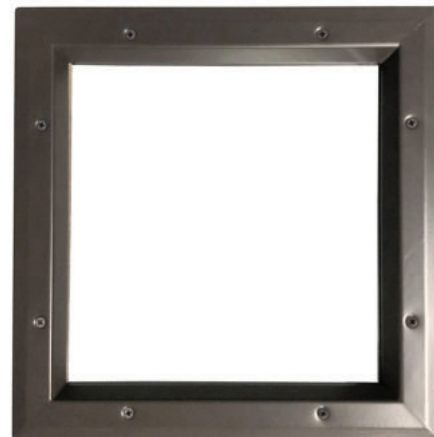


## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

### STANDARD SIZES:

MODEL	ROUGH OPENING	MODEL	ROUGH OPENING	COLOR	GLAZING THICKNESS	DOOR DEPTH
VLLPB 1212G 01	12" x 12"	VLLPB 0722G 01	7" x 22"	Gray	1"	1-3/4"
VLLPB 0535G 01	5" x 35"	VLLPB 2430G 01	24" x 30"			
VLLPB 0624G 01	6" x 24"	VLLPB 2436G 01	24" x 36"			
VLLPB 0627G 01	6" x 27"	VLLPB 2460G 01	24" x 60"			

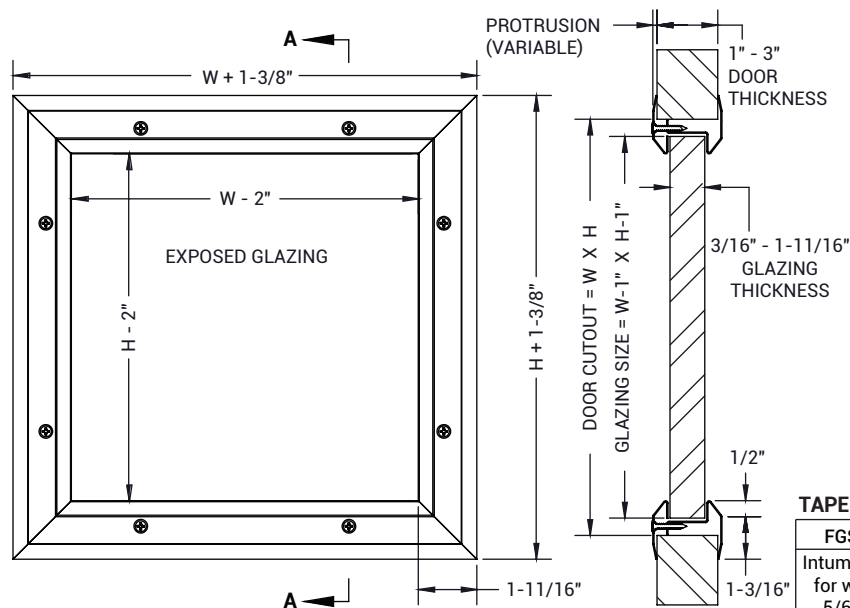

For detailed specifications see submittal sheet

SECTION A-A

### OPTIONS

**MATERIALS:** 20 gauge 304 Stainless steel, galvanized steel, zinc-plated steel

**MULLIONS:** or 1-3/4" Doors Only - 1" x 5/8" welded-on, formed mullions for a divided lite look that uses one (1) pane of glass

**PAKS:** Vision lite, glazing & glazing tape combined

### COMPATIBLE AIR

**LOUVERS GLAZING:**

Fire-Rated: PPF, FL, FLP, WS, PPL

Non-Rated: TEMP, ARM 1, ARM2, ARM3, BRG1

**OTHER:** Torx screws

### TAPE WHEN SOLD SEPARATELY

FGS3000S90	GTAPE 200B
Intumescent tape for wired glass 5/64" thick x 7/16" wide x 16 ft	Standard glazing tape 1/16" 1/16" thick x 3/8" wide x 200 ft

## PROJECT DATA

Custom Sizes & Options Available - Fast!

Scan or



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)