

## DESCRIPTIONS

Low profile, hem-strengthened Slimline vision lites mount flush to the door with self-attaching, single-sided fasteners. A minimal 1/8" protrusion provides a clean, aesthetic look. VLLP models are for standard door thickness 1-3/4" and glazing thickness 3/16" - 5/16".

## SPECIFICATIONS

**APPLICATION:** For door thickness 1-3/4" and glazing thickness 3/16" - 5/16"

**FRAME MATERIAL:** 20 gauge cold rolled steel

**STANDARD FINISH:** Mineral bronze powder coat

**FASTENERS:** #8A x 1-1/4" Flathead Phillips screws to match finish

### SIZE:

Minimum: 4" x 4"

Maximum: 48" x 90"

Door Cutout = Order Size (W x H)

Glazing Size = Order Size minus 1"

(W - 1" x H - 1")

Exposed Glazing = Order Size minus

2" (W - 2" x H - 2")

## OPTIONS

**MATERIALS:** 20 gauge 304 Stainless steel, galvaneal steel, zincplated steel

**MULLIONS:** 1" x 5/8" welded-on, formed mullions for a divided lite look that uses one (1) pane of glass

**PAKS:** Vision lite, glazing, and glazing tape combined

### COMPATIBLE AIR LOUVERS

#### GLAZING:

Fire-Rated: PPF, FL, FLP, FGL WS

Non-Rated: TEMP

**OTHER:** Torx screws

For a complete list of options visit  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

SKU: **BA-VLLPB**

## LOW PROFILE VISION LITES

### SLIMLINE SERIES




## DIMENSIONS AND APPEARANCE


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

### STANDARD SIZES:

MODEL	ROUGH OPENING	COLOR	MODEL	ROUGH OPENING	COLOR	MODEL	ROUGH OPENING	COLOR
VLLP-0535B	5" x 35"	Bronze	VLLP-0832B	8" x 32"	Bronze	VLLP-2424B	24" x 24"	Bronze
VLLP-0627B	6" x 27"		VLLP-0836B	8" x 36"		VLLP-2430B	24" x 30"	
VLLP-0630B	6" x 30"		VLLP-1212B	12" x 12"		VLLP-2432B	24" x 32"	
VLLP-0636B	6" x 36"		VLLP-1818B	18" x 18"		VLLP-2434B	24" x 34"	
VLLP-0722B	7" x 22"		VLLP-2060B	20" x 60"		VLLP-2436B	24" x 36"	
						VLLP-2460B	24" x 60"	
						VLLP-2462B	24" x 62"	
						VLLP-2464B	24" x 64"	
						VLLP-2466B	24" x 66"	

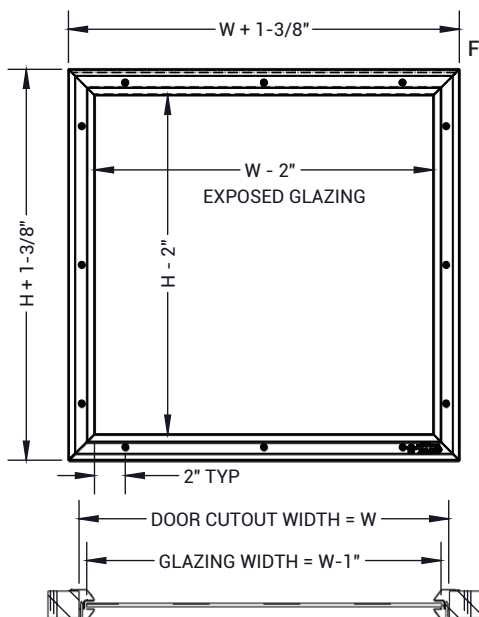

For detailed specifications see submittal sheet

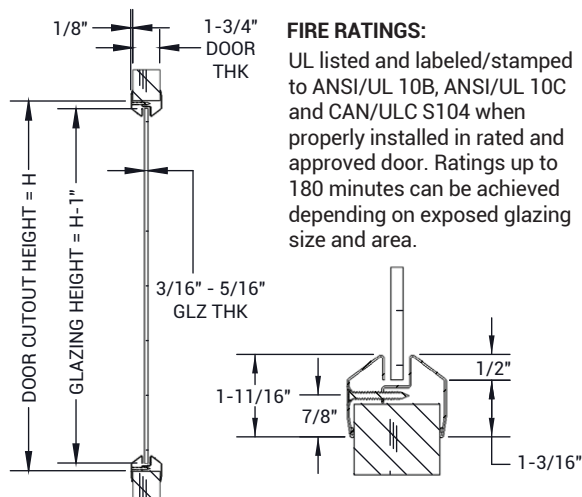

### FIRE RATINGS:

UL listed and labeled/stamped to ANSI/UL 10B, ANSI/UL 10C and CAN/ULC S104 when properly installed in rated and approved door. Ratings up to 180 minutes can be achieved depending on exposed glazing size and area.

## PROJECT DATA

**Custom Sizes & Options Available - Fast!**

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan or Click



To view Pricing and  
Additional Product Info.



TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)