

DESCRIPTION

Draft Stop Door is a non-rated access door designed to provide access through wall openings in the attics where draft stop conditions are needed. This self-closing and self-latching access door allows for access from both sides of the door.

FEATURES

- Wall Installation
- Self-Closing
- Custom Sizing

SPECIFICATIONS

MODEL: BDT/BDW/BDP

DOOR: 14 gauge Steel (self-closing)

FRAME: 16 gauge Steel

SIZE: Min: 6 inches by 6 inches

- BDT: 24 inches by 72 inches, 36 inches by 60 inches or 48 inches by 48
- BDW/BDP: 36 inches by 48 inches

INSTALLATION: Wall

FLANGE: 1 inch Exposed or Drywall Bead

- BDT: Flush Continuous Piano
- BDW/BDP: Concealed Pin

FINISH: White Powder Coat

OPTIONS: Flanges, Latches, Materials, Gaskets, Anchors

WARRANTY: 1 year

For a complete list of options visit www.AccessDoorsAndPanels.com

Scan or (h) Click

SUBMITTAL/TECHNICAL DATA SHEET





DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


ORDER GUIDE:

BASE	FLANGE	LATCH	WIDTH	Х	LENGTH	OPTIONS
BD						
	T 1 inch Flange	K Knurled Knob/ Key Operated Latch	STANDARI	SIZ	ES (W X L)	B Galvannealed
	W Drywall Bead	Bolt	22" X 36" 24" X 36"		30" X 30" 30" X 36"	G Gasketing
	P Plaster Bead	M Mortise Lock (1-1/8") Prep	24" X 48" 24" X 60"		36" X 36" 36" X 48"	S Type 304 Stainless Steel

Rough opening is door size +1/4 inch minimum. Additional sizes available, call for more information.

For Detailed Specifications See Submittal Sheet





■ PROJECT DATA

PROJECT NAME

ARCHITECT :

Custom Sizes Available - Fast!

国金8500	e) E
	47.

To view Pricing and Additional Product Info.

7/1/20	DEALER:
	CONTRACTOR:
	LOCATION:
	DATE:
	TAGGING INSTRUCTIONS:

TELEPHONE: PO BOX 66738 #76520, 1-888-457-1275 SAINT LOUIS, MO 63166-6738 USA 1-888-626-2907



QTY



SPECIAL INSTRUCTIONS

SUBMITTAL APPROVAL (signature or stamp)


WFBSITF:

www.AccessDoorsAndPanels.com

OPTIONS

BDT

DRAFT STOP ACCESS DOOR

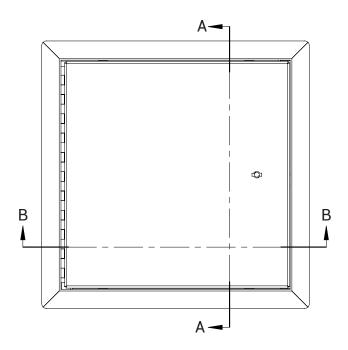


NOTES:


- 1 FRAME:
- 2 DOOR: Cold Rolled Steel, 14 GA
- (3) FINISH: White Powder Coat
- 4 HINGE:
- $\overline{\text{5}}$ SECONDARY LATCH: Varies
- 6 LOCK: Knurled Knob/Keyed Slam Latch

OPTIONS:

Drip Cap (C) Gasket Installed (G) Masonry Anchors (M)

ROUGH OPENING: W + 0.25" x H + 0.25" CLEAR OPENING: W - 2.375" x H - 1.125" DEGREE OF OPENING: 125°

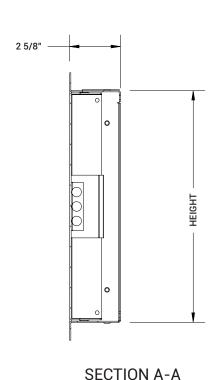

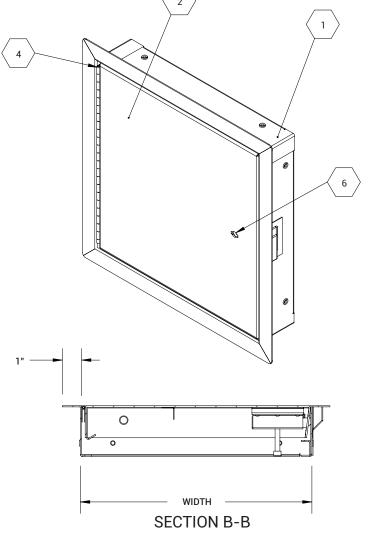



BDT

DRAFT STOP ACCESS DOOR

