

DESCRIPTION

Draft Stop Door is a non-rated access door designed to provide access through wall openings in the attics where draft stop conditions are needed. This self-closing and self-latching access door allows for access from both sides of the door.

FEATURES

- Wall Installation
- Self-Closing
- Custom Sizing

SPECIFICATIONS

MODEL: BDT/BDW/BDP

DOOR: 14 gauge Steel (self-closing)

FRAME: 16 gauge Steel

SIZE: Min: 6 inches by 6 inches

Max:

- BDT: 24 inches by 72 inches, 36 inches by 60 inches or 48 inches by 48 inches
- BDW/BDP: 36 inches by 48 inches

INSTALLATION: Wall

FLANGE: 1 inch Exposed or Drywall Bead

HINGE:

- BDT: Flush Continuous Piano
- BDW/BDP: Concealed Pin

FINISH: White Powder Coat

OPTIONS: Flanges, Latches, Materials, Gaskets, Anchors

WARRANTY: 1 year

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **BDW**

DRAFT STOP ACCESS DOOR






DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

ORDER GUIDE:

BASE	FLANGE	LATCH	WIDTH	X	LENGTH	OPTIONS
BD						
	T 1 inch Flange	K Knurled Knob/ Key Operated Latch Bolt	STANDARD SIZES (W X L)			B Galvannealed
	W Drywall Bead		22" X 36"	30" X 30"		G Gasketing
		M Mortise Lock (1-1/8") Prep	24" X 36"	30" X 36"		
	P Plaster Bead		24" X 48"	36" X 36"		S Type 304 Stainless Steel
			24" X 60"	36" X 48"		

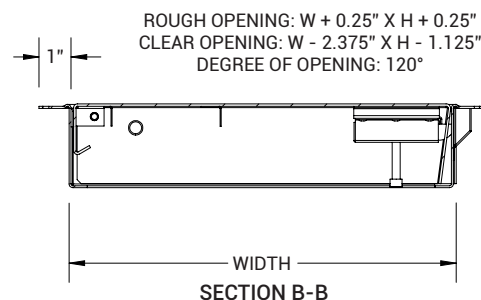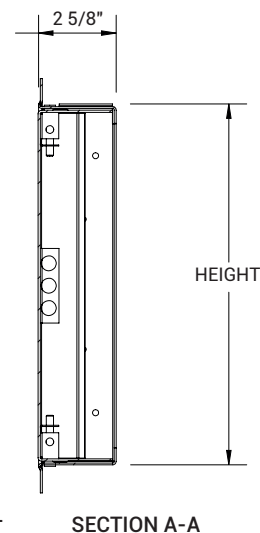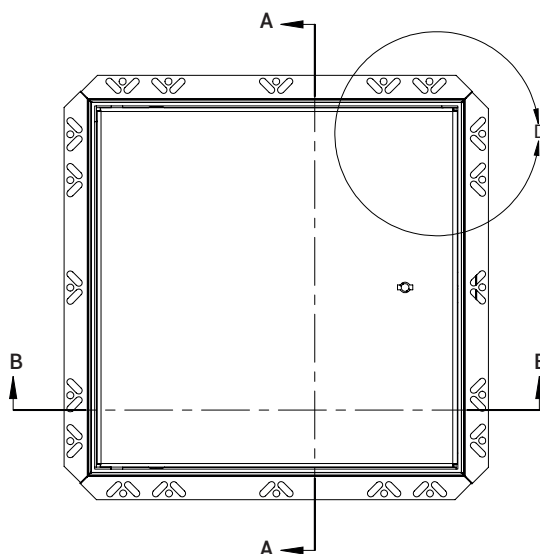

For Detailed Specifications See Submittal Sheet



PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA




WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



BDW

DRAFT STOP ACCESS DOOR

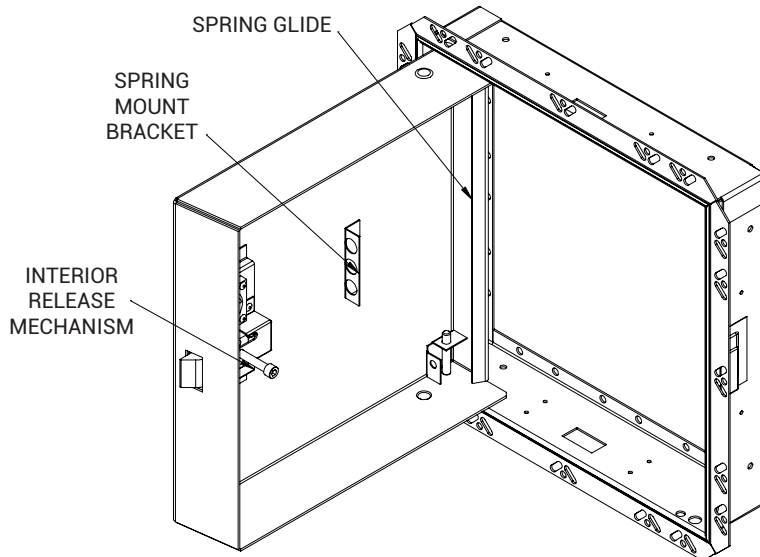





NOTES:

- ① FRAME:
- ② DOOR: Cold Rolled Steel, 14GA
- ③ FINISH: White Powder Coat
- ④ HINGE:
- ⑤ SECONDARY LATCH: Varies
- ⑥ LOCK: Knurled Knob/Keyed Slam Latch

OPTIONS:

Gasket Installed (G)
Masonry Anchors (M)

ROUGH OPENING: W + 0.25" x H + 0.25"
CLEAR OPENING: W - 2.375" x H - 1.125"
DEGREE OF OPENING: 125°

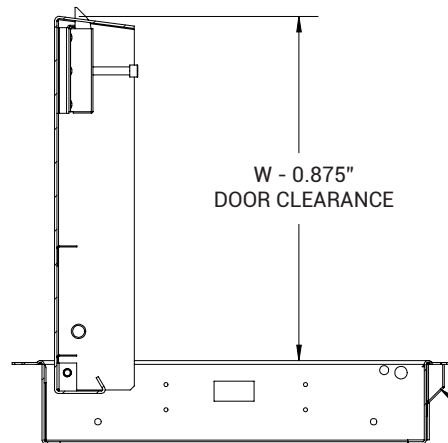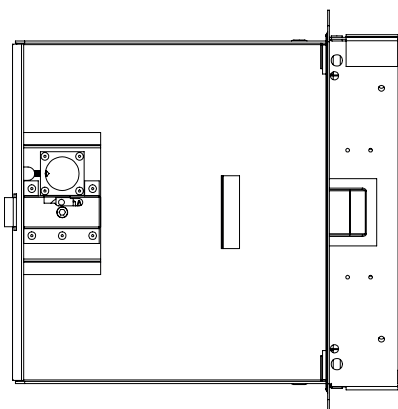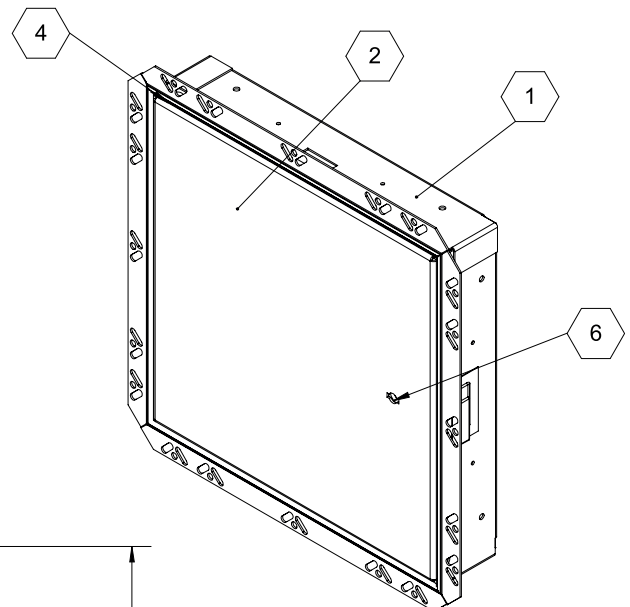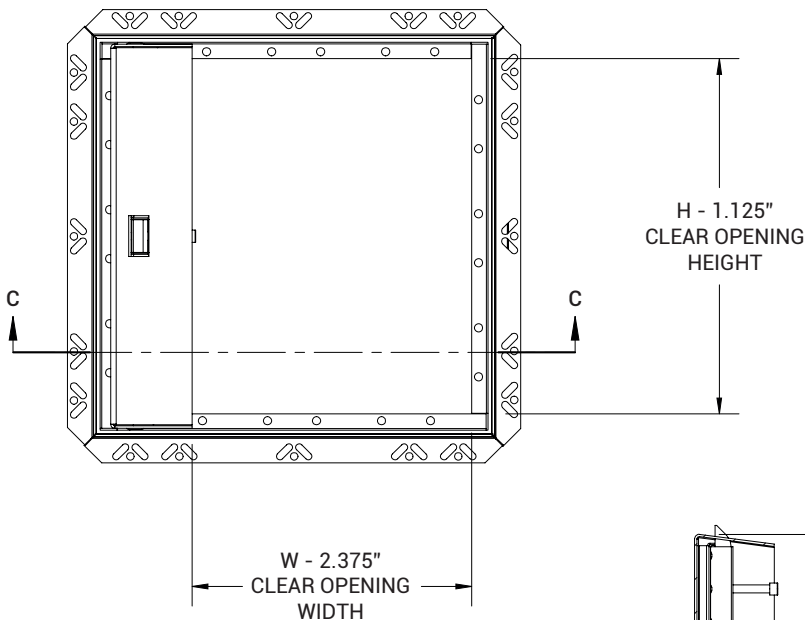

SECTION C-C

LATCH BOLT COVER
EXTENDS 1/2" BEYOND
OUTSIDE EDGE OF FRAME