

SUBMITTAL/TECHNICAL DATA SHEET



DESCRIPTION

Architectural Recessed Floor Door is engineered with a recess to allow for ceramic tile or concrete flooring. This design preserves the architectural aesthetics while maintaining a minimal sight line.

FEATURES

- Pedestrian Load
- Minimal Sight Line - Concealed Frame
- Recessed for Infill
- Fully Gasketed
- Versatile Mounting - Cast-In or Bolt-In
- Interior Use

SPECIFICATIONS

LOAD: 300psf

DOOR: Single Leaf

MATERIAL:
Aluminum: 1/4 inch, mill finish with gray primer on exterior frame (for cast-in only).

COVER: Recessed for 1 inch flooring infill.

FRAME: Extruded with channel for anchor bolt.

INSTALLATION: Cast-In or Bolt-In.

SPRING: Gas spring.


HINGE: Nickel plated concealed hinge.

HOLD OPEN ARM: Gas spring holds cover in open position.

LATCH: Slam latch, Type 316 stainless steel with inside lever handle, includes removable 5/16 inch steel square "L" handle and threaded plug.

WARRANTY: 5 year

For a complete list of options visit www.AccessDoorsAndPanels.com

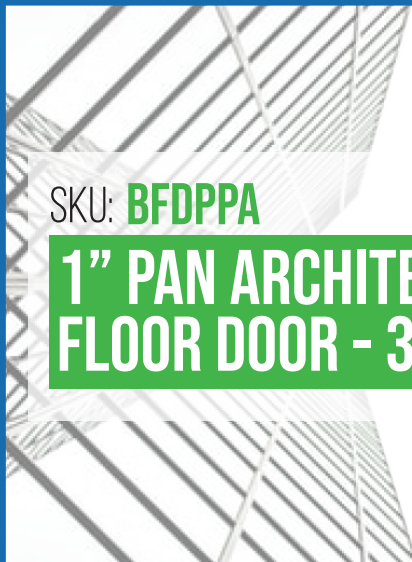

SKU: **BFDPPA**

1" PAN ARCHITECTURAL FLOOR DOOR - 300PSF



DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

ORDER GUIDE:

MODEL	WIDTH	X	LENGTH	MATERIAL	COVER	L
BFDPPA						
			18" X 18" 24" X 24" 30" X 36" 36" X 36"	S - SINGLE DOOR	A - ANCHOR B - BOLT-IN	

Additional sizes and options available, call for more information.

For Detailed Specifications See Submittal Sheet

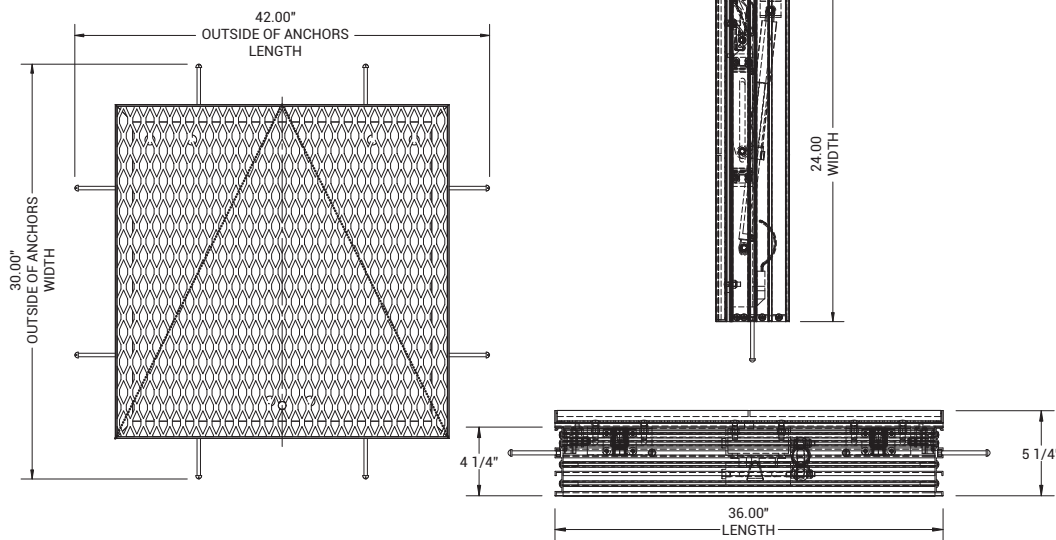

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA






WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



BFDPPA

300PSF 1 INCH PAN ARCHITECTURAL FLOOR DOOR

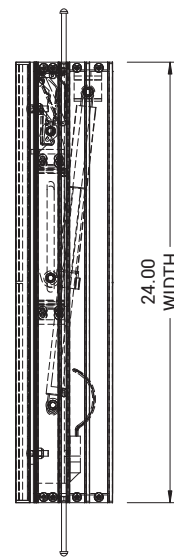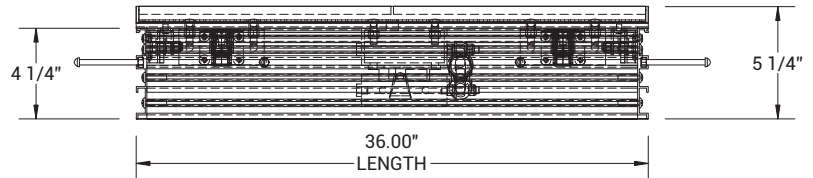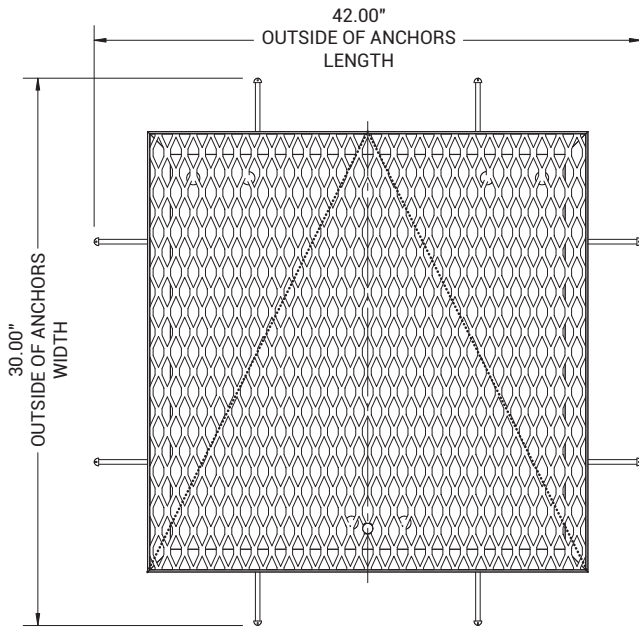

SPECIFICATIONS:

- ① **DOOR:** ALUMINUM, 1/4" SMOOTH PLATE, MILL FINISH WITH A LIVE LOAD OF 300 PSF WITH A MAXIMUM DEFLECTION OF L/160.
- ② **FRAME:** ALUMINUM, F-2C EXTRUSION, PRIMER COAT FINISH ON EXTERIOR SURFACES THAT COME IN CONTACT WITH CONCRETE.
- ③ **HINGES:** CABINET STYLE LIFT HINGE, SPRING LOADED NICKLE PLATED STEEL.
- ④ **SLAM LATCH:** TYPE 316 STAINLESS STEEL WITH INSIDE LEVER HANDLE AND OUTSIDE REMOVABLE 5/16" SQUARE L-HANDLE.
- ⑤ **COUNTER-BALANCE SPRING:** DAMPENED GAS SPRING WITH INTEGRATED HOLD OPEN MECHANISM, BLACK NITRIDE FINISH.
- ⑥ **ANCHOR:** BOLT ON FORMED ANCHORS PROVIDED.
- ⑦ **TILE EXTRUSION:** ALUMINUM EXTRUSION RECESSED 3/4" WITH EXPANDED METAL MESH BASE FOR CONCRETE. MESH IS REMOVABLE FOR WOOD OR RUBBER FILL.
- ⑧ **GASKET:** EPDM, ON FRAME AROUND PERIMETER.
 - (WT1) TERRAZZO TILE FILL, 3-7lbs/ft²
 - (WT2) CONCRETE FILL, 145lbs/ft²
 - (WT3) WOOD FILL, 25-50lbs/ft²
 - (WT4) RUBBER FILL, 95lbs/ft²

FLOOR DOOR SIZE: 24" (WIDTH) x 36" (LENGTH)

CLEAR UNOBSTRUCTED OPENING: 18" (WIDTH) x 33" (LENGTH)

CLEAR UNOBSTRUCTED OPENING: 24.13" (WIDTH) x 36.13" (LENGTH)

