

DESCRIPTION

The HVAC Access Door is available in large sizes to provide easy access for service and repair of equipment.

FEATURES

- 1 1/2 inch thick Linacoustic insulation for superior acoustical and thermal performance
- Optional Gasket
- Optional return air
- Custom Sizing
- Latching Options

SPECIFICATIONS

MODEL: BHVAC

DOOR:
20 gauge Steel (20g liner available)

FRAME: 16 gauge Steel

SIZE:
Min: 28 inches by 42 inches
IT: Max: 36 inches by 72 inches

INSTALLATION: Wall & Ceiling

FLANGE: 1 1/4 inch exposed

HINGE: Concealed Pin

INSULATION: 1 1/2 inch Fiberglass

FINISH: White Powder Coat

OPTIONS: Gasket, Interior Liner,
Perforated Door for Make up Air

WARRANTY: 1 year

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **BHVAC**
HVAC ACCESS DOOR



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<




ORDER GUIDE:

BASE	LATCH	WIDTH	X	LENGTH	OPTIONS
BHVAC		STANDARD SIZES (W X L)			
	C Screwdriver Cam Latch	30" X 48"	32" X 60"	34" X 72"	P Perforated Door
	L Key operated Cam Latch	30" X 54"	32" X 66"	36" X 48"	G Gasketing Installed
	P Pinned Hex Cam Latch	30" X 60"	32" X 72"	36" X 54"	Q Liner
	M Mortise Prep (1 1/2 inch) Prep	30" X 72"	34" X 54"	36" X 66"	C Ceiling
	H Hex Head Cam*	32" X 48"	34" X 60"	36" X 72"	
		32" X 54"	34" X 66"		

Rough opening is door size +1/4 inch minimum. Additional sizes available, call for more information.

*Standard Latch.

For Detailed Specifications See Submittal Sheet

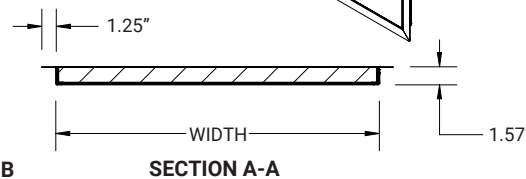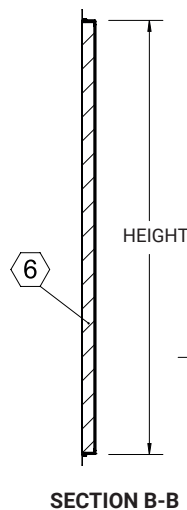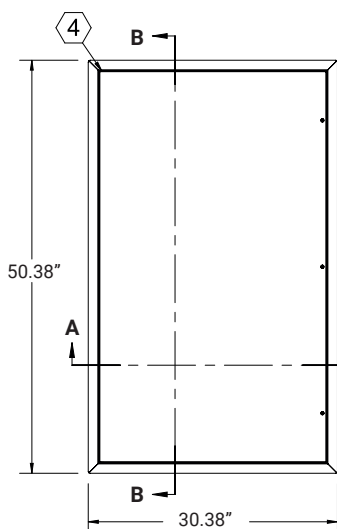

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA




WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



BHVAC

HVAC ACCESS DOOR

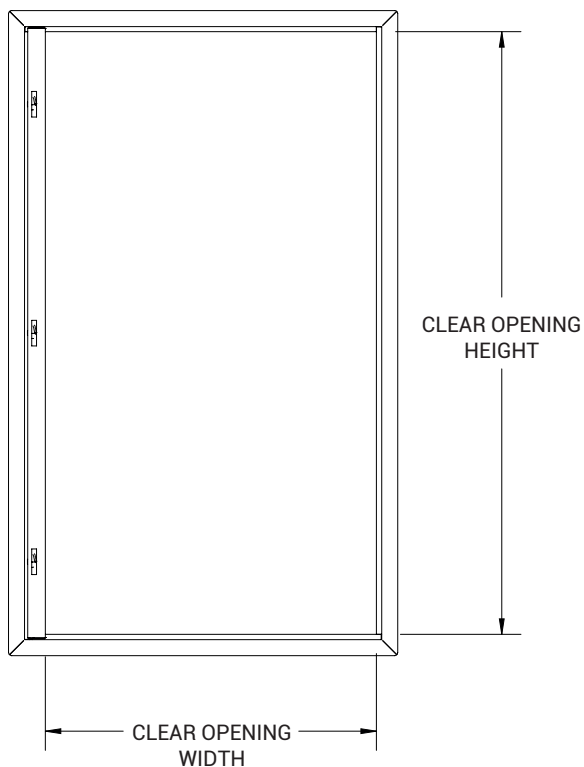

NOTES:

- ① DOOR: Cold Rolled Steel, 14 GA
- ② FRAME: 16 GA Steel, 1.25" Flange
- ③ FINISH: White Pwd
- ④ HINGE: Concealed Pin Hinge
- ⑤ LATCH: Hex Cam
- ⑥ INSULATION: 1.5" Fiberglass Insulation for Sound Attenuation

OPTIONS:

- Gasket Installed
- Perforated Door, in2 Free Area
- Door Liner, 20 Ga Steel

