

DESCRIPTION

The Architectural Access Door is designed with the architect in mind. Constructed with an industry-standard 16 gauge steel door, the updated design provides superior strength and design aesthetics.

FEATURES

- Anti-flex frame
- Removable and repositionable door
- Painless installation
- Optional stainless steel
- Double door available

SPECIFICATIONS

MODEL: BNT/BNW/BNP

DOOR:

BNT/BNW: 16 gauge Steel (removable) or 16 gauge Type 304 Stainless Steel
BNP: 14 gauge Steel or 16 gauge Type 304 Stainless Steel

FRAME: 16 gauge Steel or 16 gauge Type 304 Stainless Steel

SIZE:

SINGLE DOOR

Minimum: 6 inches by 6 inches
Maximum: 24 inches by 72 inches or 48 inches by 48 inches

DOUBLE DOOR

Minimum: 24 inches by 24 inches
Maximum: 36 inches by 72 inches or 48 inches by 64 inches or 72 inches by 48 inches

INSTALLATION: Wall or Ceiling

FLANGE: 1 inch exposed, Drywall Bead or Plaster Bead

HINGE: Concealed spring button or Flush continuous piano

PAN DEPTH: 1/2 inch

LATCH: Screwdriver Cam Latch, Key Operated Cam Latch, or Mortise Lock (1-1/8 inch) Prep

FINISH: White Powder Coat (steel) or #4 Satin (stainless steel)

WARRANTY: 1 year

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **BNT**

ARCHITECTURAL ACCESS DOOR



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


ORDER GUIDE:

BASE	FLANGE	LATCH	WIDTH	X	LENGTH	OPTIONS
BN			STANDARD SIZES (W XL)			
	T - 1 inch Flange	C - Screwdriver Cam Latch	6" X 6"	16" X 20"	24" X 36"	B - Galvannealed
	W - Drywall Bead	L - Key Operated Cam Latch	8" X 8"	18" X 18"	24" X 48"	F14 - 14 gauge frame & door
	P - Plaster Bead	M - Mortise Lock Prep (1-1/8")	10" X 10"	18" X 24"	30" X 30"	L - Louvered Door
			12" X 12"	20" X 30"	30" X 36"	S - Type 304 Stainless Steel
			12" X 18"	22" X 22"	32" X 32"	D14 - 14 gauge door
			12" X 24"	22" X 30"	36" X 36"	D - Double door
			14" X 14"	24" X 24"		
			16" X 16"	24" X 30"		


Double doors are available (Some options may not be available)

Rough opening is door size + 1/4 inch

Additional sizes available, call for more information.

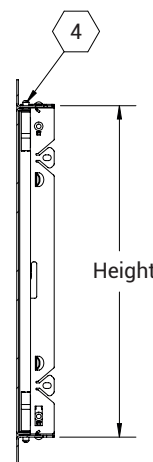


SECTION A-A

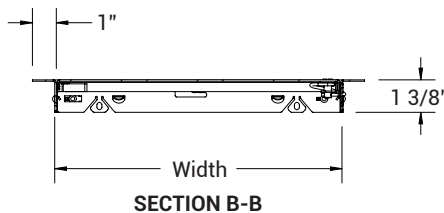

SECTION B-B

Lead Time Average is 1-10 Days
Delivery time is additional.

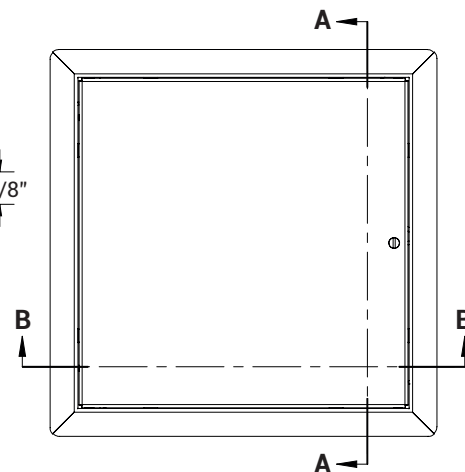

For Detailed Specifications See Submittal Sheet

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA







WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



BNT

MEDIUM SECURITY ACCESS DOOR

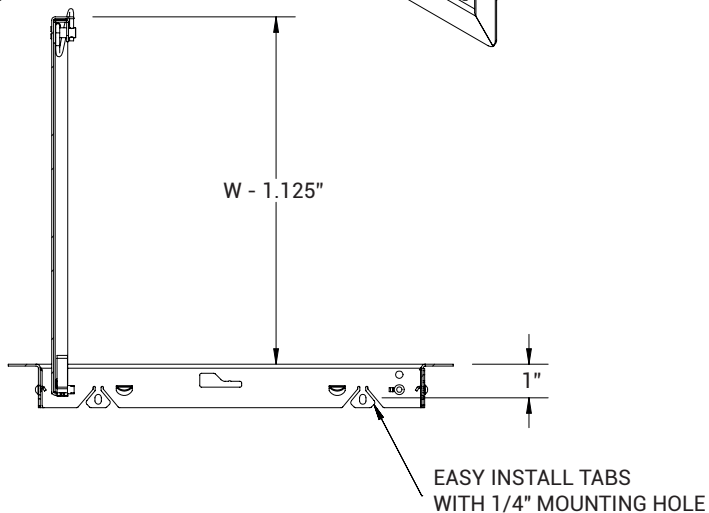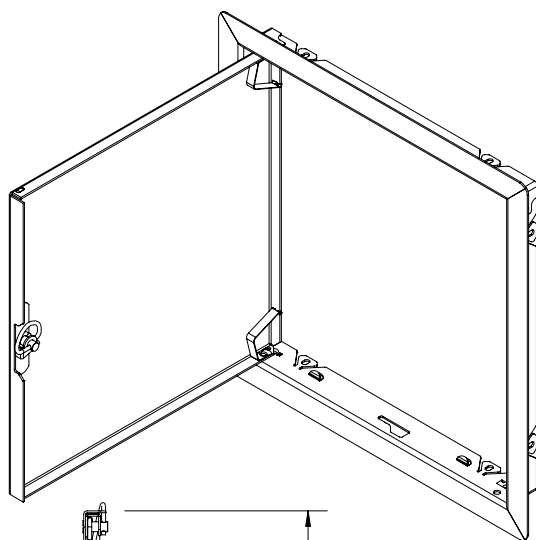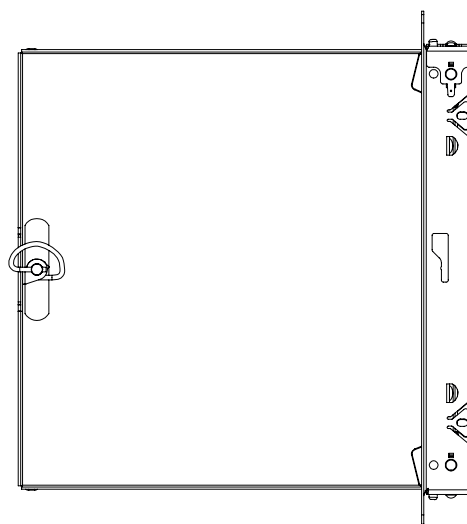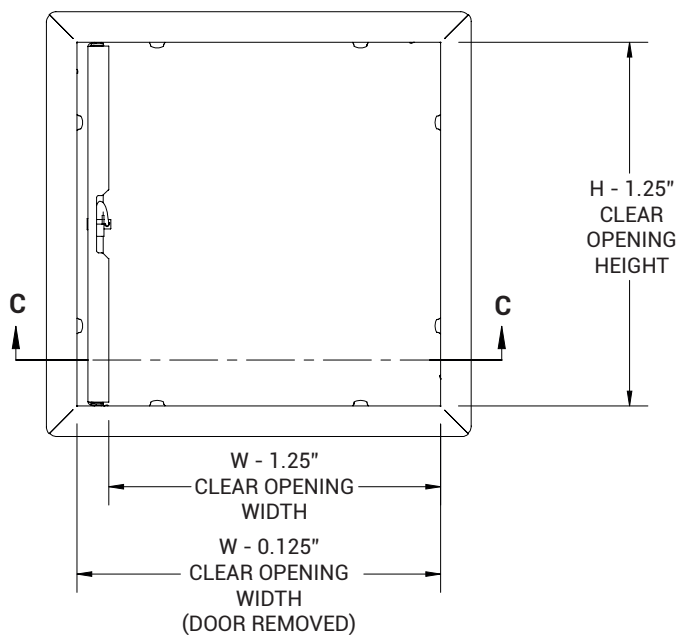

SPECIFICATIONS:

① DOOR	:	16 Ga Steel, 1" Flange
② FRAME	:	16 Ga Steel
③ FINISH	:	White Pwd
④ HINGE	:	
⑤ LATCH	:	
⑥ LOCK	:	No Lock

OPTIONS:

■ Drip Cap (C)

ROUGH OPENING: 0.25" X 0.25"

CLEAR OPENING: 1.25" X 1.25"

DEGREE OF OPENING: 105°

