

SUBMITTAL/TECHNICAL DATA SHEET



DESCRIPTION

Plastic Access Door provides simple and inexpensive access through wall or ceiling surfaces in residential or light-duty applications. The lightweight design with a removable door is easily installed by applying glue or adhesive to the back of the frame.

FEATURES

- Removable Door
- Wall or Ceiling Installation
- Paintable Finish

SPECIFICATIONS

MODEL: BPL

DOOR: 1/8 inch Plastic

FRAME: 1/8 inch Plastic

SIZE:
Min: 6 inches by 9 inches
Max: 14 inches by 29 inches

INSTALLATION: Wall or Ceiling

FLANGE: Exposed

HINGE: None

FINISH: White, Grip

WARRANTY: 1 year

For a complete list of options visit
www.AccessDoorsAndPanels.com



SKU: **BPL**



PLASTIC ACCESS DOOR

DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

ORDER GUIDE:

BASE	WIDTH	X	HEIGHT
BPL			
STANDARD SIZES			
	4" X 6"	14" X 14"	
	6" X 9"	14" X 29"	
	8" X 8"	22" X 22"	

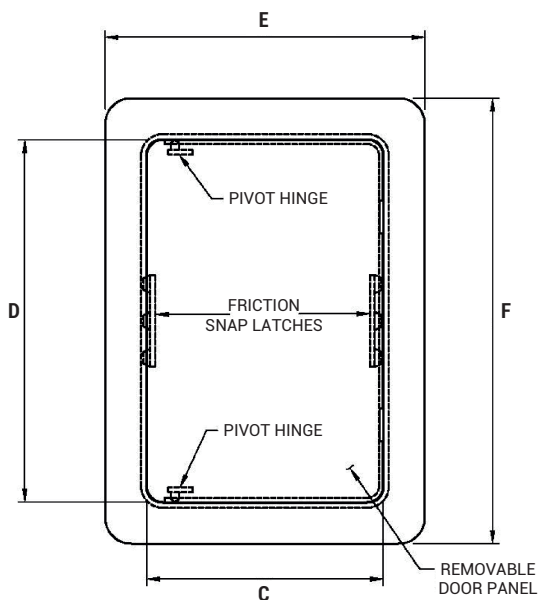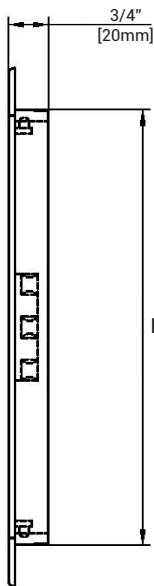

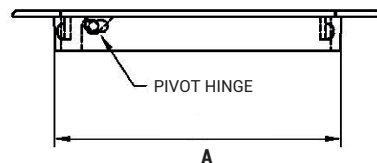

FOR DETAILED SPECIFICATIONS SEE SUBMITTAL SHEET



PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com




BPL

PLASTIC ACCESS DOOR

QTY	MODEL	STANDARD SIZE W x H		ROUGH OPENING SIZE		DOOR SIZE		OVERALL SIZE		WT./DOOR	
		Inches	Metric (mm)	A	B	C	D	E	F	LBS.	KG.
	PL-0406	4 x 6	102 x 152	4" (102)	6" (152)	3 ^{3/4} " (95)	5 ^{3/4} " (145)	5 ^{1/16} " (129)	7 ^{1/8} " (181)	0.5	0.25
	PL-0609	6 x 9	152 x 229	6" (152)	9" (229)	5 ^{3/4} " (145)	8 ^{3/4} " (222)	7 ^{11/16} " (195)	10 ^{3/4} " (273)	0.5	0.25
	PL-0808	8 x 8	203 x 203	8" (203)	8" (203)	7 ^{3/4} " (196)	7 ^{3/4} " (196)	9 ^{3/4} " (247)	9 ^{3/4} " (247)	0.5	0.25
	PL-1212	12 x 12	305 x 305	11 ^{13/16} " (300)	11 ^{13/16} " (300)	11 ^{1/2} " (292)	11 ^{1/2} " (292)	14 ^{1/16} " (357)	14 ^{1/16} " (357)	0.5	0.25
	PL-1414	14 x 14	356 x 356	14" (355)	14" (355)	13 ^{11/18} " (348)	13 ^{11/18} " (348)	16 ^{1/4} " (412)	16 ^{1/4} " (412)	0.75	0.33
	PL-2222	22 x 22	559 x 559	22" (559)	22" (559)	21 ^{3/4} " (552)	21 ^{3/4} " (552)	24 ^{13/16} " (630)	24 ^{13/16} " (630)	5.0	2.27

* **BOLD VALUES ARE HINGE SIDE**

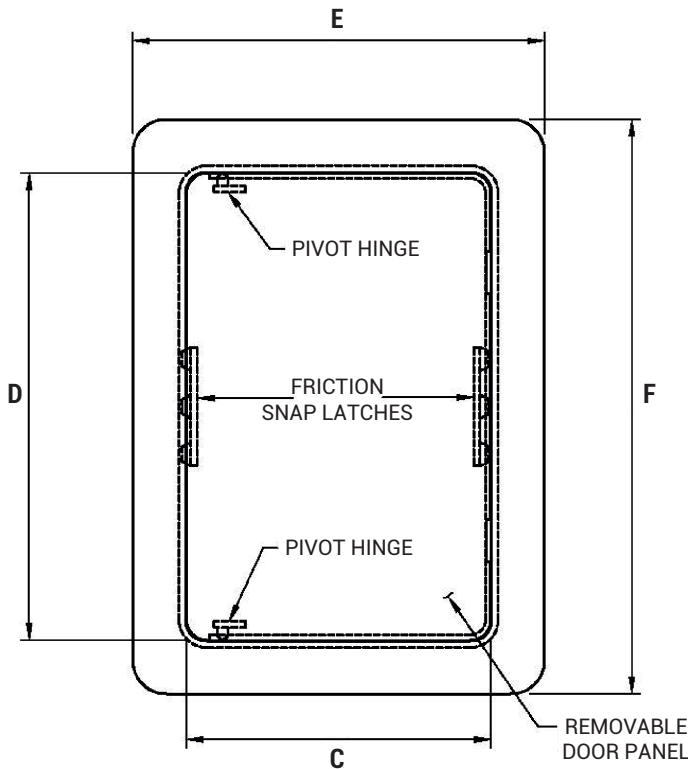

SPECIFICATIONS:

DOOR / DOOR FRAME:

- X" [3mm] HIGH IMPACT STYRENE WITH U.V. STABILIZERS.
- DOOR PANEL IS BOTH HINGED AND REMOVABLE FOR UNOBSTRUCTED ACCESS.
- DOOR PANEL IS HELD CLOSED BY FRICTION SNAP LATCHES.
- FINISH IS WHITE WITH TEXTURED EXPOSED SURFACE READY FOR PAINTING OR WALLPAPERING.
- DOOR HAS A TAPERED FRAME AND IS EASILY INSTALLED BY PRESS FIT INTO AN OPENING CUT TO SIZE OR BY APPLYING CAULKING ADHESIVE TO THE BACK OF THE FRAME AND PRESSING INTO PLACE.

