

DESCRIPTION

Exterior Access Door provides efficient access from the exterior of your building without compromising security or weather resistance.

FEATURES

- Building Key Compatible
- Insulated for Temperature Control
- Tested for Air and Water Penetration

SPECIFICATIONS

MODEL: BXT/BXP

DOOR: 24 gauge Steel

FRAME: .080 inch 6063-T5 Extruded Aluminum

SIZE:
Min: 12 inches by 12 inches
Max: 48 inches by 60 inches

INSTALLATION: Wall

FLANGE: 1 inch Exposed, or Stucco/Plaster Bead

HINGE: Stainless Steel Continuous Piano

FINISH: Mill

WARRANTY: 1 year

OPTIONS: Flanges, Latches, and Materials

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **BXP**

EXTERIOR ACCESS DOOR





DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

ORDER GUIDE:

BASE	FLANGE	LATCH	WIDTH	X	LENGTH	OPTIONS
BX						
	T 1 inch Flange	A Non-Locking Handle C Screwdriver Cam Latch	STANDARD SIZES (W X L) 12" X 12" 24" X 24" 16" X 16" 24" X 30" 18" X 18" 24" X 36" 20" X 30" 36" X 36"			A ALUMINUM DOOR
	P Plaster Bead	L Locking Handle				C DRIP CAP
		M Mortise Lock Prep (1-1/8")				P PADLOCK HASP
		P Padlock Hasp				S STAINLESS STEEL, TYPE 304

Rough opening is door size. Additional sizes available, call for more information.

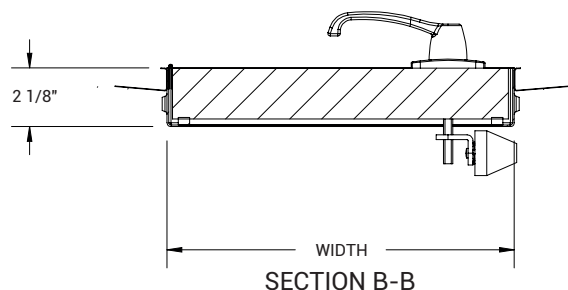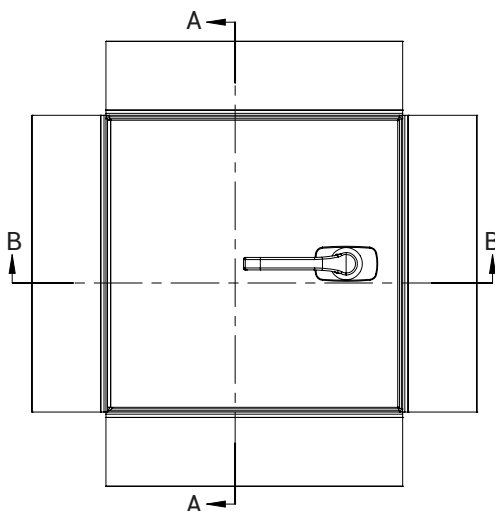

For Detailed Specifications See Submittal Sheet

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA




WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



BXP




EXTERIOR ACCESS DOOR

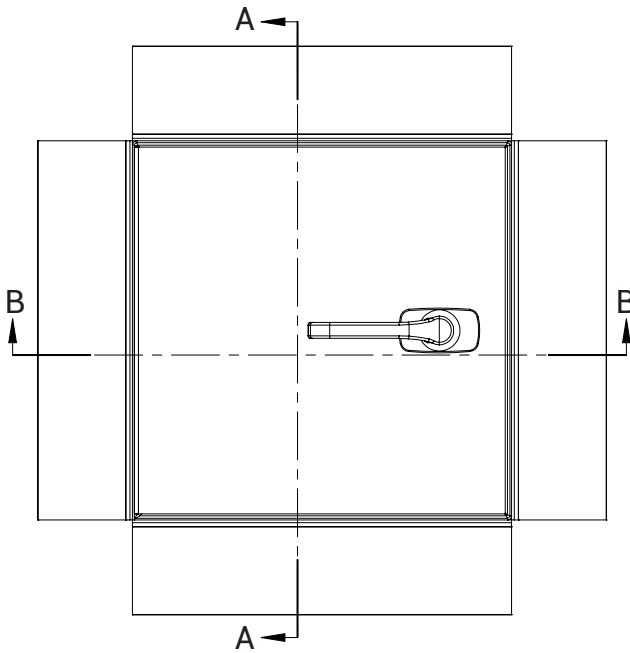

NOTES:

- ① FRAME: 16Ga GALV G90 Steel, Plaster Bead
- ② DOOR: 16Ga GALV G90 Steel, Plaster Bead
- ③ HINGE: 16Ga GALV G90 Steel, Plaster Bead
- ④ GASKET: Self-adhesive Closed Cell Foam Tape
- ⑤ INSULATION: Foam Insulation, 2-1/4lb Density, 12 R-Value
- ⑥ LATCH: Non-Locking Handle

ROUGH OPENING: W" X H"
CLEAR OPENING: W - 3.125" X H - 2.0"
DEGREE OF OPENING: 180°
LATCHING POINTS: Varies

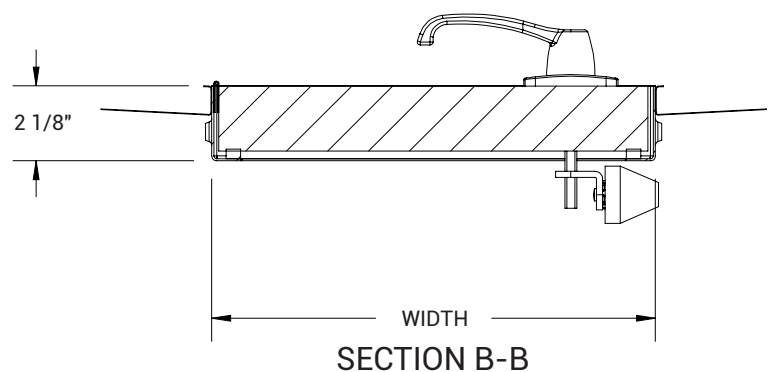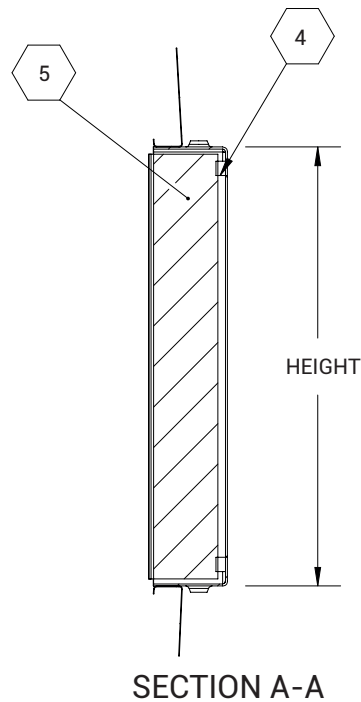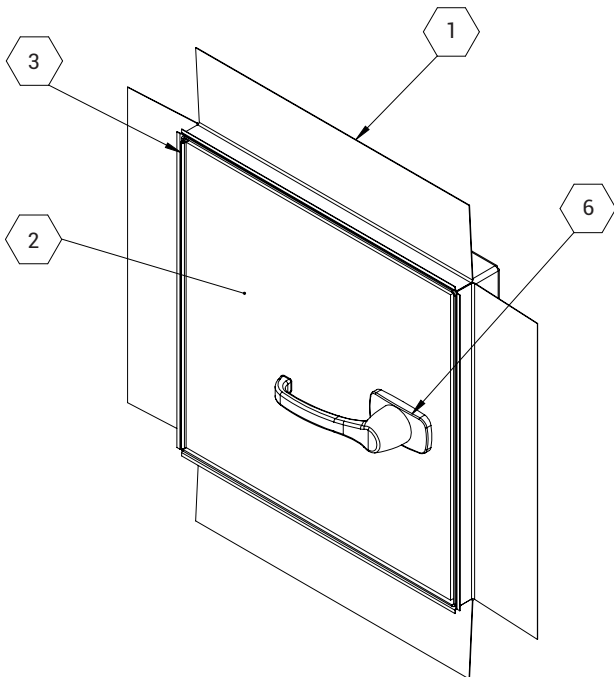



BXP

EXTERIOR ACCESS DOOR

