

APPLICATION

CAD-FR fire resistant access door is designed for use in a suspended drywall ceiling. The CAD-FR is not fire rated. However, the combination of steel and fire rated tile supplied by others may maintain the fire resistant quality of the ceiling assembly. The door is recessed 1 1/2" (38) to accommodate dual layered ceiling tile. Consult local Fire Codes for each application.

SPECIFICATIONS

MATERIAL: CAD-FR Series is 16 gauge satin coat steel door and 16 gauge satin coat steel frame. The CAD-FRSS stainless steel Series is 16 gauge # 304 stainless steel door and frame

DOOR: Recessed 1 1/2" (38) door panel to accept tile, drywall or finishing materials

FRAME: Flush to surface. Mounting flange is 1 1/8" (28) wide and recessed 5/8" (16) from the door

HINGE: Concealed pivot pins

STANDARD LOCK: Flush mounted, screwdriver operated cam

OPTIONAL LOCK: Allen key, cylinder key, paddle latch, or vandal resistant latch. All of MIFAB's cylinder key locks are keyed alike

FINISH: Satin coat steel doors have a primed white finish. Stainless steel doors have a #4 brush satin finish

PACKAGING: Individual pack




SKU: **CAD FR**

CEILING/WALL ACCESS DOOR

FIRE RESISTANT

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

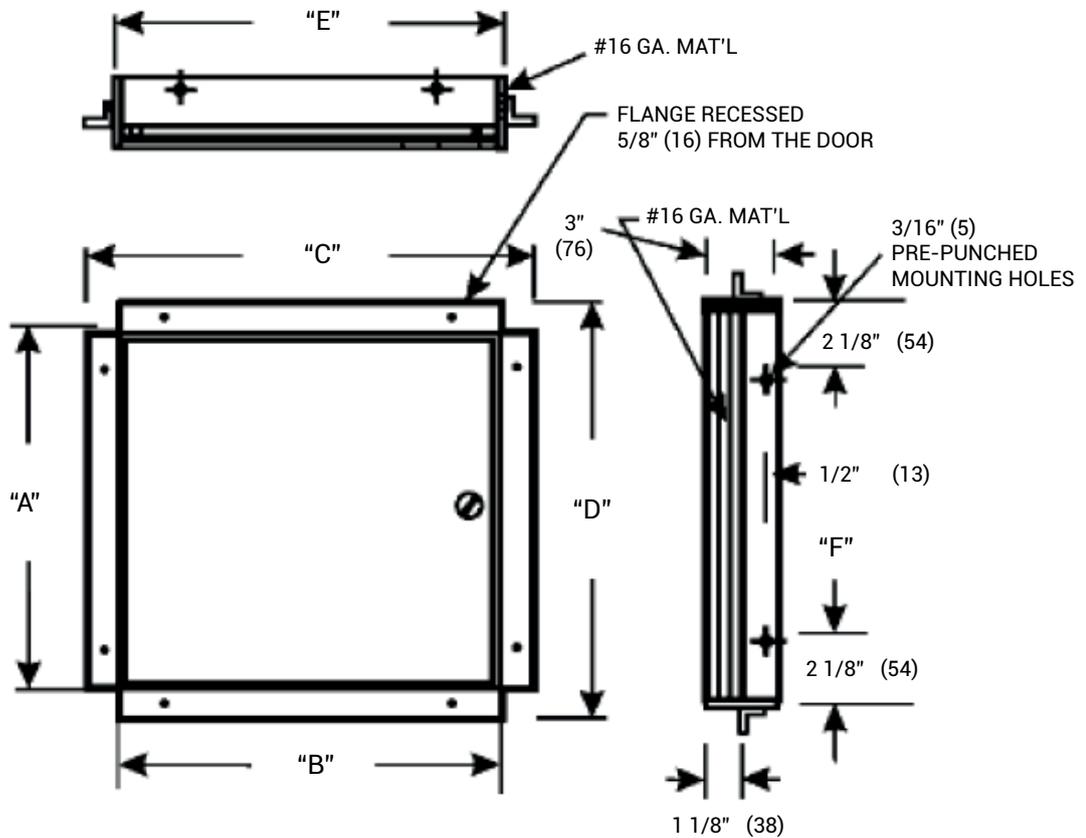

For detailed specifications see submittal sheet

For a complete list of options visit www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



CAD FR

CEILING OR WALL ACCESS DOOR FIRE RESISTANT

"B" X "A"	WALL OPENING	SHIP WEIGHT (Lbs.)	LATCHES	MILD STEEL MODEL #	STAINLESS STEEL MODEL #
12" x 12"	12 1/2" x 12 1/2"	7.3	1	CAD-FR1212	CAD-FRSS1212
18" x 18"	18 1/2" x 18 1/2"	12.5	1	CAD-FR1818	CAD-FRSS1818
24" x 24"	24 1/2" x 24 1/2"	21.8	3	CAD-FR2424	CAD-FRSS2424
22" x 30"	22 1/2" x 30 1/2"	26.0	4	CAD-FR2230	CAD-FRSS2230

A-B Recess Area - Door Size - Minus 3/16" (5)

C-D Overall Dimensions - Door Size - Plus 2 1/4" (57)

E-F Wall Opening - Door Size - Plus 3/16" (5)

SUFFIX	OPTIONAL VARIATIONS
■ - A	Allen key lock
■ - BA	Buy American Act compliant product
■ - C	Cylinder key lock
■ - PA	Pennsylvania Steel Act compliant product
■ - VP	Vandal resistant hardware (VP Screwdriver included)

(Dimension) Denotes Millimetres

Note: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.

CALIFORNIA PROPOSITION 65 WARNING.

This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.