



# SUBMITTAL/TECHNICAL DATA SHEET

## SPECIFICATION

### CONSTRUCTION:

- Frame shall be 3/16" x 2" x 2" angle welded with joints ground smooth.
- Flange shall be 2" wide.
- Door shall be 12 gauge steel.
- Hinges shall be heavy duty and welded to door and frame.
- Locks shall be flush to finished surface of door and shall be spanner head (tamperproof). Key operated cylinder lock with automatic dust shutter is also available, or doors can be prepped to accommodate rim cylinder locks.
- 1/4" mounting holes are included on all frames, masonry anchor straps are optional.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel.




SKU: **DSB 123SD MS**

**MEDIUM SECURITY ACCESS DOOR**




## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

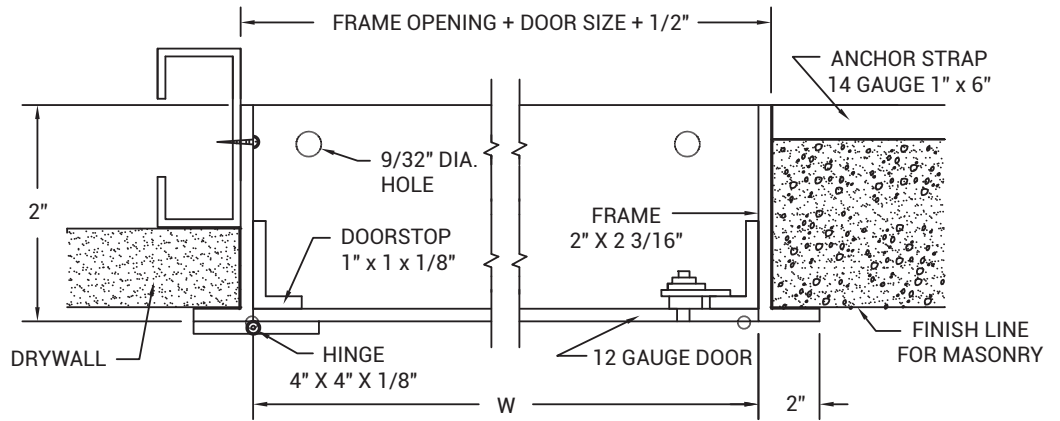

### STANDARD SIZES:

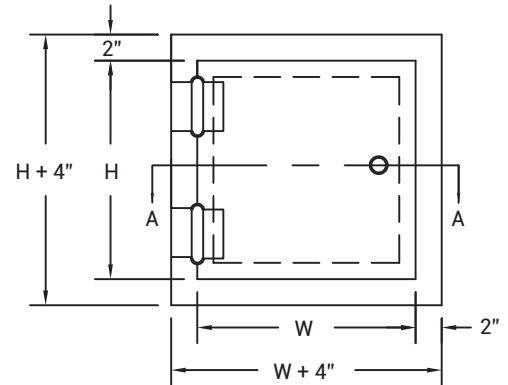

DOOR SIZE W x H (IN.)	WALL/CEILING OPENING (IN.)	SHIP WT. (LBS.)
12 x 12	12 1/2 x 12 1/2	24.0
16 x 16	16 1/2 x 16 1/2	32.0
18 x 18	18 1/2 x 18 1/2	36.0
24 x 24	24 1/2 x 24 1/2	52.0
24 x 36	24 1/2 x 36 1/2	68.0
36 x 36	36 1/2 x 36 1/2	95.0



For a complete list of options visit  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

## PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and  
 Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
 1-888-457-1275  
 FAX:  
 1-888-626-2907



PO BOX 66738 #76520,  
 SAINT LOUIS, MO  
 63166-6738  
 USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
 E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)