



SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

The DSC-214PL has an expansion casing bead with galvanized lath providing a neat, tight protected finish between frame and plaster, while furnishing added plaster reinforcement.

SPECIFICATION

CONSTRUCTION:

- Frame shall be 14 gauge steel and door shall 16 gauge steel.
- Door shall be recessed 1/2" and lined with self furring 3.4 lb. flat rib galvanized steel lath.
- Hinge shall be concealed pivoting rod type.
- Locks shall be flush and screwdriver operated with cam and studs, or shall be key operated cylinder lock with automatic dust shutter.
- Brass sleeves shall be spot welded to door to protect plaster around cam and stud.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel.

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **DSC 214 PL S**


FLUSH ACCESS DOOR

FOR PLASTERED SURFACES




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

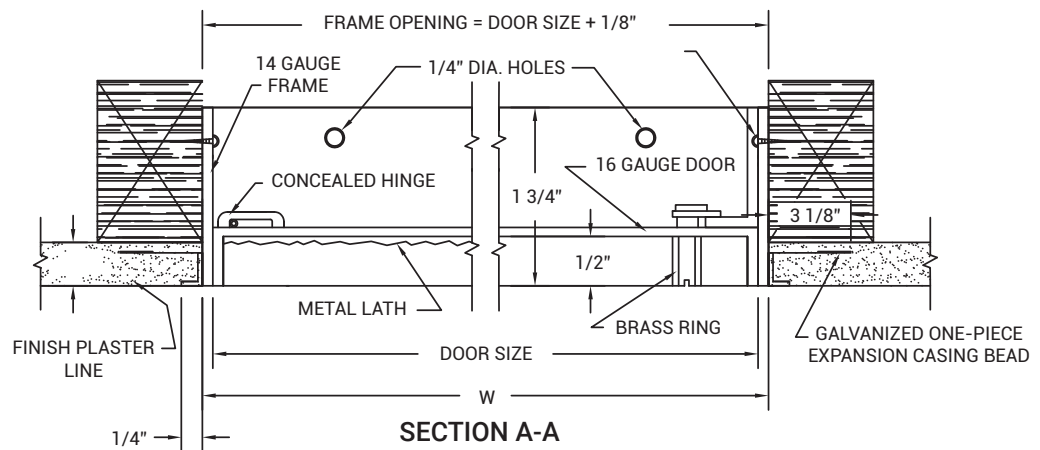

STANDARD SIZES:

DOOR SIZE W x H (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF STUD LATCHES	SHIP WT. (LBS.)
12 x 12	12 1/8 x 12 1/8	1	6.7
18 x 18	18 1/8 x 18 1/8	2	12.4
12 x 24	12 1/8 x 24 1/8	2	10.6
24 x 24	24 1/8 x 24 1/8	2	19.2
24 x 36	24 1/8 x 36 1/8	2	32.0

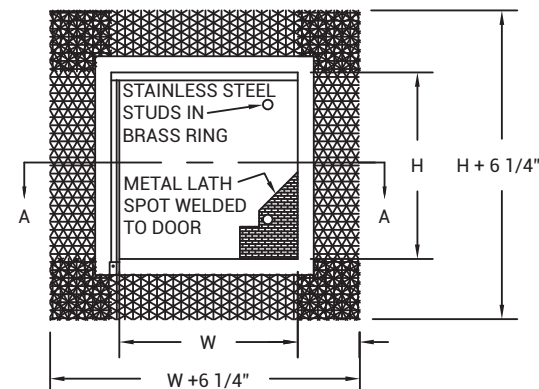

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com