

Doors are designed to provide access to equipment installed within ducts. The door panels are insulated and gaskets between the panel and frame will assure tight seals without obstruction in the air system.

Door and Frame are fabricated from 24 gauge, galvanized steel.

Door is 1" thick, double wall construction and insulated.

Frame is provided with knock-over tabs and easily attached to the duct.

Hinge is continuous piano type.

Cam Latch is self-tightening and hand operated.

GUIDE SPECIFICATION

Duct Access Doors (specify model number and options). Access door and frame shall be fabricated from 24 gauge, galvanized steel. The door shall be 1" thick, double wall construction and insulated. Frame shall have knock-over edges for attaching to duct. Hinge shall be a continuous piano type. Cam latch shall be self-tightening and hand operated.

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

□ -DT Duct Access Door

SUFFIX OPTIONS

□ -CNH Cam Latch-Non Hinged

SKU: DT DUCT ACCESS DOORS




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE (W X H)	CEILING OPENING (Minimum Required)	LATCHES	WEIGHT
DT 6" x 6"	4-3/4" x 4-3/4"	1	1.5 lbs.
DT 8" x 8"	6-3/4" x 6-3/4"	1	2.5 lbs.
DT 10" x 10"	8-3/4" x 8-3/4"	1	3 lbs.
DT 12" x 12"	10-3/4" x 10-3/4"	1	4 lbs.
DT 14" x 14"	12-3/4" x 12-3/4"	2	5 lbs.
DT 16" x 16"	14-3/4" x 14-3/4"	2	7 lbs.
DT 18" x 18"	16-3/4" x 16-3/4"	2	8 lbs.
DT 20" x 20"	18-3/4" x 18-3/4"	2	11 lbs.
DT 24" x 24"	22-3/4" x 22-3/4"	2	13 lbs.

SUBMITTAL/TECHNICAL DATA SHEET

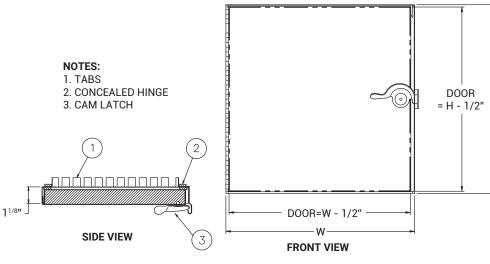

For a complete list of options visit www.AccessDoorsAndPanels.com



To view Pricing and Additional Product Info.

PROJECT DATA

PROJECT NAME :	QTY	w	н	OPTIONS	
ARCHITECT :					
DEALER :					
CONTRACTOR :					
OCATION :	SPECIAL INSTRUCTIONS :				
DATE :					
AGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)				







WEBSITE: www.AccessDoorsAndPanels.com

н

E-MAIL: info@AccessDoorsAndPanels.com

Custom Sizes Available - Fast!