

SUBMITTAL/TECHNICAL DATA SHEET



SPECIFICATIONS

01. Frame with capflashing (corners full welded)
E-50 - 11gauge aluminum
02. Pintle hinge
03. Gasket (All around cover)
04. Cover gauge
E-20 - 11gauge aluminum
05. Cover liner
E-20 - 18gauge aluminum
06. Spring lifting mechanism
07. 1" Fiberboard curb insulation
08. Slam latch
09. Inside and outside handles with padlock hasps
10. Arm guide bracket
11. 1" Fiberglass cover insulation
12. Hold open arm with red vinyl grip
13. Neoprene gasket
14. Guide arm (If req'd)
15. Bilclip® flashing system
16. Lock strike and padlock hasp

SHOP FINISH:

- COVER: red oxide primer
FRAME: red oxide primer
HARDWARE: non-corrosive materials
(Unless otherwise specified)


This product may be installed on either a flat or sloping roof. When installed on a slope, the hinge side must run parallel with the slope. If slope exceeds 30°, advise factory for modification.

For a complete list of options visit
www.AccessDoorsAndPanels.com

QTY	TYPE	MATERIAL
<input type="checkbox"/>	E-50	ALUMINUM COVER/ALUM. FRAME
TYPE E SIZE 3'-0" X 3'-0" (WIDTH X HEIGHT)		
914mm x 914mm		




SKU: **E-50HZ**

SINGLE LEAF ROOF ACCESS HATCH - TYPE E

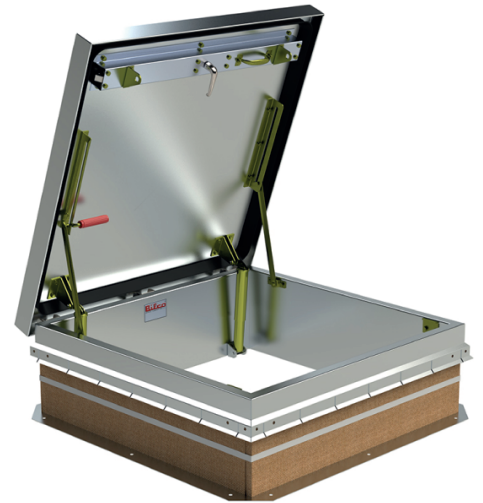


DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

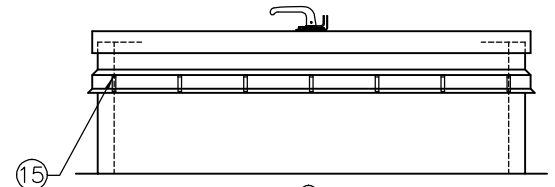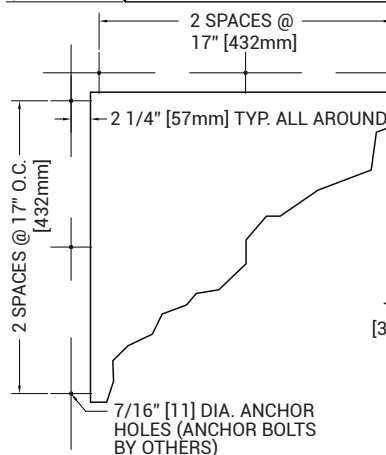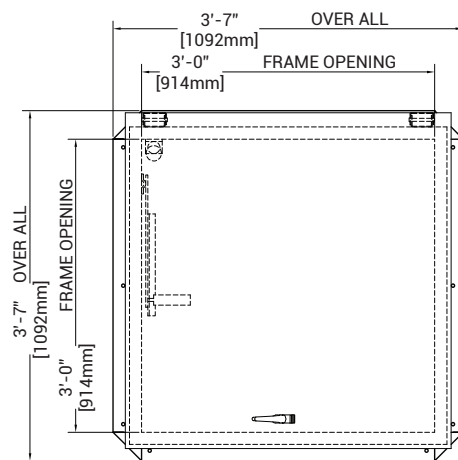

ANCHOR HOLE LAYOUT

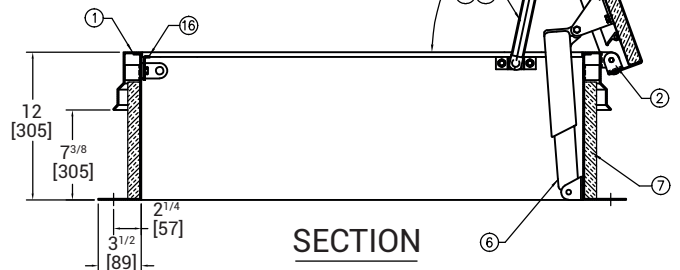

SECTION

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com