


AP Series



Acoustical Plaster Access Doors

Doors are designed to install flush with the plaster surface assuring an attractive finish. Doors are recessed 5/8" and lined with a metal lath to allow plaster of surrounding surfaces to fill in the face of the door.

Door and Frame are fabricated from 16 gage, galvannealed steel with a prime coat finish.

Frame has a 3" wide metal lath on all four sides to key into the plaster.

Concealed Hinge is recessed and operates completely out of sight so that only the metal thickness of the door and frame is visible.


Latch is screwdriver operated.

Finish is a prime coat suitable for painting.

Guide Specification

Provide Elmdor[®] AP Series, Acoustical Plaster Access Doors (specify model number and options). Access door and frame shall be fabricated from 16 gage, galvannealed steel with a prime coat finish. The door shall be recessed 5/8" and be lined with metal lath. The frame shall have a 3" wide metal lath on all four sides. Hinge shall be concealed type. Latch shall be screwdriver operated. Finish shall be a prime coat suitable for painting.

Click here to Online Product Page and Pricing





MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

AP Acoustical Plaster Access Door


Suffix Options

🗋 -AKL	Allen Key Latch
🗋 -CL	Cylinder Lock (o
🗋 -SS	Stainless Steel (

- ock (one per door) Stainless Steel Construction.
 - Type 304 No 4 Finish Satin Finish

STANDARD AVAI LABLE SIZES Special sizes available upon request.

NOMI NAL DOOR SI ZE (W X H)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
AP 12" x 12"	12-1/4" x 12-1/4"	1	7 lbs.
AP 12" x 24"	12-1/4" x 24-1/4"	2	13.5 lbs.
AP 18" x 18"	18-1/4" x 18-1/4"	2	14 lbs.
AP 24" x 24"	24-1/4" x 24-1/4"	2	20.5 lbs.
AP 24" x 36"	24-1/4" x 36-1/4"	2	24.5 lbs.

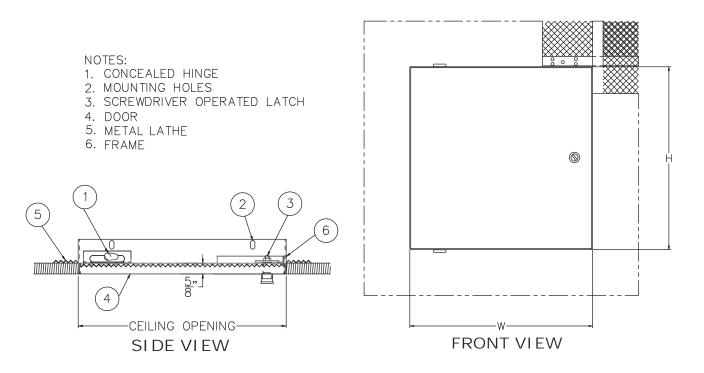

Click here to Online Product Page and Pricing

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING			
Model Number & Options	Quantity		
Company	Date		
ContactTitle			
Approval for Manufacturing/Signature			
AP	Revised: 3/24/09		