

PW Series



Plastered Wall Access Doors

Doors are designed specifically to meet the needs of plaster construction. Door has 3/4" plaster ground for plaster finish.

Door and Frame are fabricated from 16 gage, galvanized steel with a prime coat finish.

Frame has 1/4" mounting holes to facilitate installation.

Concealed Pivoting Rod Hinge prevents distortion and closes door squarely.

Latch is screwdriver operated.

Finish is prime coat suitable for painting.

Guide Specification

Provide Elmdor® PW Series, Plastered Wall Access Doors (specify model number and options). Access door and frame shall be fabricated from 16 gage, galvanized steel with a prime coat finish. The door shall have a concealed pivoting rod hinge and a screwdriver operated latch. Finish shall be a prime coat suitable for painting.

[Click here to Online Product Page and Pricing](#)



Member of U.S. Green
Building Council

PW

Revised: 3/24/09

Recyclable
Product



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

PW Plastered Wall Access Door


Suffix Options

- AKL Allen Key Latch
- CL Cylinder Lock (one per door)
- SS Stainless Steel Construction.
(Type 304 No 4 Finish Satin Finish)

STANDARD AVAILABLE SIZES

Special sizes available upon request.


| NOMINAL DOOR SIZE (W X H) | WALL OPENING (minimum required) | LATCHES | WEIGHT |
|---------------------------|---------------------------------|---------|-----------|
| PW 8" x 8" | 8-1/4" x 8-1/4" | 1 | 3.5 lbs. |
| PW 8" x 12" | 8-1/4" x 12-1/4" | 1 | 5 lbs. |
| PW 10" x 10" | 10-1/4" x 10-1/4" | 1 | 5.5 lbs. |
| PW 12" x 12" | 12-1/4" x 12-1/4" | 1 | 6 lbs. |
| PW 12" x 16" | 12-1/4" x 16-1/4" | 1 | 7.5 lbs. |
| PW 12" x 18" | 12-1/4" x 18-1/4" | 1 | 8.5 lbs. |
| PW 12" x 24" | 12-1/4" x 24-1/4" | 3 | 12 lbs. |
| PW 14" x 14" | 14-1/4" x 14-1/4" | 2 | 7.5 lbs. |
| PW 16" x 16" | 16-1/4" x 16-1/4" | 2 | 9.5 lbs. |
| PW 16" x 20" | 16-1/4" x 20-1/4" | 2 | 12 lbs. |
| PW 18" x 18" | 18-1/4" x 18-1/4" | 2 | 11 lbs. |
| PW 18" x 24" | 18-1/4" x 24-1/4" | 3 | 17.5 lbs. |
| PW 20" x 24" | 20-1/4" x 24-1/4" | 3 | 21 lbs. |
| PW 20" x 30" | 20-1/4" x 30-1/4" | 3 | 22 lbs. |
| PW 24" x 24" | 24-1/4" x 24-1/4" | 3 | 20 lbs. |
| PW 24" x 30" | 24-1/4" x 30-1/4" | 3 | 23.5 lbs. |
| PW 24" x 36" | 24-1/4" x 36-1/4" | 3 | 27 lbs. |
| PW 30" x 30" | 30-1/4" x 30-1/4" | 3 | 30 lbs. |
| PW 36" x 36" | 36-1/4" x 36-1/4" | 3 | 38 lbs. |

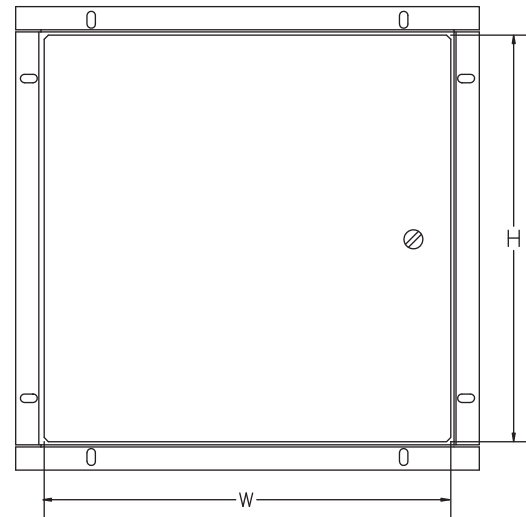

FRONT VIEW

NOTES:

1. CONCEALED PIVOTING ROD HINGE
2. FRAME
3. MOUNTING HOLES
4. CERAMIC TILE OVER PLASTER
5. SCREWDRIVER OPERATED LATCH
6. DOOR
7. FINISH LINE, PLASTER OVER MASONRY

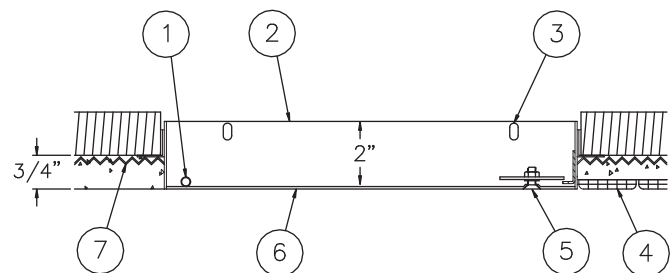

SIDE VIEW

[Click here to Online Product Page and Pricing](#)

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

| | |
|--|----------------|
| Model Number & Options _____ | Quantity _____ |
| Company _____ | Date _____ |
| Contact _____ | Title _____ |
| Approval for Manufacturing/Signature _____ | |

PW

Revised: 3/24/09