

SUBMITTAL/TECHNICAL DATA SHEET

MILCOR

SPECIFICATIONS

MATERIAL:

- F: 1/4" Aluminum Tread Plate and extruded aluminum frame.
- T: 1/4" Aluminum Plate and extruded aluminum frame

FINISH: Mill Finish

COVER:

- F: Diamond patterned safety tread plate designed to support 150 psf live load.
- T: 1/4" Recessed smooth cover with extruded tile stop for floor tile to support 150 psf live load.

FRAME: F & T: 1/4" Extruded aluminum frame with strap-type anchors bolted onto frame.

GASKET: 1/16" Neoprene gasket adhered to frame.

LATCH: Snap Latch.

HANDLE: Inside handle and removable outside T handle.

LIFT ASSISTANCE: Torsion Bar.

HARDWARE: Zinc plated.


SKU: **F-SEC-SL**

ALUMINUM CONSTRUCTION FLUSH SECURITY FLOOR DOOR



DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

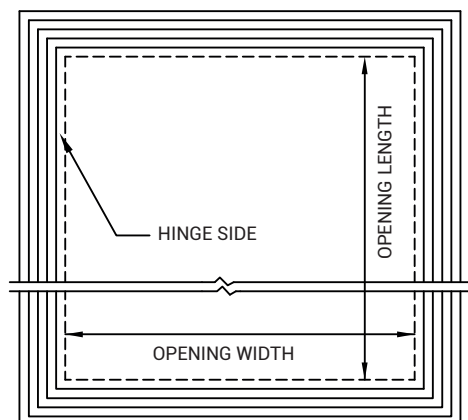

STANDARD SIZES:

ITEM NUMBER	MODEL NUMBER	INSIDE DIMENSION WIDTH x LENGTH
3515-302-9	F-2424	24" x 24"
3515-305-9	F-3030	30" x 30"
3515-308-9	F-3630	36" x 30"
3515-311-9	F-3636	36" x 36"

* ALL ALUMINUM WELDED CONSTRUCTION
* SUPPORTS 150PSF UNIFORMLY DISTRIBUTED LOAD

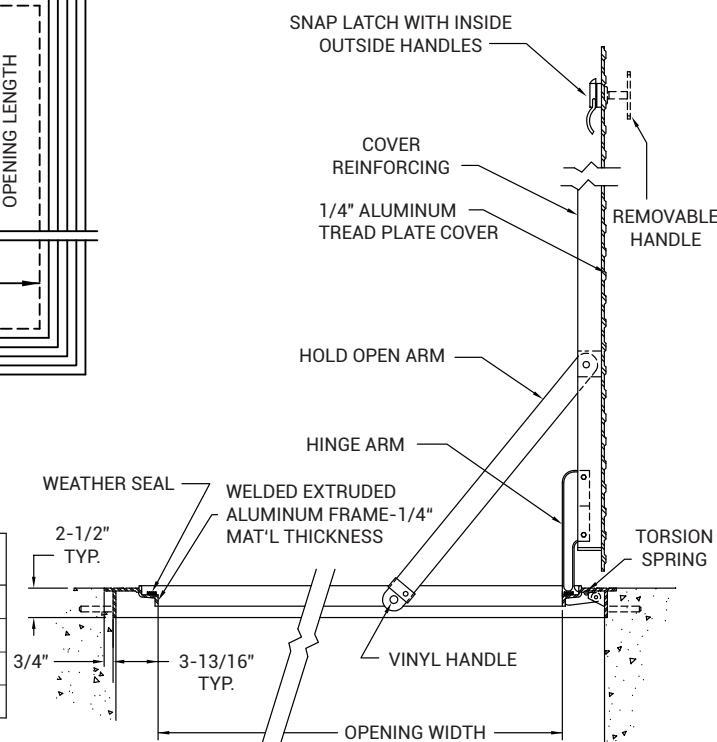

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@accessdoorsandpanels.com