



SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

JL's 3 hour fire rated model is available up to a 48" x 48", with a maximum temperature rise of 250°F (139°C) at 180 minutes. These doors are built to give years of trouble-free service.

SPECIFICATIONS

EXTERIOR FRAME MATERIAL: 12 ga (2.75 mm) galvanized steel, supplied with stainless steel anchor straps.

DOOR PANEL MATERIAL: 1/4" (6.35mm) aluminum diamond plate.

DOOR LINER MATERIAL: 14 ga (1.99 mm) galvanized steel.

DEPTH: 6-1/2" (165 mm)

STANDARD FINISH:

Door and Frame: Gray primer.
Concrete Install Outer Frame:
Bituminous coating.

INSULATION:

High temperature insulation in door.

LATCH: 316 Stainless steel slam latch with removable cover plug, operable from the top side by a removable tool and underside by a spoon handle.

HINGE: Heavy duty continuous stainless steel piano hinge.

LIFT ASSIST: 316 Stainless steel nitrogen cylinder(s).

Live Load: 150 psf

SIZES:

Minimum 30" x 24"
Maximum 48" x 48"

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **FFD3**

**3 HOUR FIRE-RATED
FLOOR DOOR**



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

MODEL	ORDER SIZE		APPROX. WEIGHT
	WIDTH	LENGTH	
FFD3-3030	30"	30"	219 lbs.
FFD3-3036	30"	36"	263 lbs.
FFD3-3048	30"	48"	350 lbs.
FFD3-3630	36"	30"	263 lbs.
FFD3-3636	36"	36"	315 lbs.
FFD3-3648	36"	48"	420 lbs.
FFD3-4242	42"	42"	429 lbs.
FFD3-4254	42"	54"	551 lbs.
FFD3-4848*	48"	48"	560 lbs.

ORDER SIZE = FRAME INSIDE DIMENSION



FIRE-RATING INFORMATION

Warnock Hersey Intertek listed and labeled to
NFPA-288, ASTM E-119, CAN/ULC-S101,
NFPA25, NFPA-252, UL-10B, CAN/ULC-S104

*Clear opening for sizes greater than 48" x 48" on page 3.

Note: Floor Door is not to be exposed to rain or wet environments. Intended for dry location use only.

For detailed specifications see submittal sheet

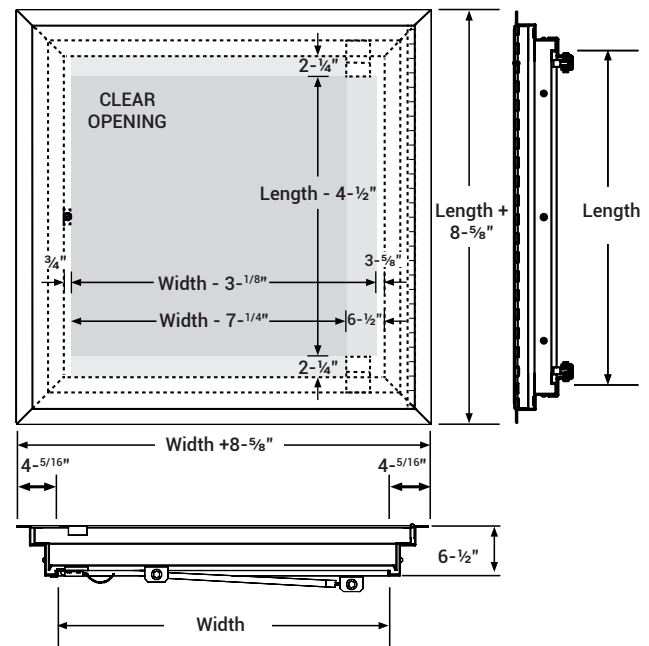

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



SUBMITTAL



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907





PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA




WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com

FFD3


3 HOUR FIRE-RATED FLOOR DOOR

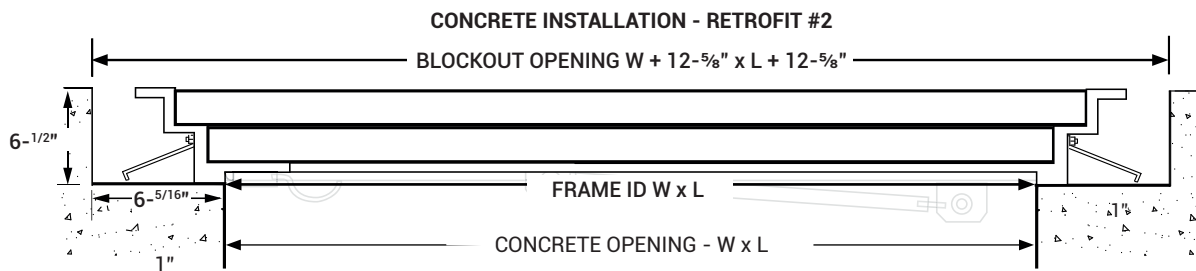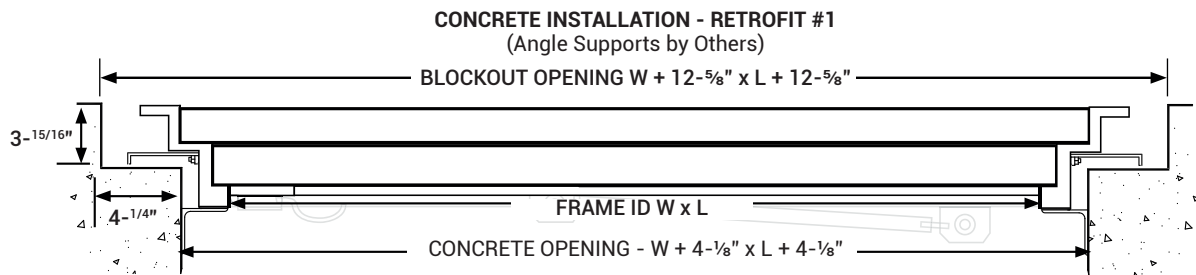

Designed to be cast in place or the above retrofit options.



Standard Latch



Optional Recessed Turn Handle

ADDITIONAL OPTIONS:

☐	Self Closing Mechanism- Fusible link activates at 165°F.	(SC)
☐	300 lb/ft ² live load.	(3C)

**Available on sizes 36" x 54" and smaller

LATCH AND HANDLE OPTIONS:

☐	Recessed Stainless Steel Turn Handle Topside**	(T)
☐	Padlock Hasp Underside.	(P)
☐	Recessed Stainless Steel Turn Handle Topside with Detention Lock Underside**	(D)
☐	Detention Lock Topside with Operable Knob Underside	(E)

DOOR PANEL OPTIONS:

☐	1/4" (6.35 mm) Aluminum Smooth Door	(25AS)
--------------------------	-------------------------------------	--------



SUBMITTAL



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907




PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com


FFD3

3 HOUR FIRE-RATED FLOOR DOOR

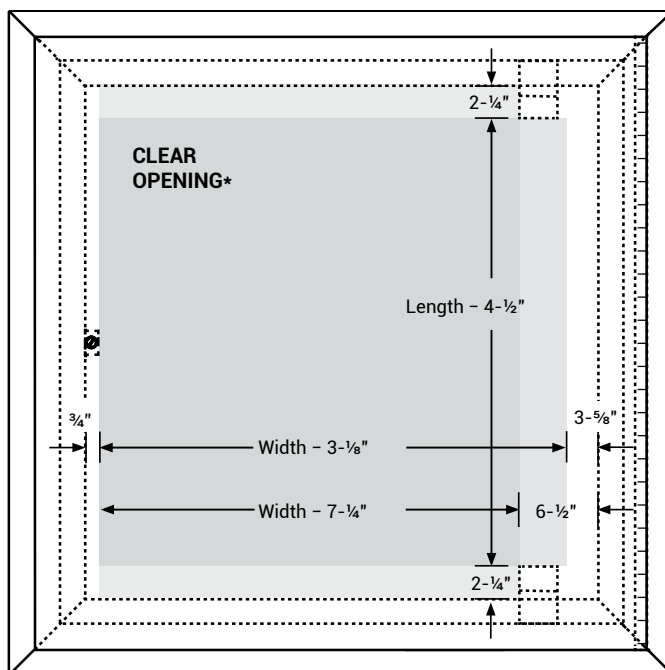

Single Cylinder Brackets

For dimensions smaller than 48" x 48"

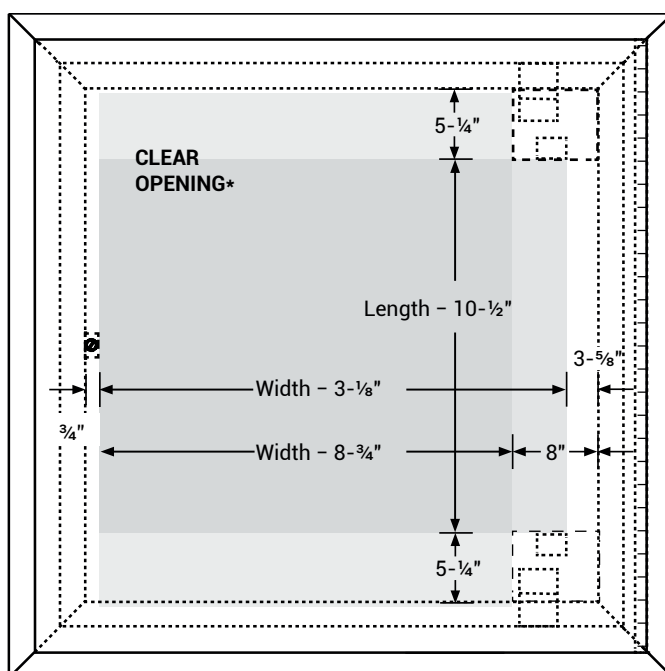

Dual Cylinder Brackets

For 48" x 48" or larger sq ft