


DETAIL & SUBMITTAL SHEET



FRONT ELEVATION

Anchor straps standard on all fire-rated doors

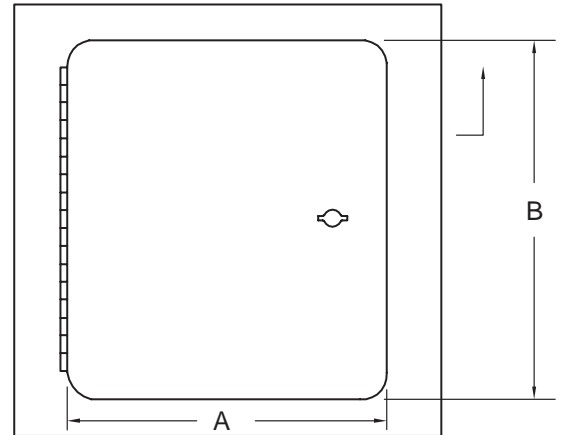

SPECIFICATIONS:

Door: 14 ga. steel.

Frame: 16 ga. steel, 2 1/2" deep

Hinge: Continuous piano hinge. Allows opening to 180°.

Latches: Self-latching direct action latch accepts both key and knurled knob

Automatic Panel Closer: Furnished on all doors. Vertical position only


Inside Panel Release: Furnished on all doors

Finish: grey baked enamel coat

OPTIONS (at additional cost)

- Mortise Best Lock and locks by others
- Hot Smoke Seal gasketing all 4 sides**
- Special sizes available

SECTION DETAIL

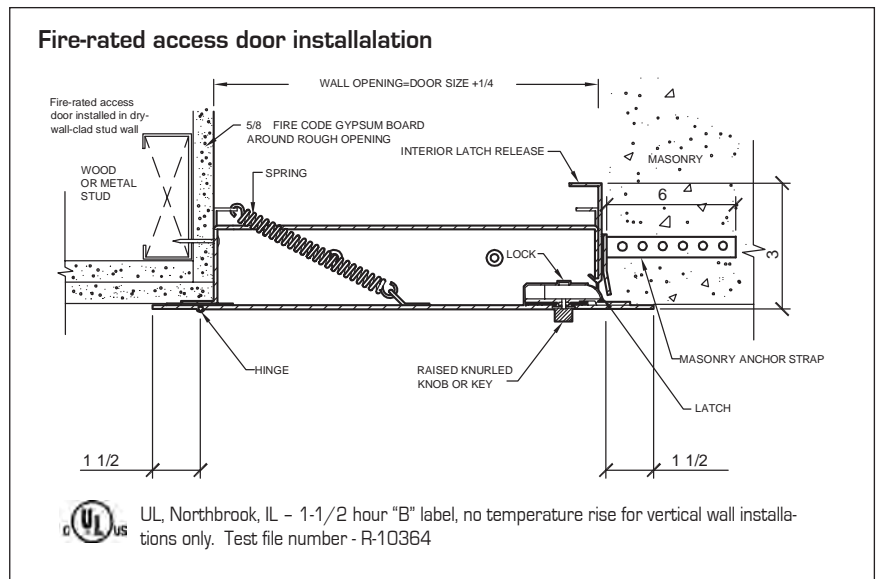

Item No.	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
FRB 900	8 x 8	8 1/4 x 8 1/4	1	8
FRB 900	10 x 10	10 1/4 x 10 1/4	1	10
FRB 900	12 x 12	12 1/4 x 12 1/4	1	12
FRB 900	14 x 14	14 1/4 x 14 1/4	1	14
FRB 900	16 x 16	16 1/4 x 16 1/4	1	17
FRB 900	18 x 18	18 1/4 x 18 1/4	1	21
FRB 900	20 x 20	20 1/4 x 20 1/4	1	24
FRB 900	22 x 22	22 1/4 x 22 1/4	1	28
FRB 900	22 x 30	22 1/4 x 30 1/4	1	29
FRB 900	22 x 36	22 1/4 x 36 1/4	1	30
FRB 900	24 x 24	24 1/4 x 24 1/4	1	32
FRB 900	24 x 30	24 1/4 x 30 1/4	2	43
FRB 900	24 x 36	24 1/4 x 36 1/4	2	50
FRB 900	30 x 30	30 1/4 x 30 1/4	2	50
FRB 900	36 x 36	22 1/4 x 22 1/4	2	60

[Click here to Online Product Page and Pricing](#)

AccessDoorsAndPanels

Phone: 1-800-609-2917
Fax: 1-888-626-2907

Email: info@accessdoorsandpanels.com
Website: www.AccessDoorsAndPanels.com
 PO Box 66738 #76520, Saint Louis, MO 63166 6738



www.AccessDoorsAndPanels.com