



SUBMITTAL/TECHNICAL DATA SHEET

www.AccessDoorsAndPanels.com

APPLICATION

- For installation in drywall walls requiring concealing of the door panel consistent to surroundings
- For use in walls, fire-rated for up to 90-minutes with a temperature rise of max 250°C (450°F) over 30 minutes

FEATURES

- Recessed reinforced door fitted with 5/8" Fire-rated drywall.
- Concealed hinge & self-centering device ensures seamless appearance in walls
- Self-closing & self-latching door mechanism
- Perforated Frame ensures trouble-free application of skim coat to edge of the door
- Zinc coated steel provides superior corrosion resistance
- Testing standards UL 10(b) and ULC S104

SPECIFICATIONS

DOOR: Steel-22 Gauge recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site.

DOOR FRAME: Steel-22 Gauge press bent for strength and rigidity with pre-punched flanges for convenient mounting and accepting skim coat finish on site

HINGE: Concealed

FIRE RATING (WALLS): Meets 1½ hour fire rating requirement in accordance with UL 10(b) and CAN/ULC S104-10 for max size up to 24" x 36"

LATCH: Self-latching bolt, operated by flush key

FINISH: Satin coat steel

For a complete list of options visit www.AccessDoorsAndPanels.com

SKU: **FW-5015**

FIRE RATED ACCESS DOOR

RECESSED FOR DRYWALL WALLS



"1 Latch"

"2 Latches"



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE W x H INCHES (MM)	LATCHES	WEIGHT LBS	KG
12 x 12 (305 x 305)	1	10.0	4.50
16 x 16 (406 x 406)	1	14.0	6.40
18 x 18 (457 x 457)	1	18.0	8.20
24 x 24 (610 x 610)	2	29.0	13.1
26 x 36 (610 x 914)	2	42.0	19.0


Wall opening is W + 3/8" (9 mm)
For detailed specifications see submittal sheet

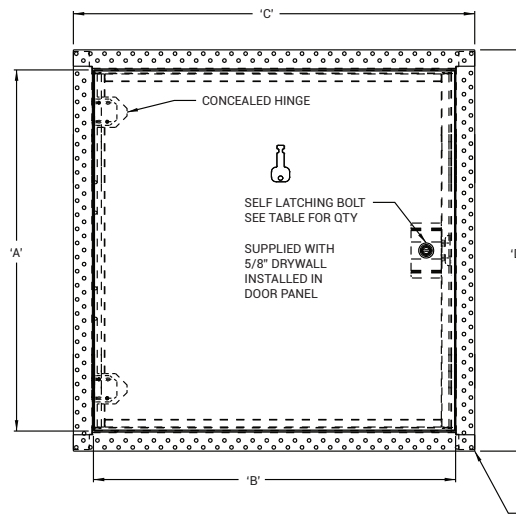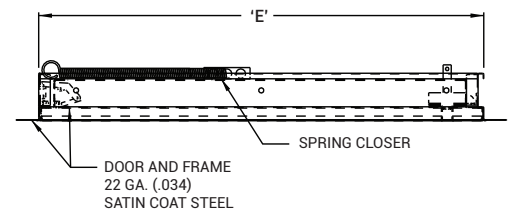

VERTICAL WALLS

FOR USE IN VERTICAL WALLS
FIRE RATED FOR UP TO 90
MINUTES WITH TEMPERATURE
RISE RATING OF MAXIMUM
250° C (450° F) OVER 30
MINUTES. CONFORMS TO:
UL10(B) CERTIFIED TO:
CAN/ULC S104 THIS DOOR HAS
BEEN APPROVED BY WARNOCK
HERSEY INTERNATIONAL (MAX.
SIZE 24" X 36")

PATENT PENDING

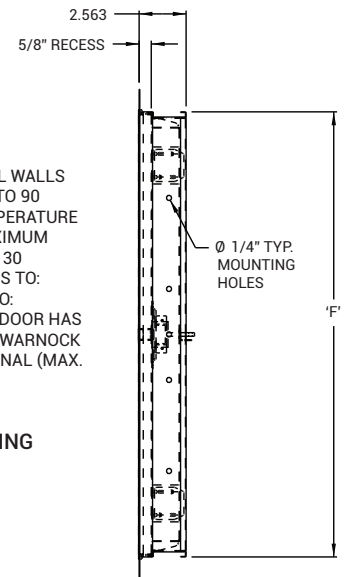

Proprietary property of Acudor Products, Inc., sold and distributed with proper authorization

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA




WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



FW-5015

RECESSED FOR DRYWALL

NOMINAL DOOR SIZE	A	B	C	D	E	F	LOCK
Inches (mm)							
12 x 12 (305 x 305)	11.83 (300)	11.89 (302)	14.48 (368)	14.48 (368)	12.04 (306)	12.04 (306)	1
14 x 14 (356 x 356)	13.83 (351)	13.89 (353)	16.48 (419)	16.48 (419)	14.04 (357)	14.04 (357)	1
16 x 16 (406 x 406)	15.83 (402)	15.89 (404)	18.48 (469)	18.48 (469)	16.04 (407)	16.04 (407)	1
18 x 18 (457 x 457)	17.83 (453)	17.89 (454)	20.48 (520)	20.48 (520)	18.04 (458)	18.04 (458)	1
24 x 24 (610 x 610)	23.83 (605)	23.89 (607)	26.48 (673)	26.48 (673)	24.04 (611)	24.04 (611)	2
24 x 36 (610 x 914)	35.83 (910)	23.89 (607)	26.48 (673)	38.48 (977)	24.04 (611)	36.04 (915)	2

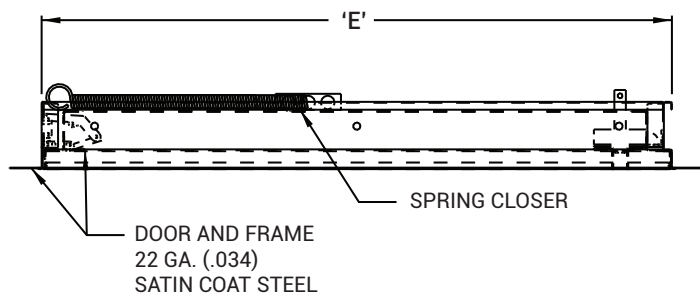

VERTICAL WALLS

FOR USE IN VERTICAL WALLS FIRE RATED FOR UP TO 90 MINUTES WITH TEMPERATURE RISE RATING OF MAXIMUM 250° C (450° F) OVER 30 MINUTES.
CONFORMS TO: UL10(B) CERTIFIED TO: CAN/ULC S104
THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL (MAX. SIZE 24" x 36")

