




SUBMITTAL/TECHNICAL DATA SHEET

Doors are designed to be architectural-ly pleasing with a design which allows the door and frame to blend seamlessly with the gypsum ceiling. With a tapered edge for joint tape, they are easily textured, light weight and will not crack or shrink.


Door and Frame are fabricated from glass reinforced gypsum.

Flange has depressions for screw placement and is tapered for joint compound application.

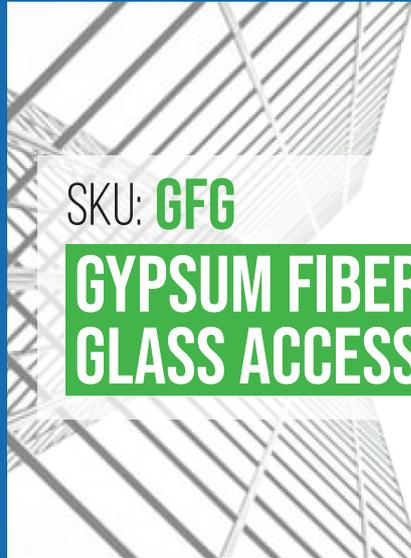

SKU: **GFG**

GYPSON FIBER GLASS ACCESS DOORS

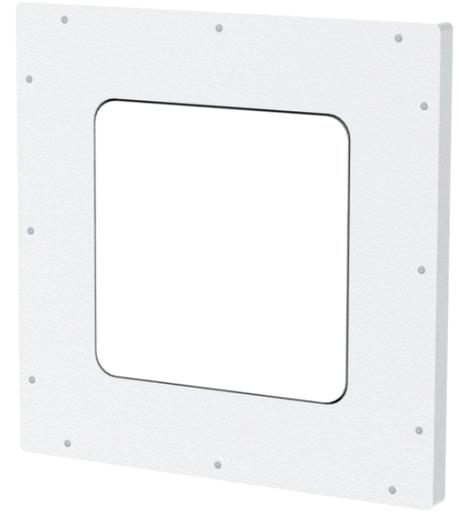

GUIDE SPECIFICATION

Gypsum fiber glass access door (specify model number). Access door and frame shall be fabricated from glass reinforced gypsum. Frame shall have pre-positioned depressions for screw placement and tapered for application of joint compound.

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

□ -GFG Gypsum Fiber Glass

SUFFIX OPTIONS

"No Available Options"



For a complete list of options visit www.AccessDoorsAndPanels.com

DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

NOMINAL DOOR SIZE (W x H)	ROUGH OPENING	WEIGHT LBS
9" x 9"	15" x 15"	5.0 LBS.
12" x 12"	18" x 18"	15.0 LBS.
16" x 16"	22" x 22"	17.0 LBS.
18" x 18"	24" x 24"	20.0 LBS.
22" x 30"	28" x 36"	32.0 LBS.
24" x 24"	30" x 30"	28.0 LBS.
30" x 30"	36" x 36"	40.0 LBS.

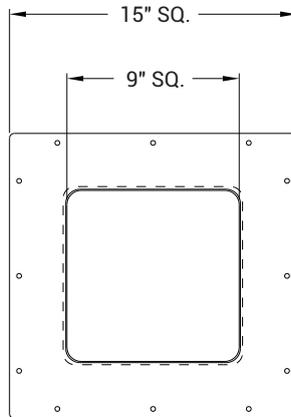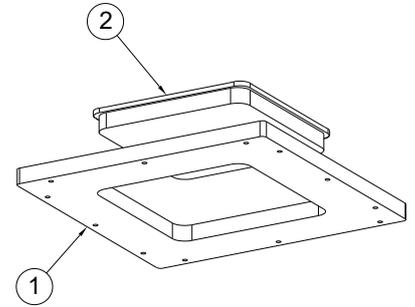

FRONT VIEW

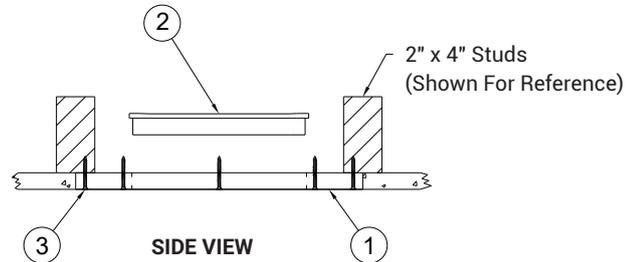

SIDE VIEW

NOTES:

1. PANEL FRAME
2. DOOR
3. MOUNTING HARDWARE (BY OTHERS)

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com